


Micro-Change® Dual Keyway Plugs for High-Flex Applications


Product Specifications

MECHANICAL PLUG FACE MATERIAL: CONTACT MATERIAL: CONTACT PLATING: MOLDED BODY MATERIAL: COUPLING NUT MATERIAL: O-RING: CABLE: OUTSIDE DIAMETER: CABLE STRAIN RELIEF:	NYLON 6/6 COPPER ALLOY GOLD - 5µ IN. (MIN) PALLADIUM/NICKEL - 20µ IN. (MIN) POLYURETHANE ZINC DIECAST EPOXY-COAT (ALSO AVAILABLE IN STAINLESS STEEL OR NON-METALLIC) NITRILE RUBBER COLOR - YELLOW JACKET MATERIAL - PUR CONDUCTOR INSULATION MATERIAL - PVC STRANDING - #18 AWG 168 X #40 UL RECOGNIZED, CSA CERTIFIED 2/C - .24" 3/C - .27" 4/C - .29" 5/C - .32" 35 POUNDS MIN. - PER UL STD. 514	ELECTRICAL VOLTAGE RATING: AMPERAGE: CONTACT RESISTANCE: ISOLATION RESISTANCE: 300VAC/300VDC 2/3 POLE - 7A, 4/5 POLE - 4A ≤5mΩ, (AFTER 500 MATE/UNMATE CYCLES - PER MIL STD. 1344, 3004.1) ≥1000MΩ ENVIRONMENTAL PROTECTION: AMBIENT OPERATING TEMP: CORROSION RESISTANCE: VIBRATION RESISTANCE: HIGH PRESSURE WATER SPRAY: IP 68, NEMA 6P - PER NEMA STD. 250 -20° TO 80°C 500 HOUR SALT SPRAY - PER MIL. STD. 202F 10 - 500 HZ @ 10g - PER MIL STD. 202F, 204D, CONDITION A 1000 PSI CERTIFICATIONS UL: CSA: VDE: UL LISTED, FILE NO. E152210 CSA CERTIFIED, FILE NO. LR6837 SPACINGS TO VDE 0110 GROUP C (250VAC/300VDC)
---	---	---


Straight Male Plug / 2-4 Pole

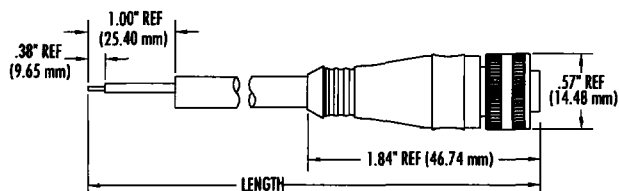


Straight Male Plug / 5 Pole

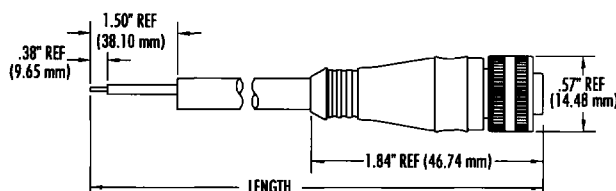


Straight Female Plug / 2-4 Pole

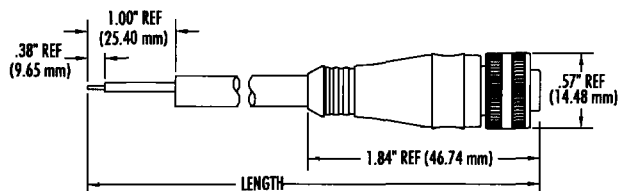


Straight Female Plug / 5 Pole

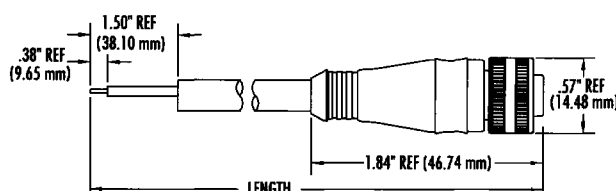


Male Plug with External Threads / 2-4 Pole

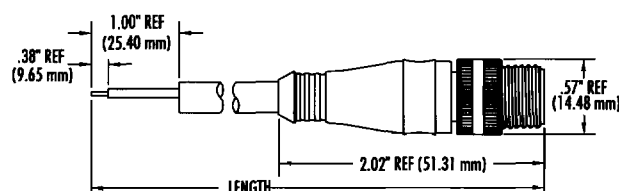

Male Plug with External Threads / 5 Pole

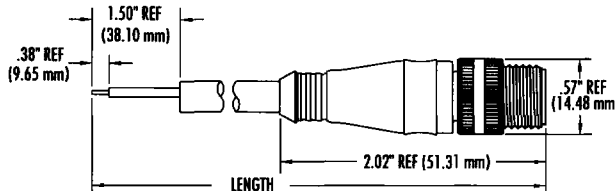


Male/Female Cable Assemblies

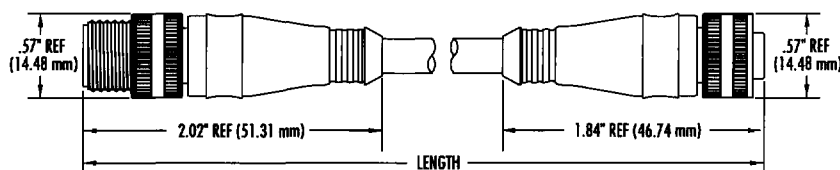


Micro-Change® Dual Keyway Plugs for High-Flex Applications

90° Male & Female Plug /
2-4 Pole

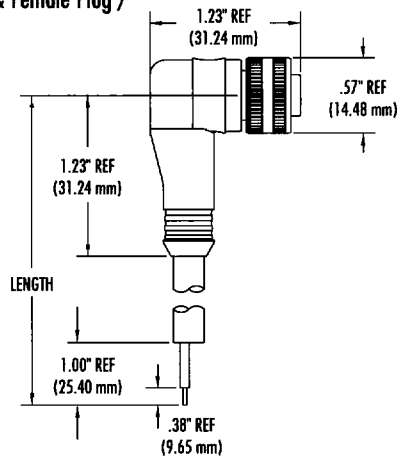

90° Male & Female Plug /
5 Pole

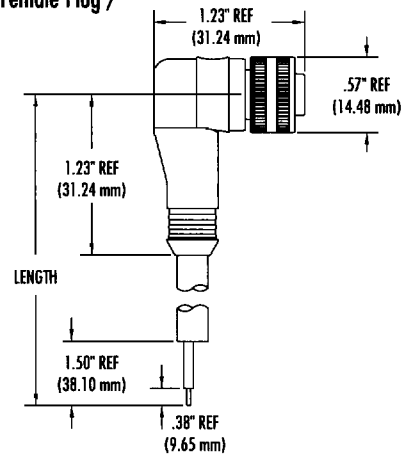

PLUGS AND CABLE ASSEMBLIES WITH PUR CABLE

POLES	FACE VIEW MALE	WIRING CODE	CABLE LENGTH ft/m	STRAIGHT		90°		MALE WITH EXTERNAL THREADS	MALE/FEMALE CABLE ASSEMBLIES
				MALE	FEMALE	MALE	FEMALE		
2		1-BROWN 2-BLUE	6 ft/1.83m	702002B01F060	702000B01F060	702003B01F060	702001B01F060	702006B01F060	772030B01F060
			12 ft/3.66m	702002B01F120	702000B01F120	702003B01F120	702001B01F120	702006B01F120	772030B01F120
			20 ft/6.10m	702002B01F200	702000B01F200	702003B01F200	702001B01F200	702006B01F200	772030B01F200
3		1-GREEN 2-RED/BLACK 3-RED/WHITE	6 ft/1.83m	703002B01F060	703000B01F060	703003B01F060	703001B01F060	703006B01F060	773030B01F060
			12 ft/3.66m	703002B01F120	703000B01F120	703003B01F120	703001B01F120	703006B01F120	773030B01F120
			20 ft/6.10m	703002B01F200	703000B01F200	703003B01F200	703001B01F200	703006B01F200	773030B01F200
4		1-RED/BLACK 2-RED/WHITE 3-RED 4-GREEN	6 ft/1.83m	704002B01F060	704000B01F060	704003B01F060	704001B01F060	704006B01F060	774030B01F060
			12 ft/3.66m	704002B01F120	704000B01F120	704003B01F120	704001B01F120	704006B01F120	774030B01F120
			20 ft/6.10m	704002B01F200	704000B01F200	704003B01F200	704001B01F200	704006B01F200	774030B01F200
5		1-RED/WHITE 2-RED 3-GREEN 4-RED/YELLOW 5-RED/BLACK	6 ft/1.83m	705002B01F060	705000B01F060	705003B01F060	705001B01F060	705006B01F060	775030B01F060
			12 ft/3.66m	705002B01F120	705000B01F120	705003B01F120	705001B01F120	705006B01F120	775030B01F120
			20 ft/6.10m	705002B01F200	705000B01F200	705003B01F200	705001B01F200	705006B01F200	775030B01F200