
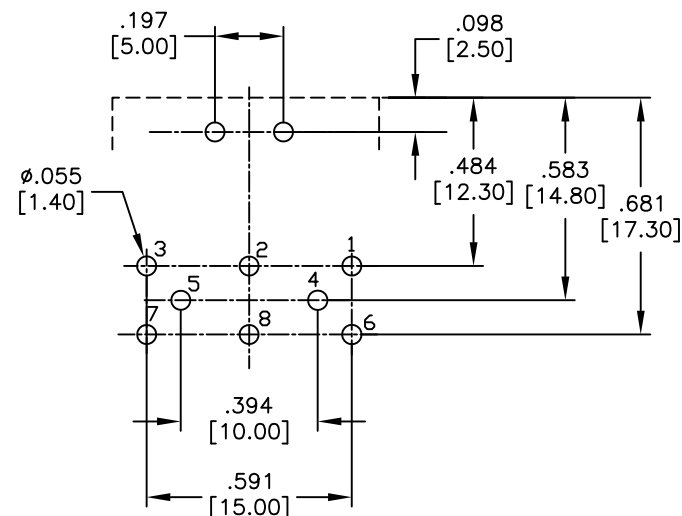
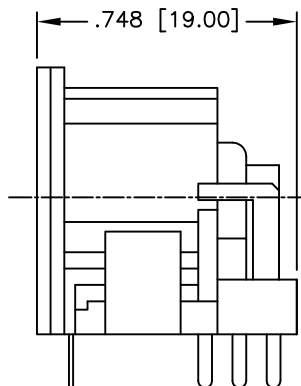


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/21/04	
A		REDRAWN	7/22/10	

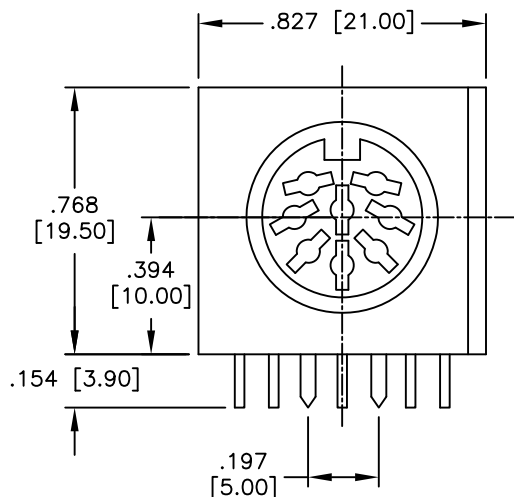

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 20 VDC max.

Current rating: 2 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 500 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +100°C

Environmental:

Lead free, RoHS compliant.



MATING FACE CONFIGURATIONS

DJ-003-.5	DJ-004-.5	DJ-005-.5	DJ-006-.5	DJ-007-.5	DJ-008-.5

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DRAWN	SS	DATE
CHECKED		
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

DIN JACK

.197 [5.00] CENTERLINE FRONT PINS

SIZE

X

PART NO.

DJ-00X-.5

REV.

A

REF: S00013T

SCALE: NTS

SHEET 1 OF 1