
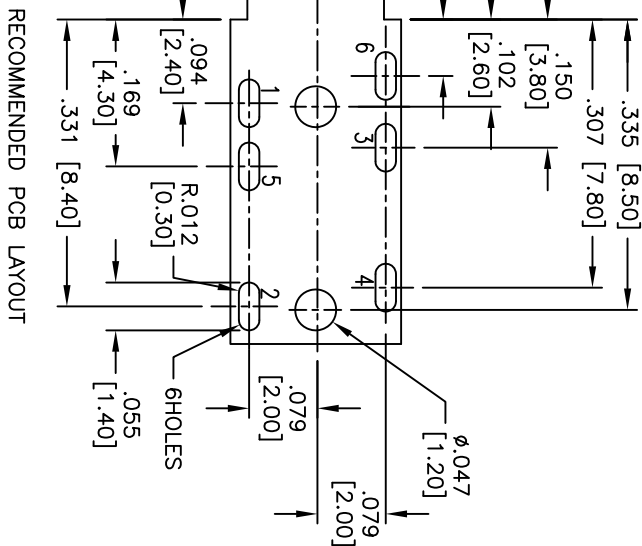
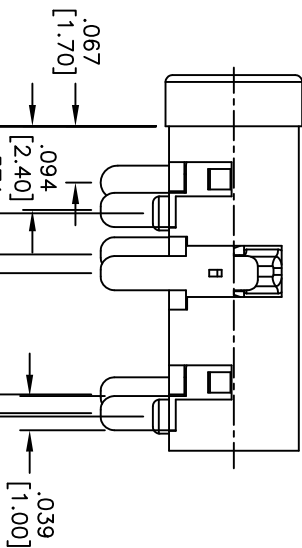
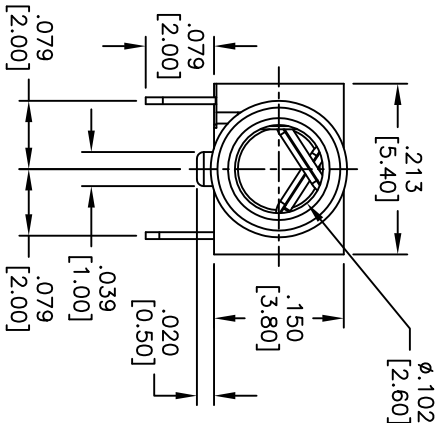
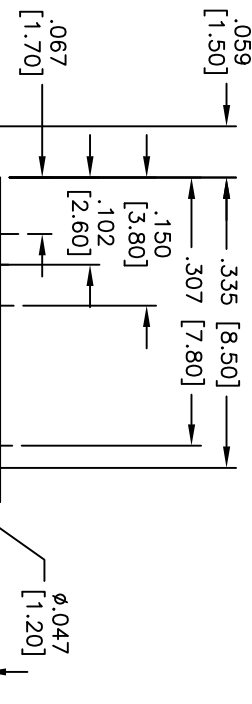




Rev	AWO #	Description	Date	Appr
-		RELEASED	2/08/10	

APPROVED: _____

DATE: _____ TITLE: _____

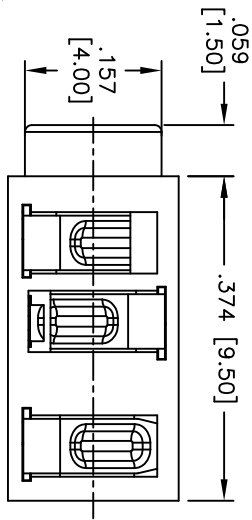

RECOMMENDED PCB LAYOUT

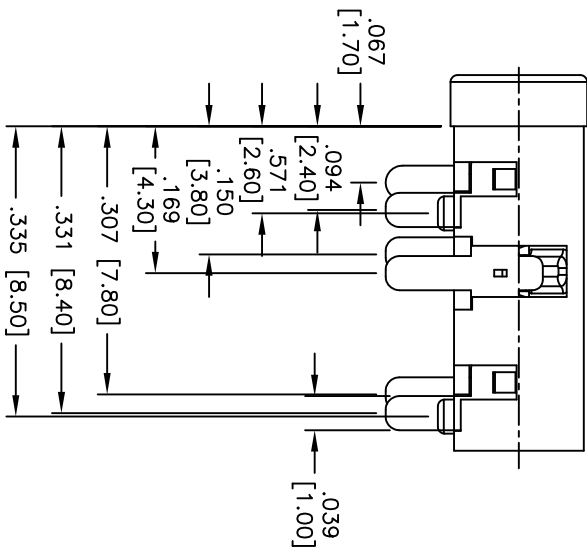

SPECIFICATIONS:

Material:

Insulator: PA9T, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Silver over Copper underplate

Electrical:

Operating voltage: 30 VDC max.

Current rating: 0.5 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MINIATURE JACK

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED												ADAM TECH											
INCHES												Holes											
.X ± .10 ØX ± .10																							
.XX ± .020 ØXX ± .015																							
.XXX ± .015 ØXXX ± .010																							
APPROVALS												TITLE											
DRAWN DY 2/08/10												MINIATURE JACK											
CHECKED												SIZE PART NO.											
APPROVED												X ASJ-120-5-HT											
REF: S00027T												SCALE: NTS											
												SHEET 1 OF 1											
												REV. -											