

CFB0103 Series

Low-Noise GaAs FETs

**Product Specifications**
December 1997

(1 of 2)

Low-Noise GaAs FETs**Features**

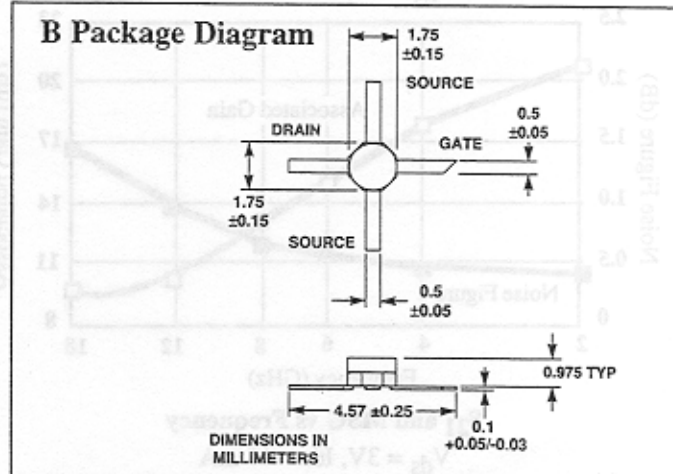
- ☐ High Gain
- ☐ Super Low-Noise
- ☐ Psuedomorphic HEMT
- ☐ 70 Mil Stripline Commercial Package

Applications

- ☐ Point-to-Point Radio Receivers
- ☐ Commercial Communications
- ☐ Industrial Applications

Description

The CFB0103-L series is a family of low-noise, high-gain FETs intended for point-to-point radio, commercial and industrial applications. Manufactured in Celeritek's proprietary, state-of-the-art PHEMT process and assembled in an industry standard, 70 mil stripline commercial package, this

B Package Diagram

cost-effective family of devices is ideally suited for commercial communications applications where reliability, performance and value are critical.

Specifications (TA = 25°C)

Parameter	Vds (V)	Bias Ids (mA)	Frequency (GHz)	Units	Grade	Performance Specifications	Min	Typ	Max
NF _{opt}	3.0	15.0	12.0	dB	L1	—	0.7	0.8	0.8
					L2	—	0.9	1.0	1.0
					L3	—	0.9	1.2	1.2
G _a	3.0	15.0	12.0	dB	L1	9.5	10.0	—	—
					L2	9.0	9.5	—	—
					L3	8.0	9.0	—	—
S ₂₁ ²	3.0	15.0	2.0	dB			13.9		
			10.0	dB			9.8		
			18.0	dB			7.0		
P _{1dB}	6.0	40.0	12.0	dBm			19.0		
g _m	Vds = 3.0V	Vgs = 0V		mS			90.0		
I _{dss}	Vds = 3.0V	Vgs = 0V		mA		30.0	60.0	120.0	
V _p	Vds = 3.0V	Ids = 1mA		Volts		-0.5	-1.3	-2.5	
BV _{gd}	Igd = 100 μA			Volts		-5.5	-8.0		
R _{th}				°C/W			250		

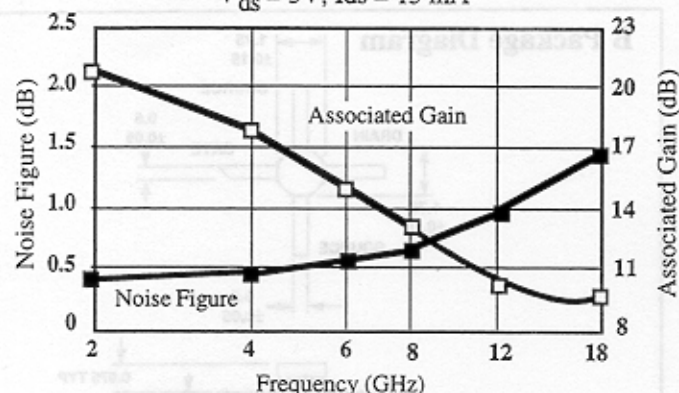
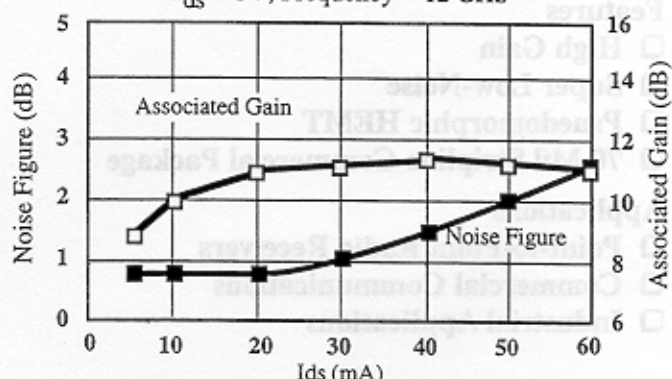
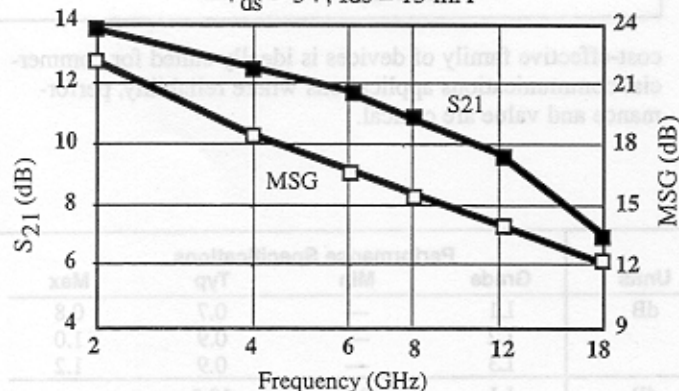
Absolute Maximum Ratings

Parameter	Symbol	Rating
Drain-Source Voltage	Vds	8V
Gate-Source Voltage	Vgs	-5V
Drain Current	Ids	Idss
Continuous Dissipation	Pt	800mW
RF Power In	Pin	+17 dBm
Channel Temperature	Tch	175°C
Storage Temperature	Tstg	-65°C to +175°C

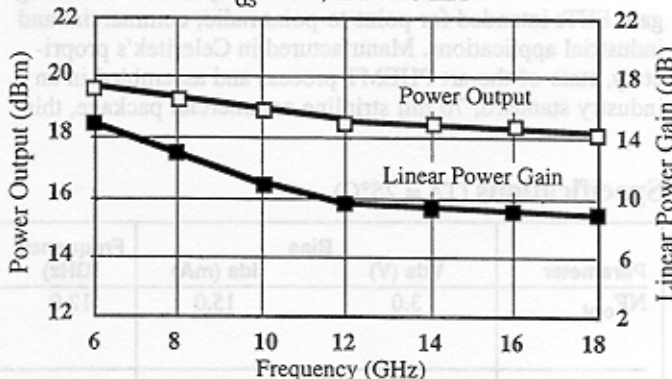
Typical Noise Parameters (Vds = 3V, Ids = 15 mA)

Freq (GHz)	NF _{opt}	G _a (dB)	Gamma Opt Mag	Ang	Rn/50
2.0	0.45	21.9	0.83	27	0.52
4.0	0.48	17.8	0.70	55	0.36
6.0	0.54	14.8	0.60	78	0.23
8.0	0.63	12.7	0.52	99	0.15
10.0	0.75	11.2	0.47	120	0.11
12.0	0.90	10.3	0.44	142	0.09
14.0	1.09	9.8	0.41	168	0.11
16.0	1.31	9.4	0.40	-160	0.15
18.0	1.56	9.2	0.39	-120	0.21

Typical Performance (TA = 25°C)

Noise Figure and Associated Gain vs Frequency
 $V_{ds} = 3V$, $I_{ds} = 15\text{ mA}$ Noise Figure and Associated Gain vs I_{ds}
 $V_{ds} = 3V$, Frequency = 12 GHz S_{21} and MSG vs Frequency $V_{ds} = 3V$, $I_{ds} = 15\text{ mA}$ 

Power Output and Linear Power Gain vs Frequency

 $V_{ds} = 6V$, $I_{ds} = 40\text{ mA}$ Typical Scattering Parameters (TA = 25°C, $V_{ds} = 3V$, $I_{ds} = 15\text{ mA}$)

CFB0103

Frequency (GHz)	S_{11}		S_{21}		S_{12}		S_{22}		MSG
	(Mag)	(Ang)	(dB)	(Mag)	(dB)	(Mag)	(Mag)	(Ang)	(dB)
2.0	0.97	-27	13.9	4.95	-30.3	0.03	0.54	-19	22.1
4.0	0.86	-63	12.5	4.22	-24.6	0.06	0.52	-45	18.6
6.0	0.75	-90	11.3	3.67	-22.1	0.08	0.49	-64	16.7
8.0	0.60	-103	11.0	3.55	-20.1	0.10	0.40	-78	15.5
10.0	0.54	-165	9.8	3.09	-19.2	0.11	0.28	-116	14.5
12.0	0.49	170	8.9	2.79	-19.0	0.11	0.32	-130	14.0
14.0	0.51	128	8.2	2.57	-18.2	0.12	0.22	-157	13.2
16.0	0.58	110	7.3	2.32	-17.8	0.13	0.29	157	12.6
18.0	0.58	85	7.0	2.24	-17.0	0.14	0.34	144	12.0

Celeritek reserves the right to make changes without further notice to any products herein. Celeritek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celeritek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celeritek does not convey any license under its patent rights nor the rights of others. Celeritek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celeritek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celeritek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celeritek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celeritek was negligent regarding the design or manufacture of the part. Celeritek is a registered trademark of Celeritek, Inc. Celeritek, Inc. is an Equal Opportunity/Affirmative Action Employer.