

Temperature Sensors Infrared TI-100-s/-c

www.bosch-motorsport.com



- ▶ Non-contact temperature measurement
- ▶ Measurement range: 0 to 1,000°C
- ▶ Analog output (0 to 5 V)
- ▶ Compact size and robust housing

This infrared temperature sensor is designed for non-contact surface temperature measurement of various parts (e.g. tires or cylinder heads) based on IR radiation.

Using ruggedized silicon-coated optics with internal electronics and cabling packaged inside stainless steel housing, this sensor measures the emitted infrared radiation of an object and calculates its temperature. The output signal has a linear characteristic (temperature vs. output voltage).

The main features of this sensor are its compact size, robust design, and high signal quality at a low cost. In addition, it offers the ability to change the temperature range, the output voltage and emissivity by request.

Application

Application	0 to 1,000°C
Operating temp. range (sensing head)	-20 to 120°C
Operating temp. range (electronics)	-20 to 70°C
Storage temperature range	-40 to 85°C

Relative humidity	10 to 95 %
Max. vibration any axis	30 m/s ² at 11 to 200 Hz 500 m/s ² , 11 ms shock

Technical Specifications

Variations

	TI-100-s	TI-100-C
Optimized for measuring of	Steel	Carbon
Emissivity (predefined)	0.80	0.75

Mechanical Data

Male thread	M12x1 mm
Wrench size	14 mm
Length housing	28 mm
Weight with wire 1 m	70 g

Electrical Data

Power supply U _s	5 to 28 V
Max power supply U _s	28 V

Full scale output UA	0 to 5 V
----------------------	----------

Current IS	9 mA
------------	------

Characteristic

Emissivity (predefined)	Please see Variations
-------------------------	-----------------------

Optical resolution	10 : 1
--------------------	--------

Spectral range	8 to 14 μm
----------------	-----------------------

Compensated range	-20 to 120°C
-------------------	--------------

Temperature resolution at $T_{\text{obj}} < 100^\circ\text{C}$	0.1°C
--	-------

System accuracy at 23°C t_{amb} or max. value	$\pm 1.5^\circ\text{C}$ or 1.5 %
--	----------------------------------

Repeatability at 23°C t_{amb} or max. value	$\pm 0.75^\circ\text{C}$ or 0.75 %
--	------------------------------------

Sensitivity	31.25 mV/°C
-------------	-------------

Offset	0 mV
--------	------

Connectors and Wires

Connector	ASL 6-06-05PN-HE
-----------	------------------

Mating connector ASL 0-06-05SN-HE	F 02U 000 231-01
--------------------------------------	------------------

Pin 1	U_s
-------	-------

Pin 2	Gnd
-------	-----

Pin 3	Sig
-------	-----

Pin 4	Prg
-------	-----

Pin 5	Scr
-------	-----

Various motorsport and automotive connectors are available on request.

Sleeve	Viton
--------	-------

Wire size	AWG 26
-----------	--------

Wire length L	70 to 100 cm
---------------	--------------

Please specify the requested wire length with your order.

Installation Notes

The TI-100 can be connected directly to most control units and data logging systems.

The temperature measurement range can be changed anywhere in the range of -20°C to 1,000°C per request.

The emissivity can be changed by request.

The predefined emissivity can differ from the real emissivity.

To determine the emissivity, please contact Bosch Motorsport for assistance.

The sensor is protected against reverse polarity and short-circuits.

Sensor can be mounted in any orientation.

Do not disconnect the electronics housing from the sensor.

The sensor meets the EMV qualification 89/336/EWG.

Please avoid abrupt temperature changes.

For mounting please use only the integrated thread.

Please ensure that the environmental conditions do not exceed the sensor specifications.

To clean the lens, use only a soft, wet (water or water based glass cleaner) cloth -> NO DISSOLVER cleaner!

Please find further application hints in the offer drawing at our homepage.

Safety Note

The Sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Ordering Information


Temperature Sensors Infrared TI-100-s

Order number **F 01T A21 210-02**


Temperature Sensors Infrared TI-100-c

Order number **F 01T A21 211-02**

Dimensions

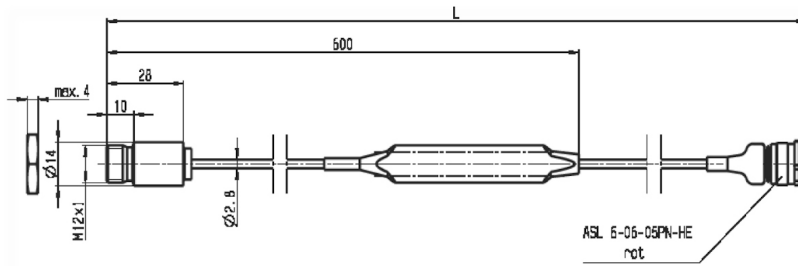

Optical chart

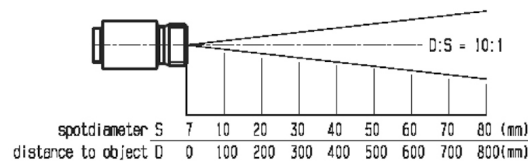

Represented by:

Europe:
 Bosch Engineering GmbH
 Motorsport
 Robert-Bosch-Allee 1
 74232 Abstatt
 Germany
 Tel.: +49 7062 911 9101
 Fax: +49 7062 911 79104
 motorsport@bosch.com
 www.bosch-motorsport.de

North America:
 Bosch Engineering North America
 Motorsport
 38000 Hills Tech Drive
 Farmington Hills, MI 48331-3417
 United States of America
 Tel.: +1 248 876 2977
 Fax: +1 248 876 7373
 motorsport@bosch.com
 www.bosch-motorsport.com

Latin America:
 Robert Bosch Ltda
 Motorsport
 Av Juscelino Kubitscheck de
 Oliveira 11800
 Zip code 81460-900
 Curitiba - Parana
 Brasilia
 Tel.: +55 41 3341 2057
 Fax: +55 41 3341 2779

Asia-Pacific:
 Bosch Engineering Japan K.K.
 Motorsport
 18F Queen's Tower C, 2-3-5 Minato Mirai
 Nishi-ku, Yokohama-shi
 Kanagawa 220-6218
 Japan
 Tel.: +81 45 650 5610
 Fax: +81 45 650 5611
 www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
 Robert Bosch Pty. Ltd
 Motorsport
 1555 Centre Road
 Clayton, Victoria, 3168
 Australia
 Tel.: +61 (3) 9541 3901
 motor.sport@au.bosch.com