



# Series 800 Vertisockets™ Horizontal Mounting with Collet Contacts

## FEATURES:

- Aries offers a full line of Vertisockets™ for DIP packaging of LEDs, incandescent lamps, DIP switches, test points, etc. The variations of mounting positions provide exceptional design freedom.
- Accepts standard LEDs and incandescent displays as well as .500 [21.70] and .600 [15.24] high large displays.

## SPECIFICATIONS:

- Standard body material is black, UL 94-HB Glass-filled Nylon.
- High temp body is black, UL 94V-0 4/6 Nylon.
- Spacer is fishpaper (sockets with "X"=.300 [7.62] only).
- Pin body is Brass Alloy 360 1/2 hard per UNS C36000 ASTM-B16-85.
- Pin body plating is 200µ [5.07 µm] min. 93/7 Tin/Lead per MIL-P-81728 over 100µ [2.54 µm] min. Nickel per QQ-N-290.
- 4-fingered collet contact is Beryllium Copper Alloy per UNS C17200 ASTM-B194-92.
- Contact plating is 30µ [7.6 µm] min. Gold per MIL-G-45204 over 50µ [1.27 µm] min. Nickel per QQ-N-290.
- Accepts leads .015-.025 [.38-.64] in diameter, .110-.150 [2.79-3.81] in length.
- Contact current rating=3 Amps.
- Operating temperature=221°F [105°C].
- Insertion Force=180 grams/pin; Withdrawal Force=90 grams/pin; Normal Force=140 grams/pin; (based on a .018 [.46] diameter test lead).


## MOUNTING CONSIDERATIONS:

- Suggested PCB Hole Size=.035 ± .002 [.89 ± .05] dia.

## ALL DIMENSIONS: INCHES [MILLIMETERS]


All tolerances ± .005 [.13] unless otherwise specified

"A"=NO. OF PINS PER ROW X .100 [2.54]  
"B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]

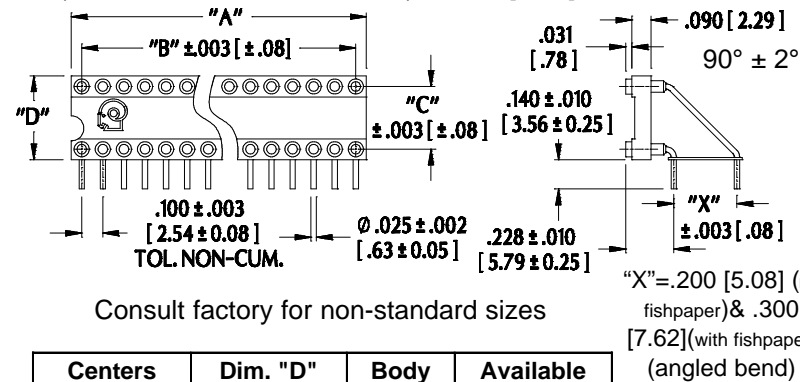


Consult factory for non-standard sizes

Centers "C"	Dim. "D"	Body Style	Available Sizes
.200 [5.08]	.300 [7.62]	A	6 thru 10
.300 [7.62]	.400 [10.16]	C	6 thru 20
.400 [10.16]	.500 [12.70]	B	22 thru 40
.600 [15.24]	.700 [17.78]	C	6 thru 22
		B	42 thru 48

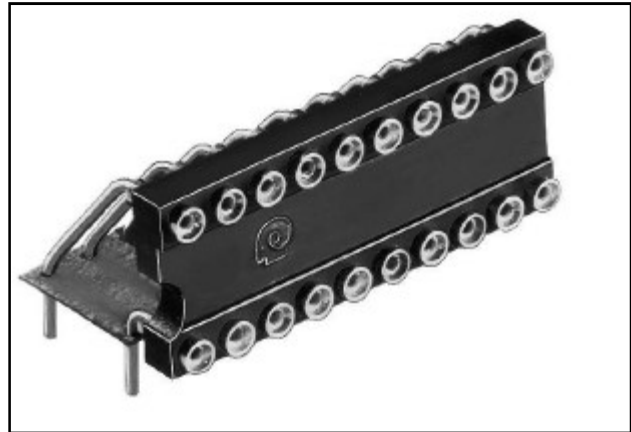


Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

## ORDERING INFORMATION


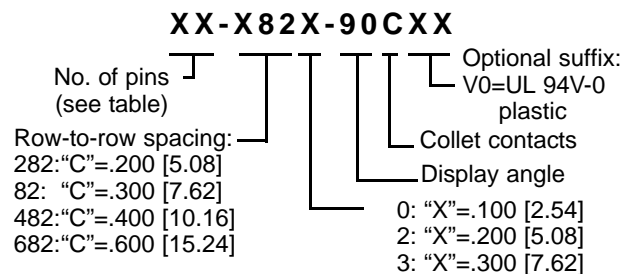


Consult Data Sheet No. 13004 for Vertical Mounting Vertisockets™.



Consult factory for other display angles

## CONTACT DETAIL

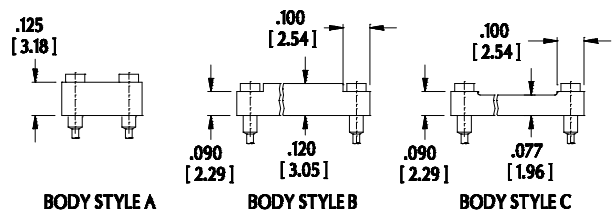

**ARIES**  
ELECTRONICS, INC.  
http://www.arieselec.com • info@arieselec.com

NORTH AMERICA  
Frenchtown, NJ USA  
TEL: (908) 996-6841  
FAX: (908) 996-3891



EUROPE  
TEL: +44 870 240 0249  
FAX: +44 871 919 6033  
europe@arieselec.com

13005  
REV.E