


STLZ950/..F-5.08-V-GREEN-HC



Technical Data

Wire Sizes		Insulating Material	
Solid min	-	Material	PA 6.6
solid max	-	Flammability Class	UL 94 V-0
Stranded (flexible)		Temperatures	
min	-	Operating Temperature	-30 °C - 105 °C
Stranded (flexible) max		Wave Soldering Process	
min	-	Soldering Temperature, recommended	265 °C
Stranded with Ferrule min		Peak Soldering Time, recommended	3-4 s
Stranded with Ferrule max		Reflow Process	
Soldering Temperature, recommended		-	
Peak Soldering Time, recommended		-	
Dimensions		Soldering Temperature, recommended	
Stripped Length		-	
PCB Hole Diameter		1.4 mm	
Materials		Peak Soldering Time, recommended	
Flansch	Brass	-	
Gewindeinsatz		-	
Contact Pin	Copper Alloy	-	


Colours

GREEN	RAL6018	
LIGHT GREEN	similar RAL 6018	

Colours according to RAL, there may be variations on colour due to production conditions. Special colours on request.

Counterparts (Spacing 5.08 mm)

Pin Strip/Terminal Blocks	
AKZ950	

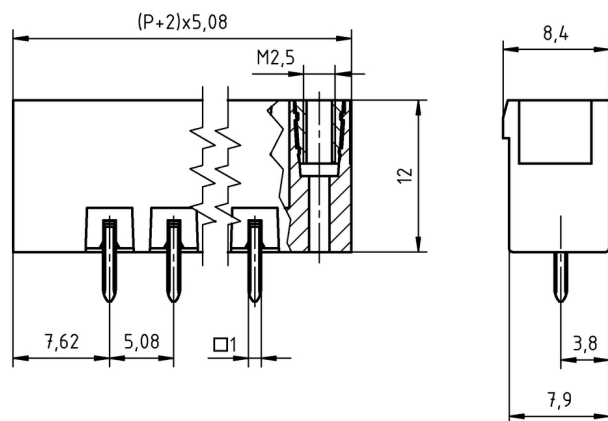

Order Data (Spacing mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	20.32	STLZ950/2F-5.08-V-GREEN-HC	50950026129E	100
3	25.40	STLZ950/3F-5.08-V-GREEN-HC	50950036129E	100
4	30.48	STLZ950/4F-5.08-V-GREEN-HC	50950046129D	50
5	35.56	STLZ950/5F-5.08-V-GREEN-HC	50950056129D	50
6	40.64	STLZ950/6F-5.08-V-GREEN-HC	50950066129D	50
7	45.72	STLZ950/7F-5.08-V-GREEN-HC	50950076129D	50
8	50.80	STLZ950/8F-5.08-V-GREEN-HC	50950086129D	50
9	55.88	STLZ950/9F-5.08-V-GREEN-HC	50950096129D	50
10	60.96	STLZ950/10F-5.08-V-GREEN-HC	50950106129D	50
11	66.04	STLZ950/11F-5.08-V-GREEN-HC	50950116129D	50
12	71.12	STLZ950/12F-5.08-V-GREEN-HC	50950126129D	50

Accessories

Figure	Designation	Article Number
	Coding star CS2-5.0/5.08-RED	50000000024
	Dividing element SE-STL950-GREEN	50950000002

Ratings



Usegroup	B	C	D	
Rated Voltage	300 V	150 V	300 V	250 V
Rated Current	16 A	16 A	10 A	16 A
Overtoltage Category				III
Test Voltage	1.6 kV	1.6 kV	1.6 kV	4.0 kV
Pollution Degree				3