


# PRODUCT INFORMATION

1320nm  
**1A284**  
 High-Performance LED

Baseband Video

The low thermal droop of this device allows baseband video transmission with minimum distortion. The double-lens optical system provides for optimum coupling of power into the fiber.

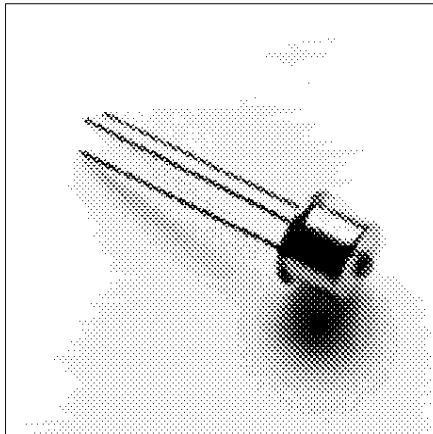


## Optical and Electrical Characteristics (25°C Case Temperature)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Fiber-Coupled Power (Fig. 1, 2, & 3) (Table 1)	$P_{\text{fiber}}$	35	50		$\mu\text{W}$	$I_F = 100\text{mA}$ (Note 1)
Rise and Fall Time (10-90%)	$t_r, t_f$		6	9	ns	$I_F = 100\text{mA}$ (no bias)
Bandwidth (3dB <sub>e1</sub> )	$f_c$		55		MHz	$I_F = 100\text{mA}$
Thermal Droop (nonlinearity) (Note 2)	$ \Delta P $		2		%	$I_F = 100\text{mA}$
Peak Wavelength	$\lambda_p$	1280	1320	1350	nm	$I_F = 100\text{mA}$
Spectral Width (FWHM)	$\Delta\lambda$		120	155	nm	$I_F = 100\text{mA}$
Forward Voltage (Fig. 5)	$V_F$		1.5	2	V	$I_F = 100\text{mA}$
Reverse Current	$I_R$			100	$\mu\text{A}$	$V_R = 1\text{V}$
Capacitance	$C$		200		pF	$V_R = 0\text{V}, f = 1\text{MHz}$

Fiber:  
 62.5/125  $\mu\text{m}$   
 Graded  
 Index  
 NA=0.275

**Note 1:** Measured at the exit of 100 meters of fiber.

**Note 2:** Transient decline in optical power due to self-heating.

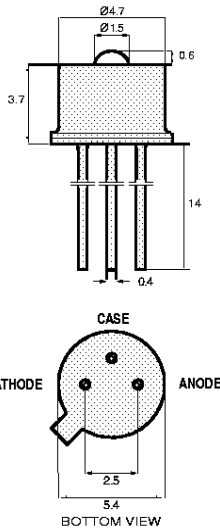

All dimensions in mm

The anode is in electrical contact with the case.

**TO-46 Package With Lens**

## Absolute Maximum Ratings

PARAMETER	SYMBOL	LIMIT
Storage Temperature	$T_{\text{stg}}$	-55 to +125°C
Operating Temperature (derating: Fig. 4)	$T_{\text{op}}$	-55 to +125°C
Electrical Power Dissipation (derating: Fig. 4)	$P_{\text{tot}}$	230 mW
Continuous Forward Current ( $f \leq 10\text{kHz}$ )	$I_F$	110 mA
Peak Forward Current (duty cycle $\leq 50\%$ , $f \geq 1\text{MHz}$ )	$I_{\text{FRM}}$	170 mA
Reverse Voltage	$V_R$	1.5 V
Soldering Temperature (2mm from the case for 10 sec)	$T_{\text{sld}}$	260°C

## Thermal Characteristics

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Thermal Resistance - Infinite Heat Sink	$R_{\text{thjc}}$			100	°C/W
Thermal Resistance - No Heat Sink	$R_{\text{thja}}$			400	°C/W
Temperature Coefficient - Optical Power	$dP/dT_j$		-0.8		%/°C
Temperature Coefficient - Wavelength	$d\lambda/dT_j$		0.55		nm/°C

12270.11 1997-07-08



Europe: Tel (46) 8 58 02 45 00 Fax (46) 8 58 02 01 10  
 Tel (44) 1291 436180 Fax (44) 1291 436771

America: Tel 1-800-96MITEL Fax (613) 592-6909  
 Asia: Tel (65) 293 5312 Fax (65) 293 8527

**1A284**  
High-Performance LED 1320nm

Typical Fiber-Coupled Power		
Core Diameter/Cladding Diameter Numerical Aperture		
50/125 $\mu\text{m}$ 0.20	62.5/125 $\mu\text{m}$ 0.275	100/140 $\mu\text{m}$ 0.29
12 $\mu\text{W}$	50 $\mu\text{W}$	90 $\mu\text{W}$

Table 1

