
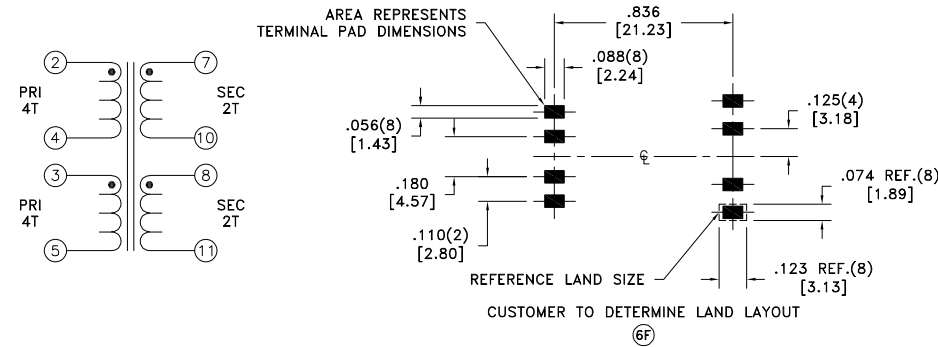


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

more than you expect

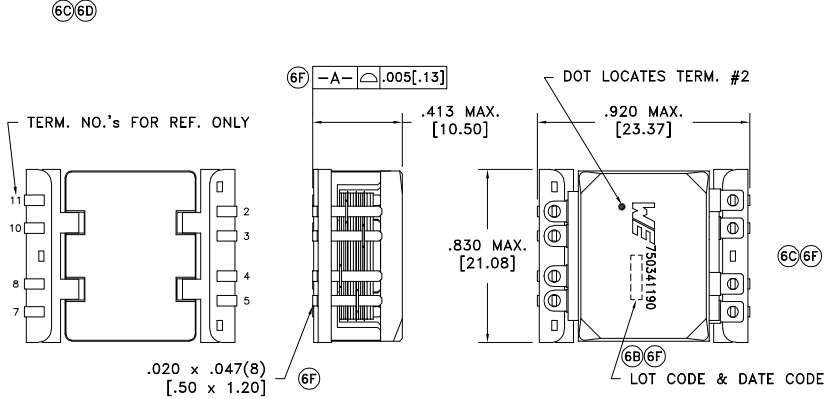

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6F D.C. RESISTANCE	2-4 @20°C	6.5 mOhms max.
6F D.C. RESISTANCE	3-5 @20°C	6.5 mOhms max.
6F D.C. RESISTANCE	7-10 @20°C	3.5 mOhms max.
6F D.C. RESISTANCE	8-11 @20°C	3.5 mOhms max.
INDUCTANCE	2-5 tie(3+4), 10kHz, 1.0VAC, Ls	153.0uH min.
6F LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+8+10+11), 100kHz, 100mVAC, Ls	0.500uH max.
6C DIELECTRIC	2-7 tie(3+4, 8+10), 2250VDC, 1 second	-
6F TURNS RATIO	(2-4):(3-5)	1:1
6F TURNS RATIO	(2-4):(7-10)	2:1
6F TURNS RATIO	(2-4):(8-11)	2:1

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

6E VOLTAGE-TIME: 120VuS

REV.	DATE	Packaging Specifications
6F	3/23	Method: Tape & Reel
6E	2/22	PKG-0871
6D	4/20	www.we-online.com/midcom
6C	5/14	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER
 eiSos p/n: 750341190



PART NO.
750341190
 SPECIFICATION SHEET 1 OF 1