

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2001

© COPYRIGHT 2001

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

D1 EG00-2695-01

29OCT01

JJ

D2 EG00-3647-01

10DEC01

JJ

D3 EG00-0279-02

25JAN02




JJ

E EGA0-0916-04

20APR04

PK


WS

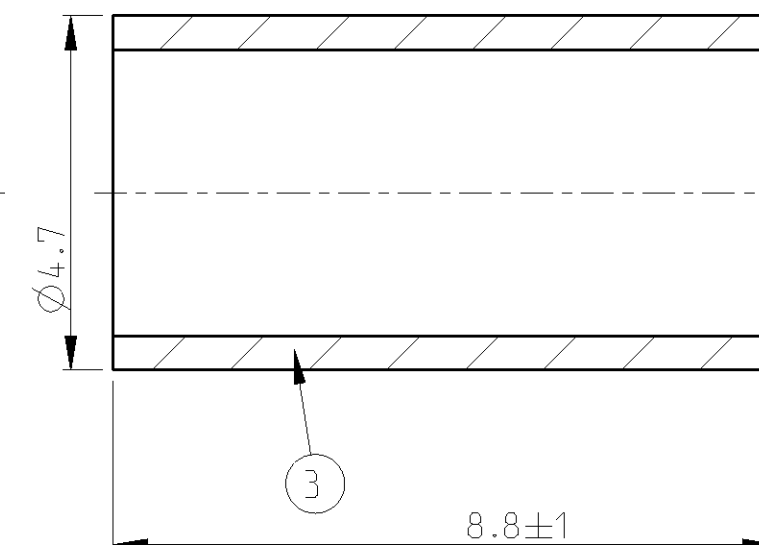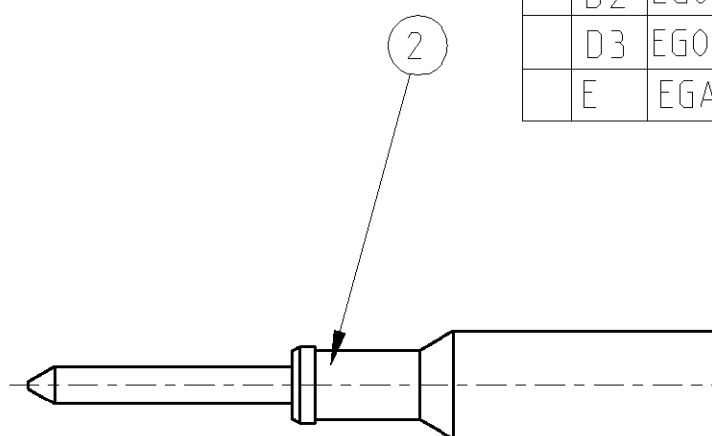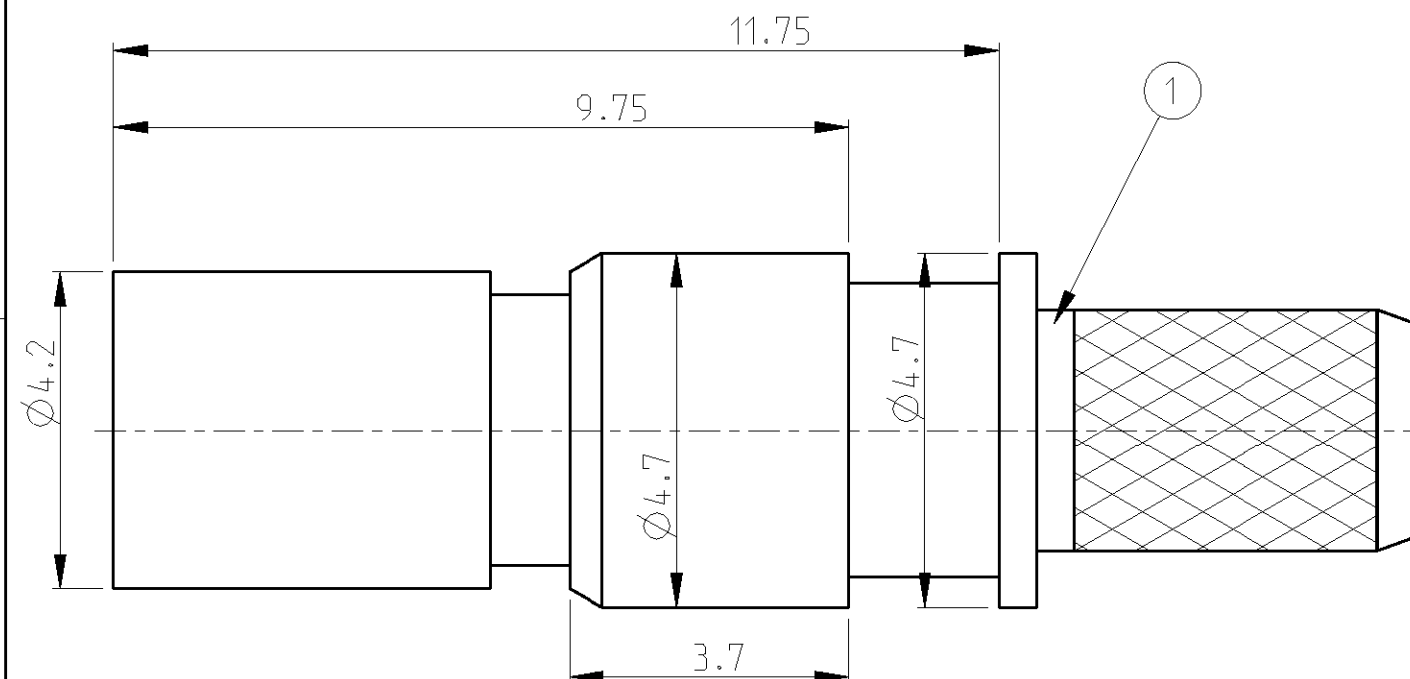

1 Ni PLATING 1.0 µm MIN. - 5.0 µm MAX. THX.

2 PLATING: 0.1 - 1.0 µm Au
OVER 0.1 - 9.0 µm Ni3 500 OUTER SHELL ASSIES (POS.1) PACKED WITH 500
CENTER CONTACTS (POS.2) AND 500 FERRULES
(POS.3) EACH SEPARATELY IN A PLASTIC BAG,
1 BAG PER POS. PACKED IN A CARDBOARD BOX.4 HAND CRIMPING TOOL FOR FERRULE (POS.3)
AMP PN 539635-1,
ADAPTER AMP PN 539775-2 (HEX.4.1)5 HAND CRIMPING TOOL FOR CENTER
CONTACT (POS.2) PN 601966-1, POSITION 4,
ADAPTER AMP PN 957099-1.

1 VERNICKELT 1,0 µm MIN. - 5,0 µm MAX. DICKE

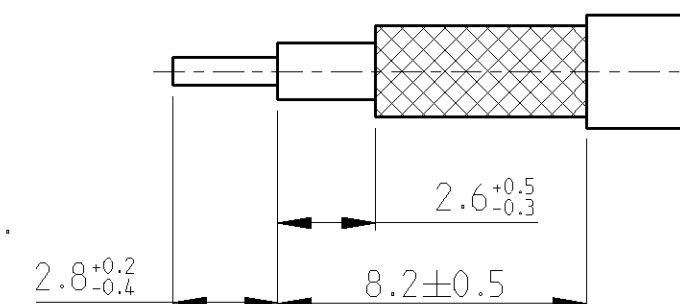
2 VERGOLDET 0,1 - 1,0 µm Au
UEBER 0,1 - 9,0 µm Ni3 500 OUTER-SHELL-ASSIES (POS.1) MIT 500 INNENLEITERN (POS.2)
UND 500 CRIMPHUELSEN (POS.3) JEWEILS SEPARAT IN
PLASTIKBEUTELN VERPACKT, 1 BEUTEL PRO
POS. IN EINEM KARTON VERPACKT.4 HANDCRIMPWERKZEUG FUER CRIMPHUELSE (POS.3)
AMP PN 539635-1,
ADAPTER AMP PN 539775-2 (HEX.4.1).5 HANDCRIMPWERKZEUG FUER INNENLEITER (POS.2)
PN 601966-1, POSITION 4, ADAPTER AMP PN 957099-1.STRIPPING DIMENSIONS (UNSCALED)
ABISOLIERMASSE (NICHT MASSTAEBLICH)

5-619056-1	3	FERRULE CRIMPHUELSE	SfCu	1
	2	CENTER CONTACT INNENLEITER	CuZn36Pb1.5	2
	1	OUTER SHELL ASSY AUSSEN KONTAKT	CuZn39Pb3 PE	1
PART-NO	ITEM NO.	DESCRIPTION	MATERIAL	PLATING

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm



MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±0.2
1 PLC ±0.2
2 PLC ±0.2
3 PLC ±
4 PLC ±
ANGLES ±2°

FINISH

-

DWN 16MAY01

J. Jauris

CHK 29OCT01

O. De Cloet

APVD 29OCT01

H. Wendling

PRODUCT SPEC

-

APPLICATION SPEC

114-71004

WEIGHT

-

CUSTOMER DRAWING

tyco
Electronics

tyco Electronics AMP GmbH

D - 64625 Bensheim

NAME
COAXICON.CONNECTION FOR RF,
GSM AND GPS
JACK FOR LOW LOSS CABLESIZE
A3CAGE CODE
00779DRAWING NO
C=619056RESTRICTED TO
-SCALE
10:1SHEET
1 OF 2REV
E

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2000

© COPYRIGHT 2000

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD


A1

-

SEE SHEET 1

CONTROL DIMENSIONS AFTER ASSEMBLY

KONTROLLMASSE NACH MONTAGE

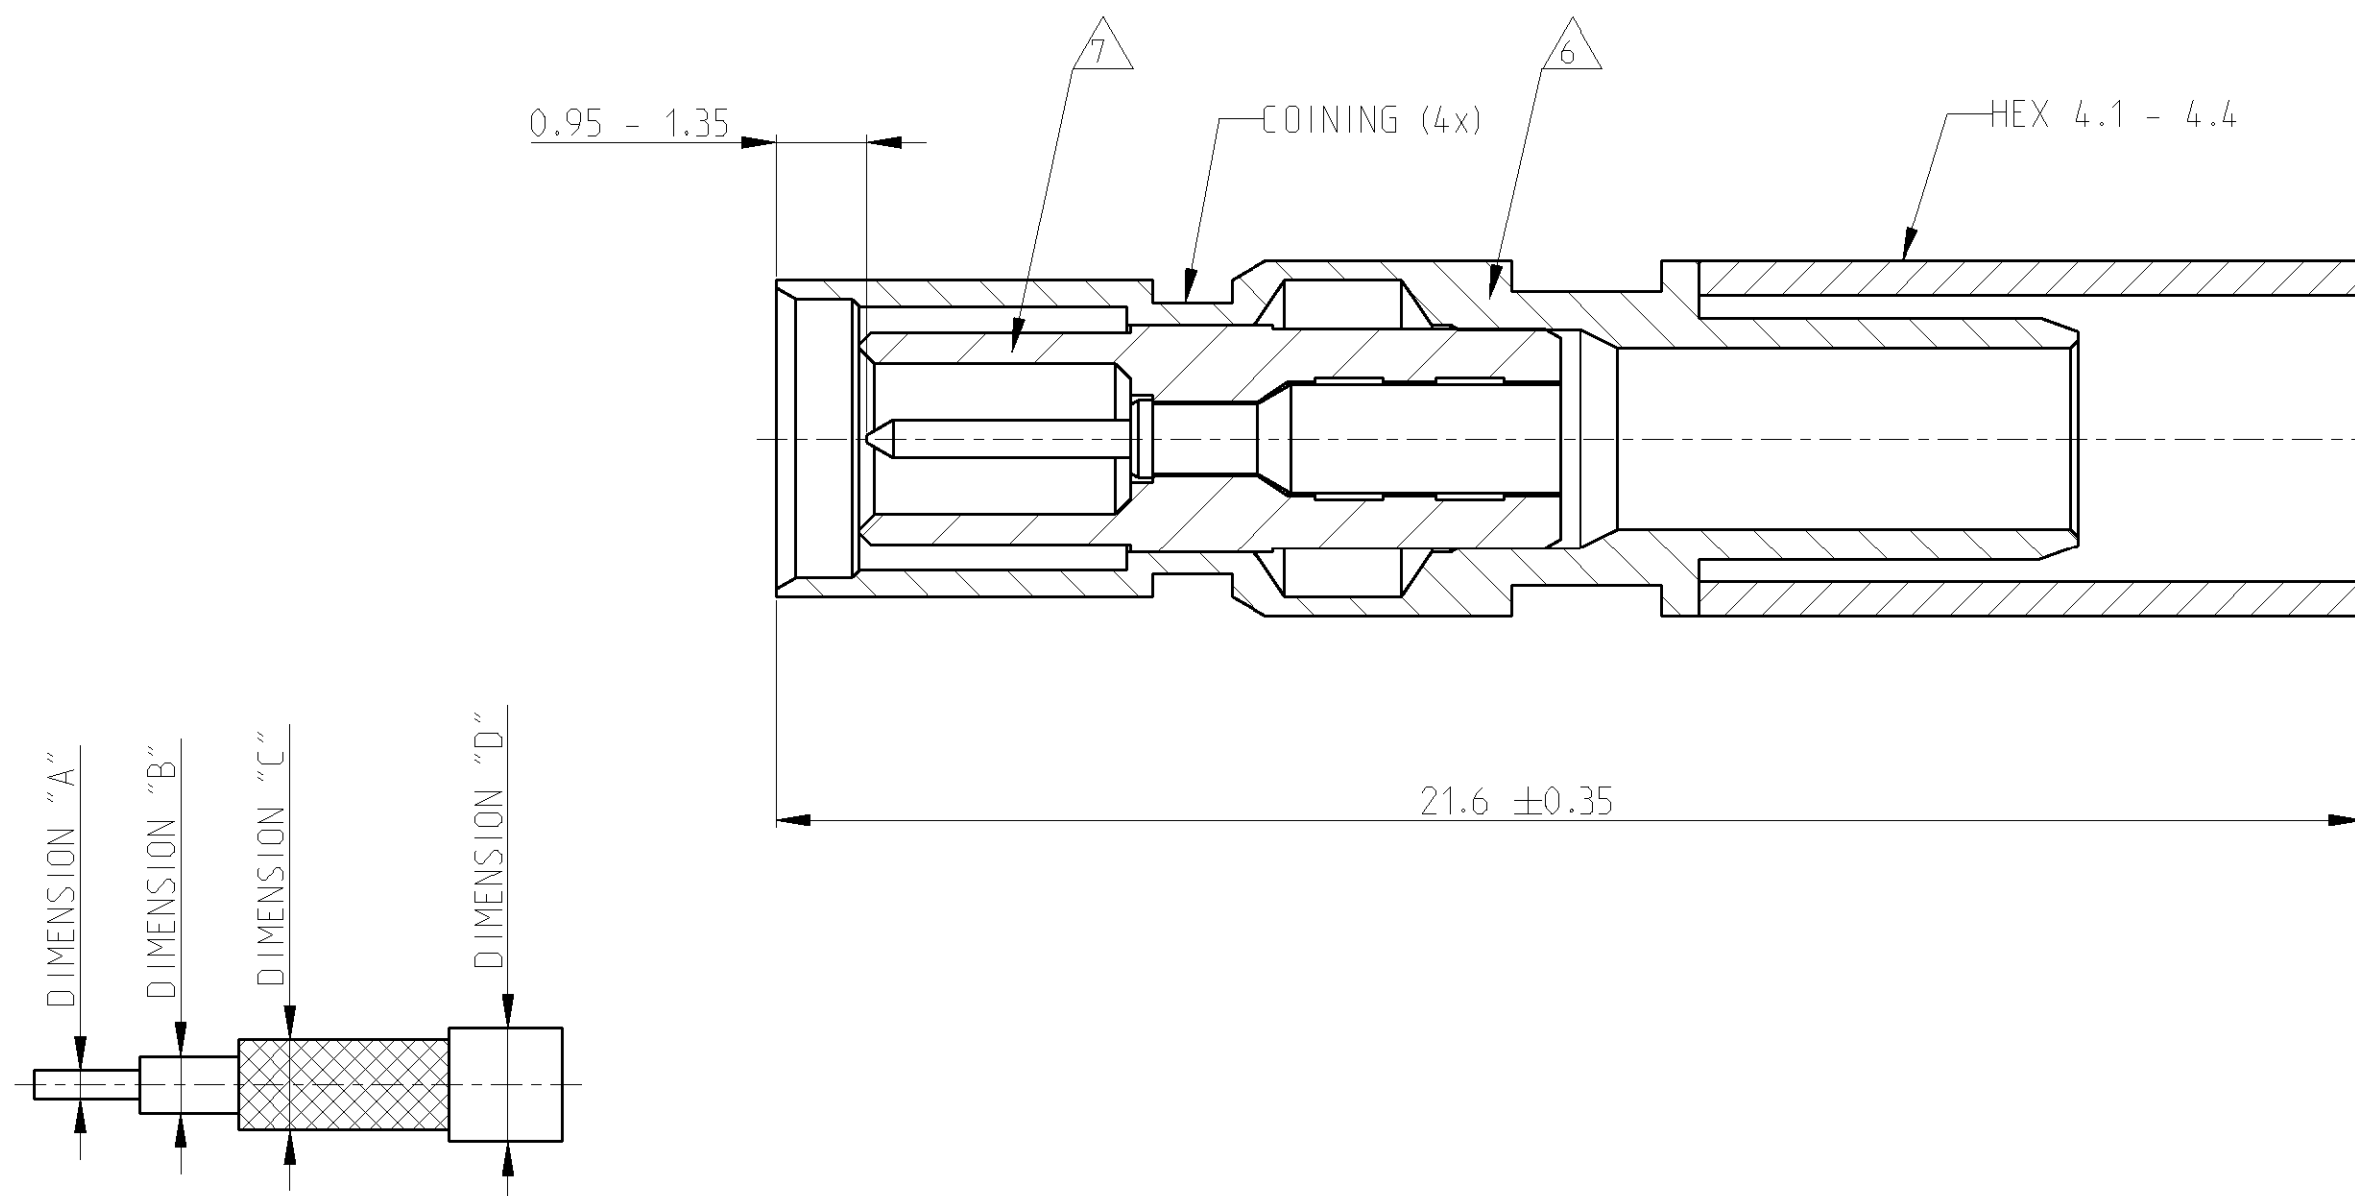


CABLE THAT SUITS TO THIS PN:

A: BRAID CABLE $\varnothing 0.9 \pm 0.05$ B: $\varnothing 2.25 \pm 0.05$ C: $\varnothing 2.90 \pm 0.1$ D: $\varnothing 3.5 \pm 0.15$ THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± 0.2
1 PLC ± 0.2
2 PLC ± 0.2
3 PLC $\pm$
4 PLC $\pm$
ANGLES $\pm 2^\circ$

MATERIAL

-

FINISH

-

DWN

J. Jauris

30MAY01

CHK

O. De Cloet

29OCT01

APVD

H. Wendling

29OCT01

PRODUCT SPEC

APPLICATION SPEC

114-71004

WEIGHT

-

CUSTOMER DRAWING

tyco
Electronics

tyco Electronics AMP GmbH

D - 64625 Bensheim

NAME

COAXICON, CONNECTION FOR RF,
GSM AND GPS
JACK FOR LOW LOSS CABLE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=619056

-

SCALE 10:1

SHEET 2 OF 2

REV E