
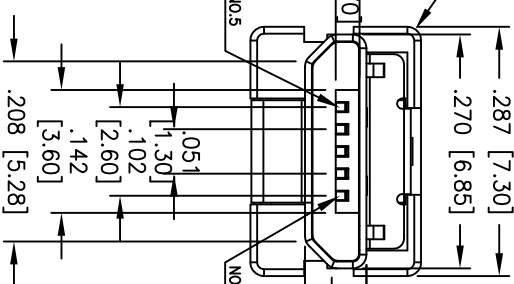
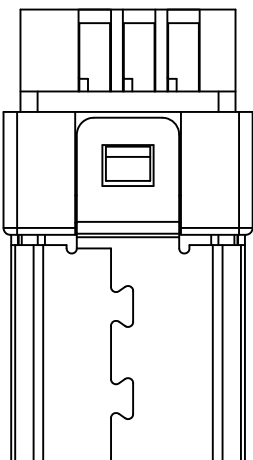
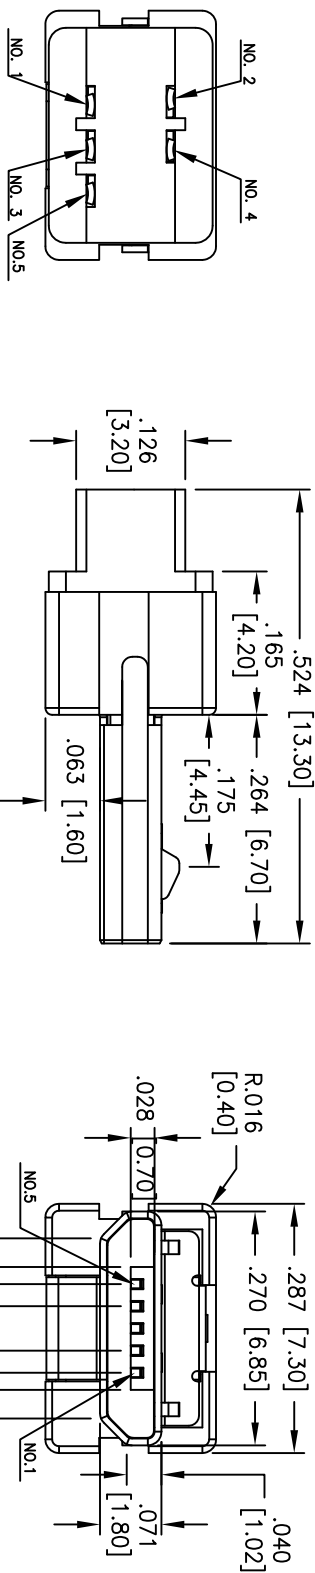


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/09	

APPROVED: _____

DATE: _____ TITLE: _____

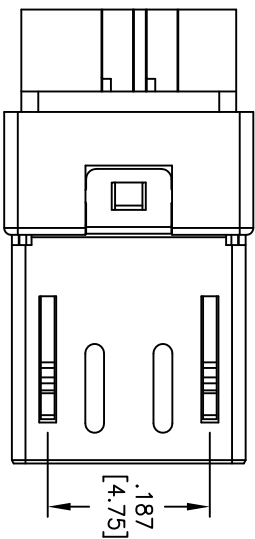

SPECIFICATIONS:

Material:

Insulator: LCP, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: PBS

Shell: Stainless, Nickel plated

Plating:

30u" Gold over Nickel underplate overall

Electrical:

Current rating: 1 Amp max.

Contact resistance: 30 mohms max.

Insulation resistance: 100 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 100 VAC for 1 minute

Temperature Rating:

Operating temperature: -30°C to +80°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES ± .10
Holes ± .015
XX ± .020
XXX ± .015
XXX ± .010

APPROVALS
DATE

DRAWN DY 6/08/09

CHECKED

APPROVED

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MICRO USB B TYPE PLUG

TITLE

SIZE

PART NO.

REV.

REF.

SCALE

SHEET 1 OF 1