


ZONE	REV	DESCRIPTION	DATE	BY
-	A	ECCO 15706	05.28.03	AGS

P/N	APPLICABLE NOTE(S)	"A" CABLE TYPE
-1CC	1,2,3	Ø .141 SEMI-RIGID CABLE
-1CCSF	1,2,3	Ø .141 SEMI-RIGID CABLE
-2CC	1,2,3	Ø .085 SEMI-RIGID CABLE
-2CCSF	1,2,3	Ø .085 SEMI-RIGID CABLE
-3CC	1,2,3	Ø .141 LOW LOSS CABLE
-3CCSF	1,2,3	Ø .141 LOW LOSS CABLE
-4CC	1,2,3	Ø .116 LOW LOSS CABLE
-4CCSF	1,2,3	Ø .116 LOW LOSS CABLE

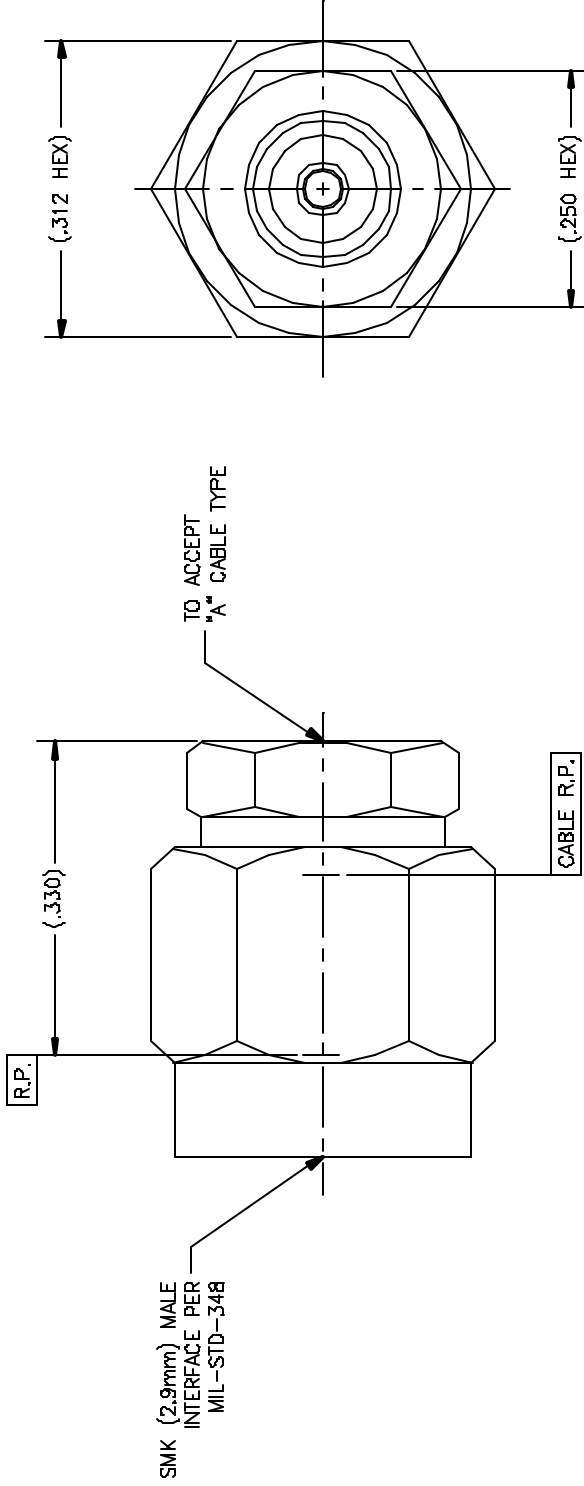

FORM NO. 250
REV. A

NOTES(S):

- MATERIAL(S):
 - BODY & COUPLING NUT: 303 SST PER ASTM A-582.
 - CENTER CONDUCTOR & RETAINING RING: BeCu ALLOY C173 PER ASTM B-196.
 - GASKET: SILICONE RUBBER PER ZZ-R-785, CLASS 2B.
 - BEAD: (HIGH PERFORMANCE APPLICATION)
- FINISH(ES):
 - COUPLING NUT: (CCSF's) PASSIVATED PER ASTM A-967, (CC's) GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - BODY & CENTER CONDUCTOR: GOLD PLATE PER ASTM B-488 OVER NICKEL PLATE PER AMS-QQ-N-290.
 - GASKET, RETAINING RING & BEAD: NONE
- CENTER CONDUCTOR & BEAD TO BE PACKAGED AND SHIPPED UNASSEMBLED.

APPLICABLE TENSQITE DOCUMENTS		TOLERANCES AND NOTES		SEE NOTE(S)	
WORK STD	FREQ. INT	ASSY. INT	EXCEPT AS NOTED	GENERAL	REVISION
NA	NA	NA	DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED RAUNDED ± 1/32 1. MACHINE FINISH 25 μ IN 2. MACHINED SURFACE ± .005 UNLESS SPECIFIC 3. HOLE FINISH ± .002 UNLESS SPECIFIC 4. HOLE PERFORMANCES, TABLES & INTERCONNECT SYSTEMS 5. DIMENSIONS TO BE MET EXCEPT PLATING 6. DIMENSIONS TO BE MET EXCEPT PLATING 7. DIMENSIONS TO BE MET EXCEPT PLATING 8. DIMENSIONS TO BE MET EXCEPT PLATING 9. DIMENSIONS TO BE MET EXCEPT PLATING 10. DIMENSIONS TO BE MET EXCEPT PLATING	SEE NOTE(S)	REVISION
				APPROVAL INITIALS	DATE
				DESIGNED BY	DATE
				ENGINEER	DATE
				DRAWN BY	DATE
				CHECKED BY	DATE
				APPROVED BY	DATE
				SCALE	SCALE
				SIZE	SIZE
				WORKING NO.	WORKING NO.
				SHEET 1	SHEET 1
				OF 1	OF 1
				REV. A	REV. A
				250	250

Tensolite

SMK (2.9mm) MALE STRAIGHT TO SEMI-RIGID CABLE (ANTI-TORQUE)

FORM NO. 250
REV. A