



DTSU-6 SERIES

6x6 Multiple Type

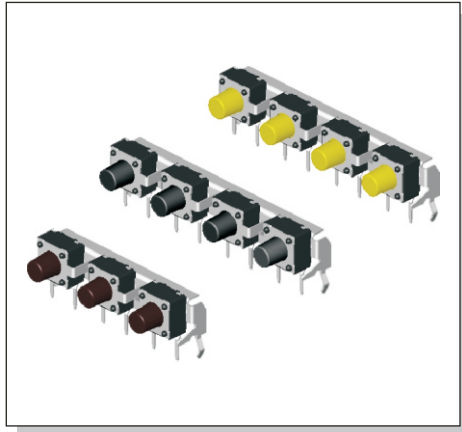

HOW TO ORDER

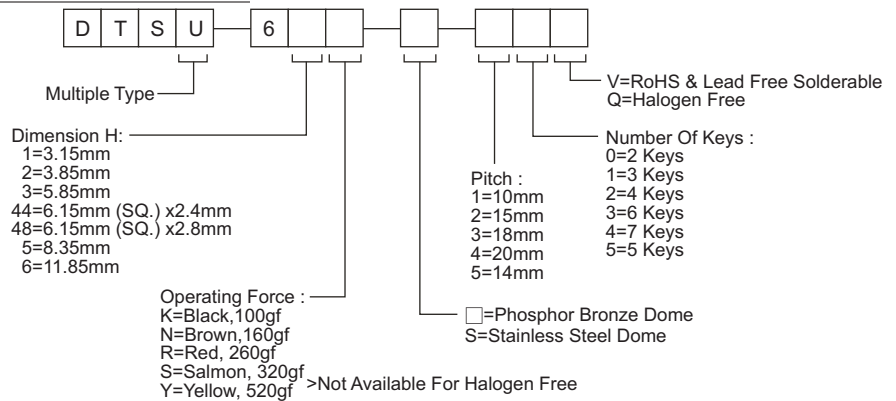

SPECIFICATION

MECHANICAL

Operation Force: 520±130gf Yellow (Y)
 320±80gf Salmon (S)
 260±50gf Red (R)
 160±50gf Brown (N)
 100±50gf Black (K)

Stroke : 0.25±0.2mm/0.1mm

ENVIRONMENTAL

Operation Temperature Range : -25°C to +70°C

Storage Temperature Range : -30°C to +80°C


ELECTRICAL

Electrical Life: *Phosphor Bronze Dome
 50,000 cycles for 320gf, 520gf
 100,000 cycles for 260gf
 200,000 cycles for 100gf, 160gf
 *Stainless Steel Dome
 300,000 cycles for 320gf, 520gf
 500,000 cycles for 260gf
 1,000,000 cycles for 100gf, 160gf
 Rating: 50mA, 12VDC


PACKAGE

DTSU-62-10: 190 pcs/set
 DTSU-62-11: 70 pcs/set
 DTSU-62-12: 56 pcs/set
 DTSU-62-13: 32 pcs/set
 DTSU-62-14: 57 pcs/set
 DTSU-62-15: 76 pcs/set
 DTSU-62-20: 90 pcs/set
 DTSU-62-21: 76 pcs/set
 DTSU-62-22: 57 pcs/set
 DTSU-62-23: 26 pcs/set
 DTSU-62-31: 76 pcs/set
 DTSU-62-32: 42 pcs/set
 DTSU-62-33: 38 pcs/set
 DTSU-62-42: 38 pcs/set
 DTSU-62-52: 40 pcs/set

CIRCUIT

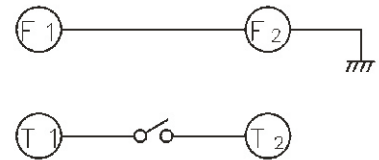

DTSU-6

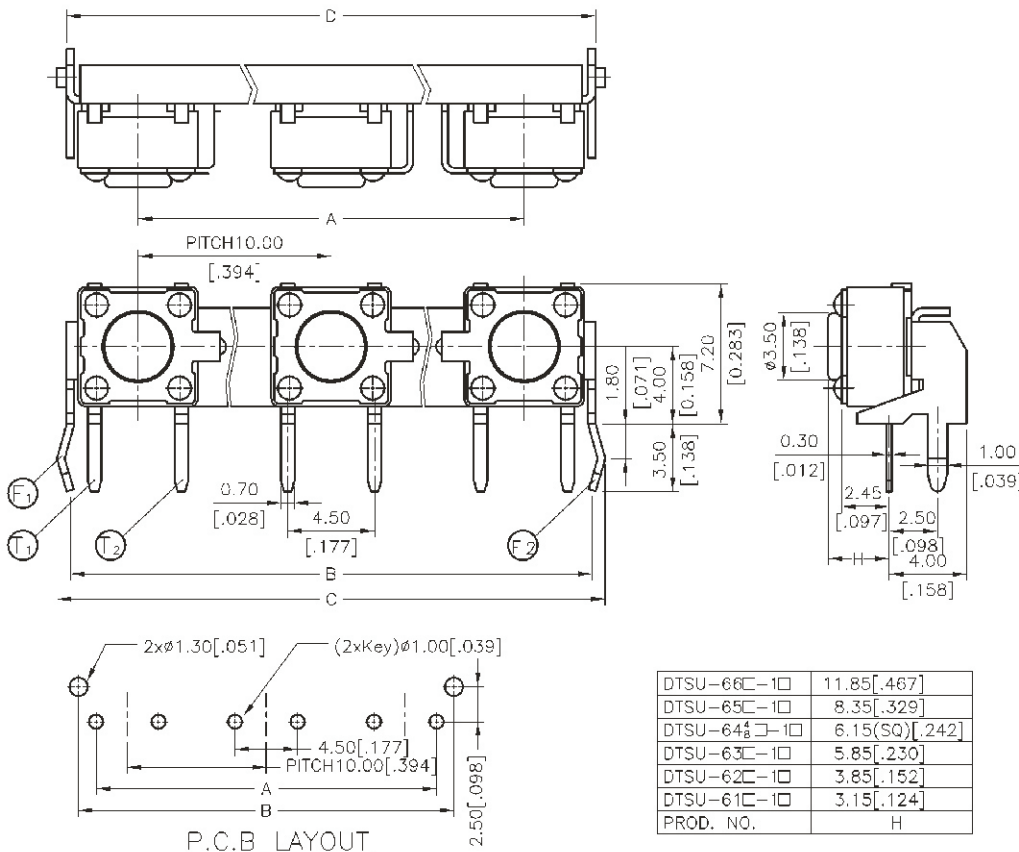

10	2	10	17	18.7	17.4
	3	20	27	28.7	27.4
	4	30	37	38.7	37.4
	5	40	47	48.7	47.4
	6	50	57	58.7	57.4
14	7	60	67	68.7	67.4
	2	14	22	23.5	22.4
	3	28	36	37.5	36.4
	4	42	50	51.5	50.4
	5	56	64	65.5	64.4
15	6	70	78	79.5	78.4
	7	84	92	93.5	92.4
	2	15	22	23.7	22.4
	3	30	37	38.7	37.4
	4	45	52	53.7	52.4
18	5	60	67	68.7	67.4
	6	75	82	83.7	82.4
	7	90	97	98.7	97.4
	2	18	25	26.7	25.4
	3	36	43	44.7	43.4
20	4	54	61	62.7	61.4
	5	72	79	80.7	79.4
	6	90	97	98.7	97.4
	7	108	115	116.7	115.4
	2	20	27	28.7	27.4
20	3	40	47	48.7	47.4
	4	60	67	68.7	67.4
	5	80	87	88.7	87.4
	6	100	107	108.7	107.4
	7	120	127	128.7	127.4
PITCH (mm)	Q'TY Of Keys	A DIM	B DIM	C DIM	D DIM