

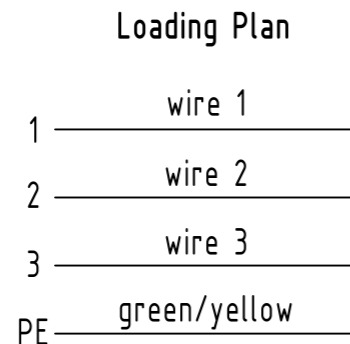
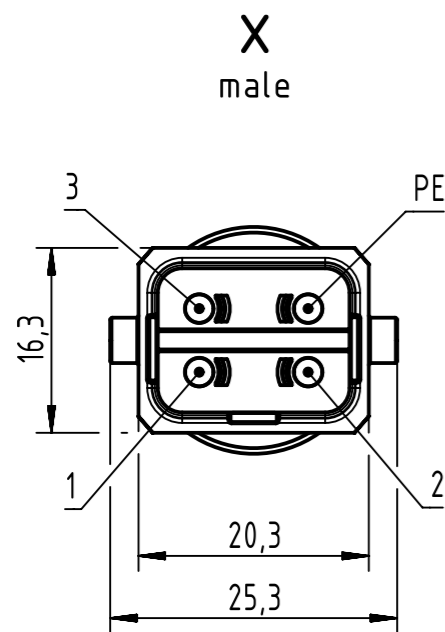


Connector Location A

Connector Location B

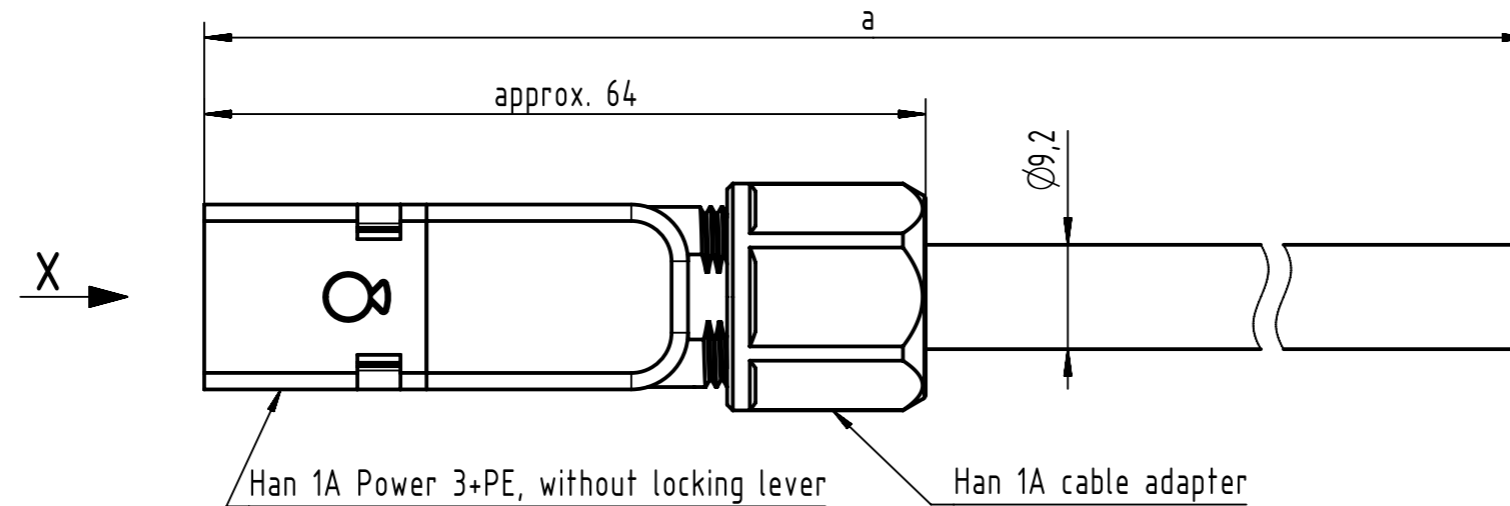

NOTE:
 * Silver plated contacts
 - Protection level: IP65
 - Temperature range: -30°C ... +80°C

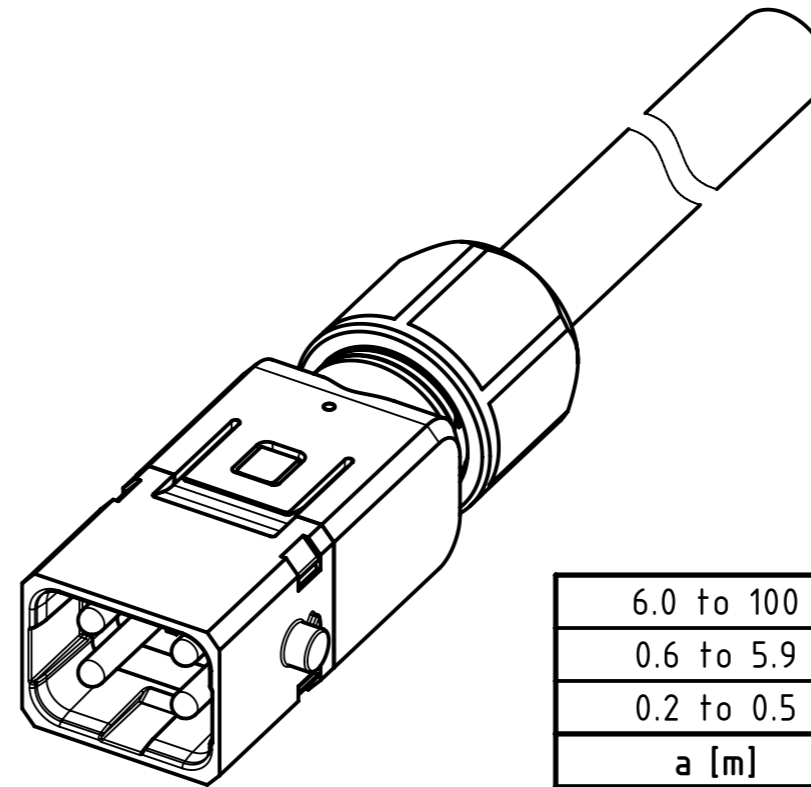

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
0.4	XXX=004	
0.3	XXX=003	
0.2	XXX=002	
Step	a [m]	XXX

JZ-500 4G2.5mm ² , PVC, grey	33500200201XXX
Type of cable	Part no.

	All rights reserved	Created by 402676	Inspected by COSTEA	Standardisation MUNTEANV	Date 2020-04-02	State Final Release	
	Department HCS - RO	Gross	Costea	Muntean			
HARTING Customised Solutions		Title Han1A CA 3+PE -lever m/- PVC				Doc-Key / ECM-Nr. 100838791/UGD/000/A 500000170249	
D-32339 Espelkamp		Type TB	Number 33500200201XXX			Rev. A	Page 1/1