


# MIL-55310/09-Series Specifications



**0.410D x 0.300H (in)**

PDI MIL-PRF-55310/09 Oscillators are available in both standard and custom frequencies to provide precision timing in a hermetically sealed package for military and space applications. PDI provides quick-turn sampling for your proto-typing needs, mass production capability, and competitive pricing.

ex) **M55310/09—B—01—A—7M000000**

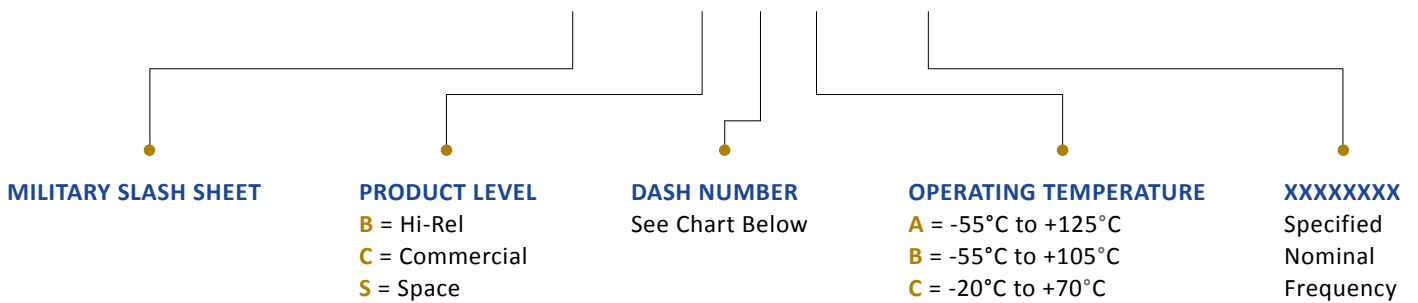

Dash No.	Frequency Range MHz	Supply Current mA Max.	Rise/Fall Times nS Max.	Duty Cycle @ 1.4 Vdc	Load TTL Max.	Tolerance @ 23°C ppm Max.	Aging Per Year ppm Max.	Operating Temperature		
								(A)	(B)	(C)
<b>01</b>	0.750000 – 9.000000	50	15	45 to 55%	10	±15	±5	±50	±40	±25
<b>05</b>						±25	±10	±100	±80	±50
<b>11</b>	9.000000 – 25.000000	30	15	40 to 60%	10	±15	±5	±50	±40	±25
<b>15</b>						±25	±10	±100	±80	±50
<b>21</b>	25.000000 – 60.000000	50	5	40 to 60%	6	±15	±5	±50	±40	±25
<b>25</b>						±25	±10	±100	±80	±50
<b>Aging Per Year (Max.)</b>							<b>5 ppm</b>		<b>10 ppm</b>	
Per 30 Days							±0.7 ppm		±1.5 ppm	
Per 90 Days							±1.5 ppm		±3.0 ppm	

**NOTES:**

All product supplied in anti-static packaging.  
 A TTL unit load is defined as: 1.60 mA sink, 0.04 mA source, and 2.00 pF capacitance.  
 At +70°C ± 2.0°C, intervals not more than every 72 hours for a minimum of 30 days.  
 The product described in this spec. consist of this specification and MIL-PRF-55310.  
*Decimal* XXX = ± .005, XX = ± .020 *Metric* [XXX = ± .13], [XX = ± .50]  
 Specifications subject to change without notice, last updated 4/1/13.

Parameter		Frequency Range		Units
		0.750000 to 60.000000 MHz		
Frequency Stability	vs Temperature (Max.)			ppm
	-20 to +70°C (Type C)	Per Chart		
	-55 to +105°C (Type B)	Per Chart		
	-55 to +125°C (Type A)	Per Chart		
	vs Supply Voltage (Max. for a 10% charge)	±2.0		
	vs Aging (@ +70°C ± 2.0°C) (Max.)	5 Per Year	10 Per Year	
	Per 30 Days	±0.7	±1.5	
	Per 90 Days	±1.5	±3.0	
Temperature Range	Operating	Per Chart		°C
	Storage	-62 to +125		
Supply Voltage	±10.0 %	+5.0		Vdc
Output		TTL		
Logic Levels	High (Min.)	2.4		Vdc
	Low (Max.)	0.5		

Test Inspection	Product Level S Method Condition	Product Level B & C Method Condition
Internal Visual	See 4.4.1	See 4.4.1
Stabization bake (prior to seal) 1/	MIL-STD-883, method 1011, Condition C (+150°C) 48 hours min.	MIL-STD-883, method 1011, Condition C (+150°C) 48 hours min.
Thermal Shock	MIL-STD-883, method 1011, Condition A	N/A
Temperature Cycling	MIL-STD-883, method 1010 Condition B	MIL-STD-883, method 1010 Condition B
Constant Acceleration	MIL-STD-883, method 2001. Condition A, Y1 only (5000 g's)	MIL-STD-883, method 2001. Condition A, Y1 only (5000 g's)
Seal (Fine and Gross Leak) 2/	See 4.8.2.2.2	See 4.8.2.2.2
Particle Impact Noise Detection (PIND)	MIL-STD-883, method 2020 Condition B	N/A
Electrical Test:		
Input Current Power	4.8.5	N/A
Output Waveform	4.8.20	N/A
Output Voltage-Power	4.8.21	N/A
As Specified	3.1	3.1
Burn-In (Load)	+125C, nominal supply voltage and burn-in load, 240 hours minimum	+125C, nominal supply voltage and burn-in load, 160 hours minimum
Electrical Test:	Nominal and extreme supply voltages, specified load, +23°C and temperature extremes, record all test parameters by serial number	Nominal supply voltages, specified load, +23°C and verify frequency at the temperature extremes
Input Current Power	4.8.5	4.8.5
Output Waveform	4.8.20	4.8.20
Output Voltage-Power	4.8.21	4.8.21
As Specified	3.1	3.1
Radiographic 3/	MIL-STD-883, method 2020	N/A

MIL-55310/09-Series 0.410 x 0.300 (in)

PACKAGE DIMENSIONS

PIN	CONNECTION
1-3	No Connect
4	B-Ground/Case *
5	Output
6-7	No Connect
8	Supply Voltage

\* - Case to be connected to base pin 4 to permit shielding of the oscillator.

