


## EP14002X & EP14002X-LF

- Hipot : 700 Vrms Min.
- Add “-LF” after part number for Lead-Free
- Storage Temperature : -40°C to +125°C
- Operating Temperature : 0°C to +70°C


### Electrical Parameters @ 25° C

OCL (mH Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μH Max.)	Primary Et (V-μSec. Min.)	DCR ( Max.)		
				Pins 1-2	Pins 5-6	Pins 7-8
@ 1 KHz, 0.22 Vrms				14	15	16
10	36	14	245			

### Package

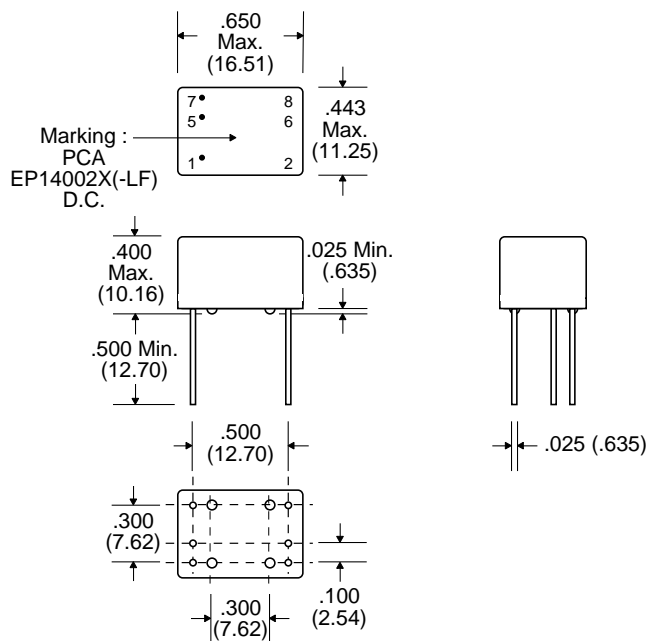

### Schematic



Notes :	EP14002X	EP14002X-LF
1. Lead Finish	SnPb	Hot Tin Dip (Sn)
2. Peak Solder Rating (for wave solder process Only)	260°C	260°C
3. Weight	3.865 grams	3.865 grams
4. Packaging Information (Tray)	TBD pcs / tray	TBD pcs / tray

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25