
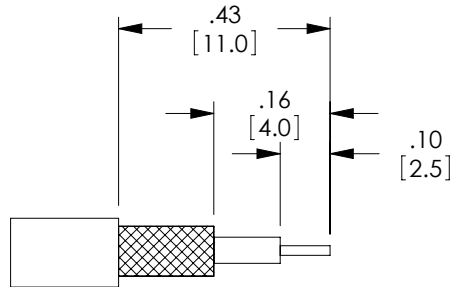
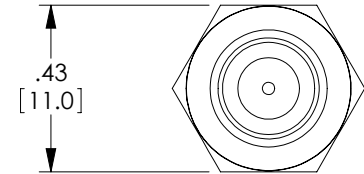



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC.. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATED
CONTACT	BRASS	GOLD PLATED
INSULATOR	TFE	-
FERRULE	BRASS	NICKEL PLATED


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/10/10	D.GRIFFIN



RECOMMENDED
CABLE STRIPPING



RECOMMENDED
FERRULE CRIMP SIZE



RECOMMENDED
CONTACT CRIMP SIZE
(OR SOLDER)

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHM
FREQUENCY RANGE: DC ~ 6 GHz
VOLTAGE RATING: 500 VOLTS PEAK
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS

MISCELLANEOUS:

APPLICATION: RG58, WBC/LMR195, BELDEN 8240/8219.
CABLE RETENTION: 30 LBS PULL

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN
ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ± .005 PROJECTION 	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	11/10/10		
	CHECKED BY K.BURGNER	11/10/10	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	11/10/10	PRODUCT DESCRIPTION W-MALE (WAVERIDER COMPATIBLE) CRIMP FOR RG58, WBC/LMR195	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321	DWG. NO. AWM-1700
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: AWM-1700.SLDDRW	REV. A
		SHEET 1 OF 1		