



# Indoor Current Transformer

## Model JAB-0C – 600V, 10kV BIL, 200 – 3000A

Window Size 4.50" x 3.50"



**APPLICATION**

Designed for indoor service; especially designed for installation over the secondary bushings of pad-mounted transformers from 75 kVA to 3000 kVA. For mounting and application information, including use at higher voltages, and matching the current rating to the pad transformer thermal capability, please refer to the Applications Information section of catalog GEP-9186.

**WEIGHT**

Approximately .....8.25 lbs.

**REFERENCE DRAWINGS**

Outline: ..... 0121C33851

**INSULATION LEVEL**

0.6kV; BIL 10kV full wave.

**FREQUENCY**

50-60 Hz

JAB-0C DATA TABLE								
Current Ratio Pri : Sec	ANSI Accuracy Class @ 60 Hz					Continuous Thermal Current Rating Factor $\psi$		Catalog Number
	B-0.1	B-0.2	B-0.5	B-0.9	B-1.8	@30°C Amb.	@55°C Amb.	
200:5	0.3	---	---	---	---	4.0	2.9	750X136202
300:5	0.3	0.3	---	---	---	4.0	2.9	750X136203
400:5	0.3	0.3	---	---	---	4.0	2.9	750X136204
500:5	0.3	0.3	0.3	---	---	3.0	2.2	750X136205
600:5	0.3	0.3	0.3	---	---	3.0	2.2	750X136206
800:5	0.3	0.3	0.3	---	---	3.0	2.2	750X136208
1000:5	0.3	0.3	0.3	---	---	2.0	1.5	750X136210
1200:5	0.3	0.3	0.3	---	---	2.0	1.5	750X136212
1500:5	0.3	0.3	0.3	0.3	---	2.0	1.5	750X136215
2000:5	0.3	0.3	0.3	0.3	0.3	1.5	1.1	750X136220
3000:5	0.3	0.3	0.3	0.3	0.3	1.33	1.0	750X136230

**Notes:**

$\psi$  A high temperature version is available for use in locations with unusually high ambient temperatures.

### Construction and Insulation

The core and coil assembly is encapsulated in resin within a molded case. The case is molded with GE Valox® thermoplastic polyester resin. This tough material has excellent electrical and mechanical properties over a wide temperature range, has low water absorption and is resistant to oil and a variety of chemicals. The polyurethane resin filling completely encapsulates the winding, leads and terminals to form a waterproof unit. A Valox® cover is attached to the back of the unit to give a neat finished appearance.

### Core and Coils

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire. The secondary windings are evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

### Terminals

Secondary terminals are tin-plated brass, compression type with a 0.275" diameter cross-hole for wiring and a ¼-28 clamp screw. A shorting device is provided and interlocked to the terminal cover. The terminal cover is made of a clear plastic. Provision is made for sealing the cover.

### Polarity

Primary and secondary polarity marks H1, H2 and X1, X2 are molded into the case. In addition H1 and X1 are identified by white dots.

### Primary Conductor

These transformers are primarily intended for installation over the bushing and terminal blade of pad-mount transformers which then forms the primary conductor.

### Nameplates

The nameplate is laser engraved aluminum. It is attached to the top of the unit and has provision for attaching the user's identifying tag. The nominal current rating is marked on both faces of the unit in large numerals using a polyester label.

### Mounting


The transformer can be mounted in any position but is usually installed on the pad-mount transformer terminal blade using the Valox "grabbers". The grabbers are removable and the transformer also has two mounting holes allowing it to be attached to a mounting bracket.

### Maintenance

These transformers require no maintenance, other than occasional cleaning if installed where air contamination is severe.

*Data subject to change without notice*

To purchase or obtain more information about GE Instrument Transformer products, please call GE's Charlotte Service Center at 1-800-431-7867. Product information is also available on our web site at <http://www.GEIndustrial.com>. Click on the Product Index button (right column), select Transformers and follow the menus to **Product Information** or a **Solutions Advisor**.

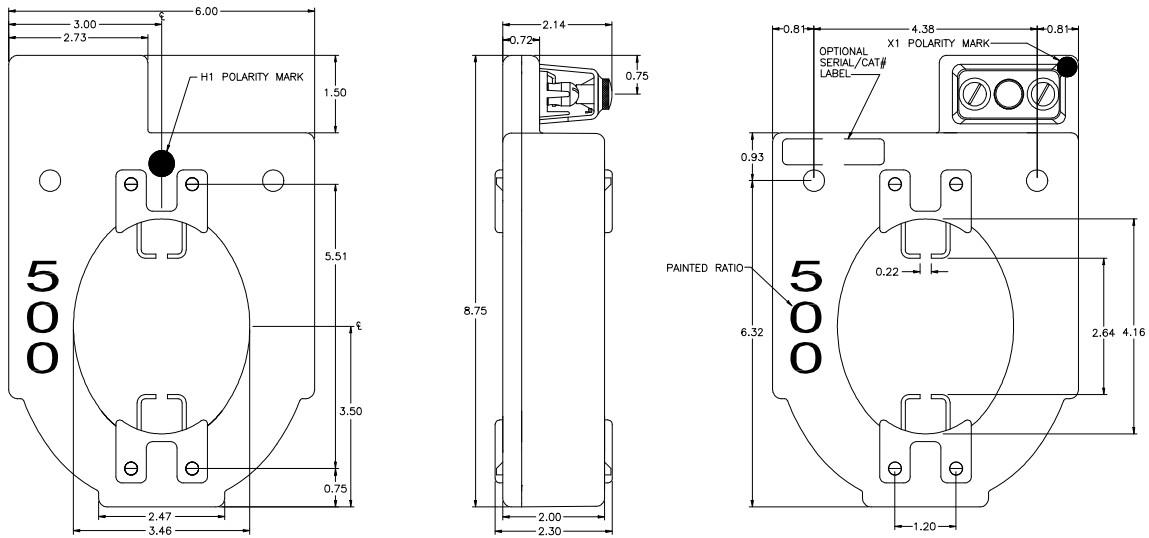

**JAB-0C Dimensions**



130 Main Street  
Somersworth, NH 03878

1907 Calumet Street  
Clearwater, FL 33765

**GE Industrial Systems**