


## RXM-750

### SONET/SDH Fiber-Optic Receiver Module For Applications from 45MB/s to 750Mb/s

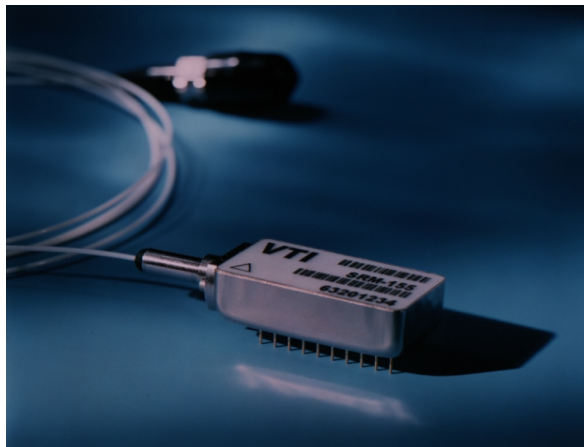

The RXM-750 SONET/SDH Fiber-Optic Receiver Module

#### Features

- Operating range of 45Mb/s to 750Mb/s
- PECL Data Outputs
- Single +5 Volt Supply
- CMOS Loss of Signal Flag
- Operation at 1300nm and 1520nm-1610nm
- 0° to +70°C Operation
- -28dBm minimum sensitivity
- Wide Dynamic Range
- Multi-Sourced 20 Pin DIL Footprint

#### Applications

- Telecom Receiver Applications: Medium and Long Haul SONET/SDH from 45Mb/s to 750Mb/s
- High Performance Datacom Receiver Applications: From 45Mb/s to 750MB/s

#### Description

VI's RXM-750 is an integrated fiber-optic receiver module. It is powered by a single +5V power supply and is housed in a 20 PiN DIL package. It is ideally suited for SONET OC-1, 3, 12 and other 45Mb/s to 750Mb/s fiber-optic transmission applications that demand superior performance. It is available with multi-mode fiber pigtail with either a ST or LC connector.

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

### Functional Overview

This highly integrated module converts a 45Mb/s to 750 Mb/s fiber-optic NRZ signal to differential PECL data outputs. A CMOS flag alerts the user to a loss of signal condition when the optical input falls below an acceptable level.

A single +5 Volt supply provides bias for the module's preamplifier, and Quantizer. The photodiode may be biased to +5 Volts. All elements are integrated into fiber-coupled 1.3" X 0.635" 20 pin DIL package. The RXM-750 footprint and pinout are industry common for ease of integration.

The optical signal is coupled through a 62.5  $\mu\text{m}$  multimode optical fiber to a hermetic module which encases an InGaAs PiN-photodiode and preamplifier. The PiN-photodiode converts the optical signal to an electrical current. The signal is then converted to a voltage and amplified by a low noise transimpedance amplifier.

Further gain is provided by the quantizer, which also provides a Flag output when the optical signal falls below an acceptable level.


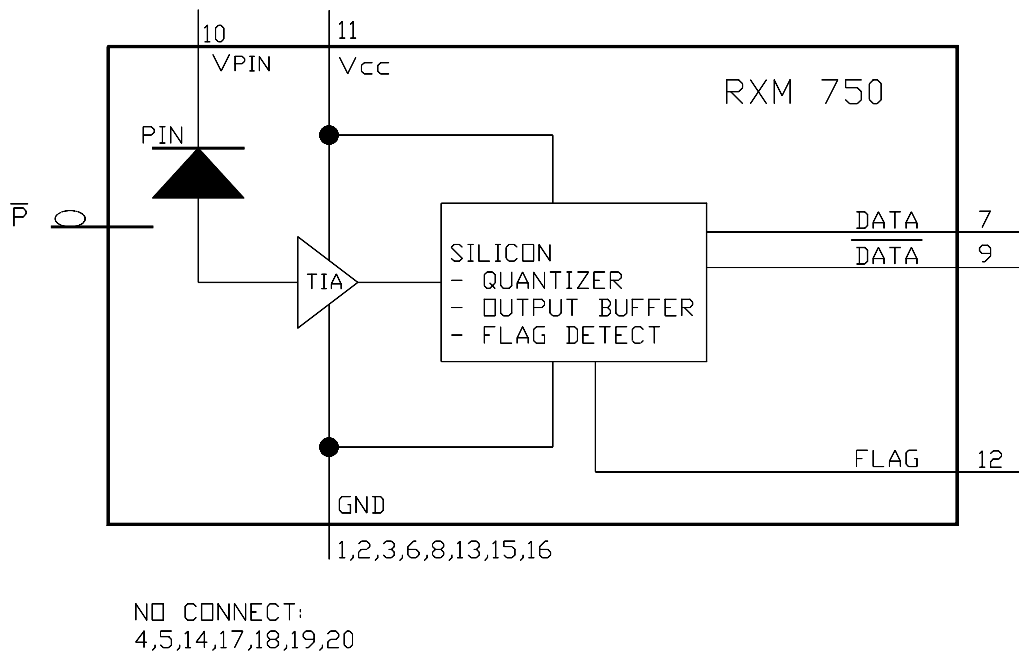


Figure 1. RXM-750 Functional Block Diagram

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

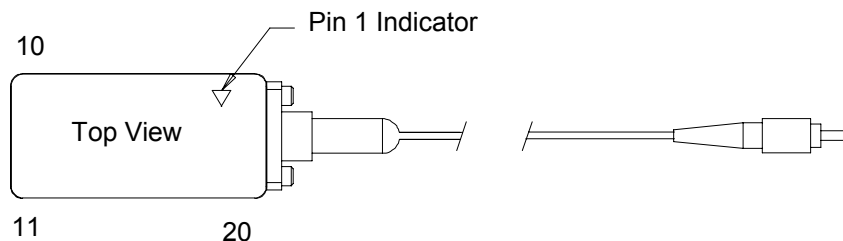

**Figure 2. Pin Diagram (Top View)**

**Table 1. Pin Function**

Pin	Symbol	Function
7	Data	PECL Data Output.
9	Data	PECL Complementary Data Output.
10	$V_D$	Detector Anode Bias. Connect to +5V or a +5V biased series resistor, for received optical power monitoring. <sup>1</sup>
11	$V_{CC}$	5 Volt Supply Voltage.
12	Flag	Input Signal Level Status. This CMOS output switches low when the received optical power falls below the Flag Threshold
1,2,3,6,8,13,15,16	GND	Ground.
4,5,14,17,18,19,20	NC	No User Connection.

1. By connecting pin 10 to a +5 Volt bias through a series resistor (e.g. 1 k $\Omega$ ) received optical power can be monitored as a voltage drop across the resistor.

## Absolute Maximum Ratings

Absolute maximum ratings are provided here as worst case and short duration exposure conditions only. Exposure to conditions more severe than the Absolute Maximum Ratings may result in permanent damage. Exposure to conditions at the Absolute

Maximum Ratings for extended periods may also adversely affect device performance or reliability. Functional operation of the device is not implied at these conditions.

**Table 2. Absolute Maximum Ratings**

Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature Range	$T_S$	-40	85	$^{\circ}\text{C}$
Supply Voltage	$V_{CC}$	0	+6	V
pin Detector Bias	$V_D$	+5	+15	V
Lead Soldering Conditions			250/10	$^{\circ}\text{C/s}$

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

### Performance Characteristics


**Table 3. Electrical Performance**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input Signal Rate <sup>1</sup>	$f_o$	45		750	Mb/s
Operating Temperature	$T_O$	0		+70	°C
Power Supply Voltage	$V_{CC}$	4.5	5.0	5.5	V
pin Detector Bias Voltage (pin10)	$V_D$	5	5	15	V
Power Supply Current	$I_{CC}$			250	mA
Data Output Levels <sup>2</sup>					
Low	$V_{OL}$	$V_{CC} - 1.95$		$V_{CC} - 1.63$	V
High	$V_{OH}$	$V_{CC} - 1.03$		$V_{CC} - 0.88$	V
Data Output Rise and Fall Times <sup>3</sup>	$T_R, T_F$	275	375	575	ps
Received Power Level Flag	LOS				
Decreasing Optical Power			35		dBm
Increasing Optical Power			33		dBm
Flag Hysteresis	Hyst		2		dB

1. Other center frequencies are available. Please contact Vectron International for further details.

2. Measured with a load of  $R_L = 50\Omega$  to  $V_{CC} - 2V$ . See figures 3 and 4. ECL levels are specified for dc measurement, an additional tolerance of 50 mV should be included for dynamic measurements.


3. Measured at 20% to 80% levels.

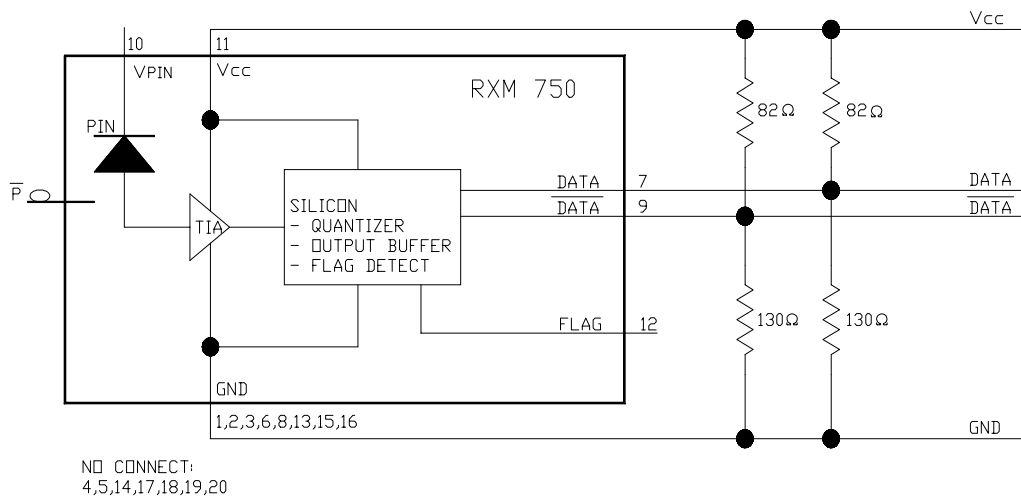


**Figure 3. PECL Interface**

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

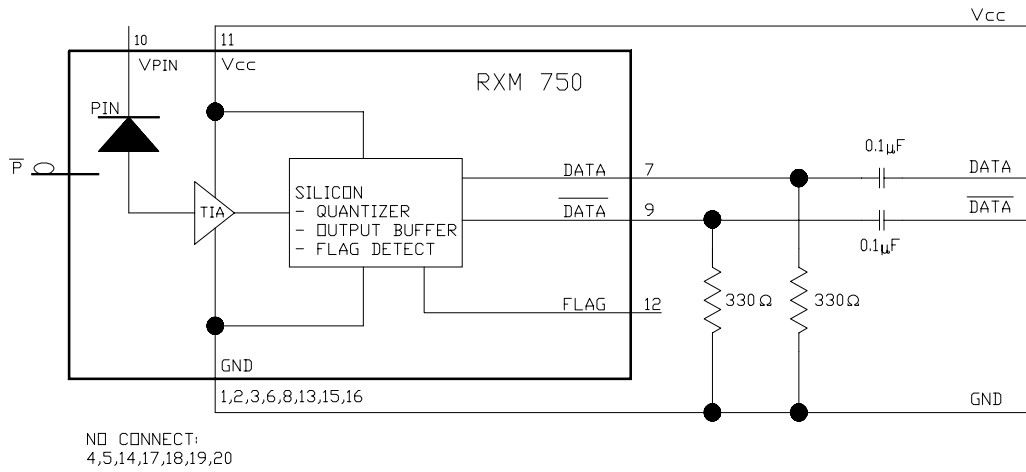

**Figure 4. ECL (AC Coupled) Interface**

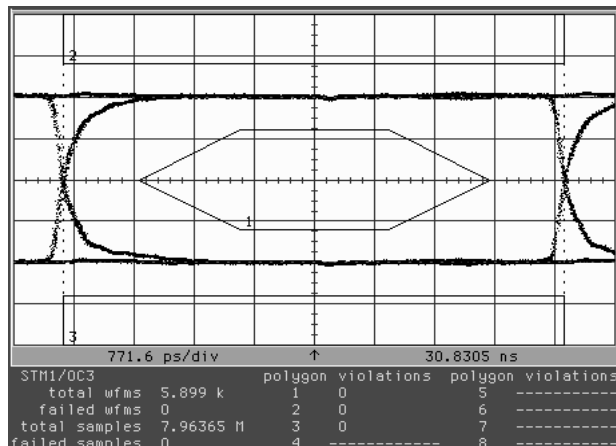

**Figure 5. Typical Performance @ 155.52MHz**

**Table 4. Optical Performance**

Parameter	Symbol	Minimum	Typical	Maximum	Units
Minimum Average Sensitivity <sup>1</sup>	Sens.	-28			dBm
Maximum Optical Input <sup>1</sup>	P <sub>MAX</sub>			-5	dBm
Input Wavelength	$\lambda$	1100		1610	nm

1. For a BER less than 1E-10. Measured using a 2<sup>23</sup>-1 pseudorandom word and a 50% average optical duty cycle and a 10 dB Extinction Ratio.

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

---

### Qualification

The RXM-750 has been designed to comply with the requirements of Bellcore specifications GR-468-CORE, Reliability Assurance for Optoelectronic Devices and will be subject to a complete qualification test plan to demonstrate full compliance. All of the technologies used in the assembly of the module represent standard microelectronic and

optical technologies that are used in similar products, and have extensive field reliability data.

All components and technologies used in the optical receiver are backed by qualification data covering mechanical and environmental tests along with accelerated life tests. Typical test, test conditions and sample size are listed below.

**Table 5. Qualification Plan**

Test	Test Method	Sample Size
Physical Dimensions	MIL-STD-883, Method 2016	11
Mechanical Shock	MIL-STD-883, Method 2002, Test B	11
Vibration, variable frequency	MIL-STD-883, Method 2007, Test A	11
Lead Solderability	MIL-STD-883, Method 2003	22 leads
Lead Integrity	MIL-STD-883, Method 2004	15 leads
Temperature Cycling	-40°C/85°C, 300 cycles	11
High Temperature Aging	85°C under bias, 2000 hours	11
Damp Bake	85°C/85% RH/ 1000hrs	11
Low Temperature Storage	-40°C, 168 hours	11
ESD	MIL-STD-883, Method 3015	3
Destructive Bond Pull	MIL-STD-883, Method 2011	40

**Table 6. Optical Fiber Characteristics**

Parameter	Minimum	Typical	Maximum	Units
Fiber Length		1000		mm
Fiber Core		62.5		μm
Fiber Buffer		900		μm

# RXM-750 SONET/SDH Receiver Module

## Product Data Sheet

### Outline Diagram

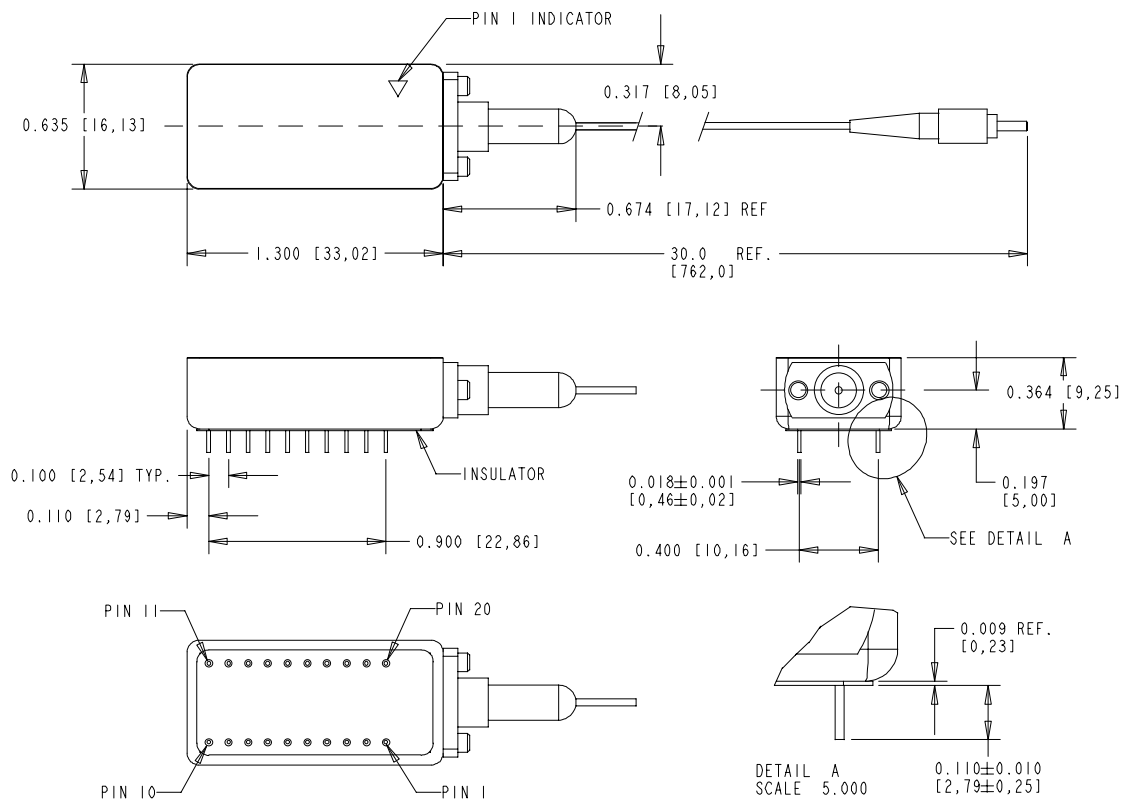


Figure 6. Outline Diagram

### Ordering Information

Standard modules are built with 62.5um MM fiber, with an outer jacket diameter of 900um. Alternative fiber type, connector type and fiber lengths are available upon request. Contact factory for specific details.

Table 7. Part Numbers

Fiber-Optic Connector <sup>1</sup>	Model Number	VI Code Number
ST	RXM-750B	330013284
LC	RXM-750L	330014887

1. Other connectors or fiber requirements are available to meet specific application requirements.



USA: Vectron International • 166 Glover Avenue, Norwalk, CT 06856 • Tel: 1-88-VECTRON-1 • Fax: 1-888-FAX-VECTRON  
 EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK: Tel: 44 (0) 1703 766 288 • Fax: 44 (0) 1703 766 822  
 In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland: Tel: 49(0)7263 6480 • Fax: 49(0)7263 6196  
 ASIA: In China, Taiwan, Japan: Tel: 01 603 598 0070 • Fax: 01 603 598 0075  
 In Korea, Singapore, Australia, India: Tel: 01 203 853 4433 • Fax: 01 203 853 1423

Vectron International, Inc. reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.