

PS12_SC9S_0000_SM09E_XX.X_B0

Description

12 pigtail set, SC BTW, APC 9°, fiber 0.9mm_XX.X_fiber colour EN / IEC, SM G.652.D



Features	Features
- Push-pull connector	
- For APC 8° & APC 9°	
- One-piece design for easy and quick termination	
- High mechanical and thermal resistance according to Telcordia GR-326-CORE and IEC 61753-1 (Cat.U)	

Technical Data

General Data

Description	Values
General Typ	SC pigtail
Operation temperature	-40 up to 85°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

Connector left


Description	Values
Connector typ	SC pigtail
Polish	UPC
Color Housing	Green
Color Boot	Red
Design connector acc. To	IEC 61754-4, TIA 604-3
Performance class H+S	B
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	65
Durability	1000
Performance class H+S	0

Cable

Description	Values
Cable typ	Semi-tight Tube
Fiber count	1
Fiber	1 x 0.9 mm
Fiber typ	E9/125-SM ultra G.652.D / G.657.A1

PS12_SC9S_0000_SM09E_XX.X_B0

Technical Drawing

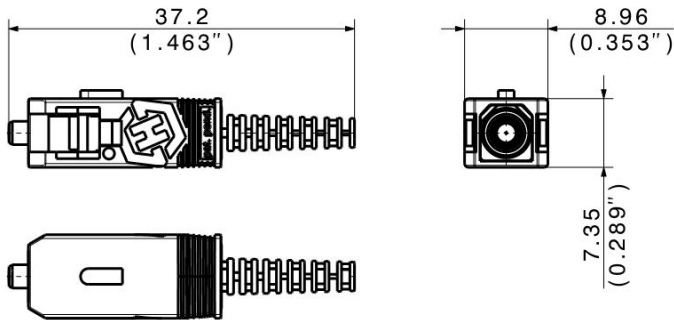

Ordering information

Meter (m)	Item number	Description
2	84127985	PS12_SC9S_0000_SM09E_02.0_B0