

54LVX3383

10-Bit Low Power Bus-Exchange Switch

General Description

The 54LVX3383 provides two sets of high-speed CMOS TTL-compatible bus switches. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise. The device operates as a 10-bit bus switch or a 5-bit bus exchanger. The bus exchange (BX) signal provides nibble swapping of the AB and CD pairs of signals. This exchange configuration allows byte swapping of buses in systems. It can also be used as a quad 2-to-1 multiplexer and to create low delay barrel shifters. The bus enable (\overline{BE}) signal turns the switches on.


Features

- 5 Ω switch connection between two ports
- Minimal propagation delay through the switch
- Ultra low power with 0.2 μ A typical I_{CC}
- Zero ground bounce in flow-through mode
- Control inputs compatible with TTL level
- Available in CDIP and Flatpack packages
- Standard Microcircuit Drawing (SMD) 5962-9950601

Ordering Code


Order Number	Package Number	Package Description
54LVX3383J-QML	J24F	24-Lead Ceramic Dual-in-line
54LVX3383W-QML	W24C	24-Lead Cerpack

Logic Diagram

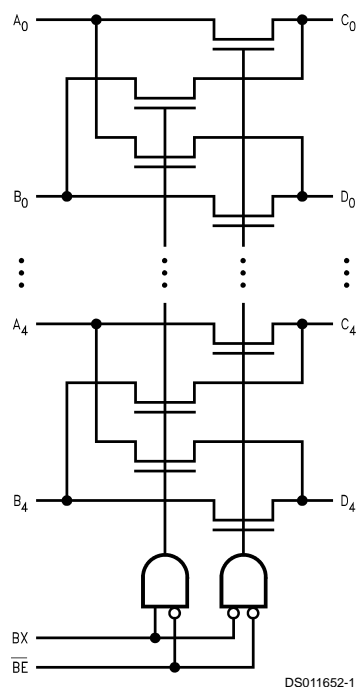

Connection Diagram

Pin Assignment for
CDIP and Cerpack

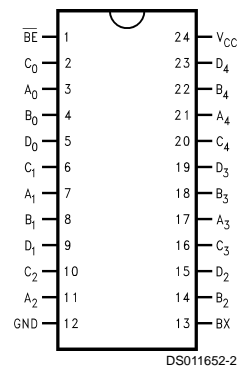

Pin Descriptions

Pin Names		Description		
\overline{BE}		Bus Switch Enable		
BX		Bus Exchange		
A_0-A_4, B_0-B_4		Buses A, B		
C_0-C_4, D_0-D_4		Buses C, D		

\overline{BE}	BX	A_0-A_4	B_0-B_4	Function
H	X	High-Z State	High-Z State	Disconnect
L	L	C_0-C_4	D_0-D_4	Connect
L	H	D_0-D_4	C_0-C_4	Exchange

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Switch Voltage (V_S)	-0.5V to +7.0V
DC Input Voltage (V_I) (Note 2)	-0.5V to +7.0V
DC Input Diode Current (I_{IN}) with $V_I < 0$	-20 mA
DC Output (I_O) Sink Current	30 mA
Storage Temperature Range (T_{STG})	-65°C to +150°C
Junction Temperature (T_J)	175°C
Power Dissipation	500mW

Recommended Operating Conditions

Supply Voltage (V_{CC})	4.5V to 5.5V
Input Voltage (V_{IN})	0V to 5.5V
Input Rise and Fall Time (t_r, t_f)	
Switch Control Input	0ns/V to 8ns/V
Switch I/O	0ns/V to DC
Free Air Operating Temperature (T_A)	-55°C to +125°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

DC Electrical Characteristics

Symbol	Parameter	V_{CC} (V)	$T_A = -55^\circ\text{C to } +125^\circ\text{C}$		Units	Conditions
			Min	Max		
V_{IK}	Maximum Clamp Diode Voltage	4.5		-1.2	V	$I_{IN} = -18 \text{ mA}$
V_{IH}	Minimum High Level Input Voltage	4.5-5.5	2.0		V	
V_{IL}	Maximum Low Level Input Voltage	4.5-5.5		0.8		
I_{IN}	Maximum Input Leakage Current	0		10	μA	$0 \leq V_{IN} \leq 5.5\text{V}$
		5.5		± 1		
I_{OZ}	Maximum TRI-STATE I/O Leakage	5.5		± 10	μA	$0 \leq A, B \leq V_{CC}$
R_{ON}	Switch On Resistance (Note 3)	4.5		10	Ω	$V_I = 0\text{V}, I_{ON} = 30 \text{ mA}$
				20	Ω	$V_I = 2.4\text{V}, I_{ON} = 15 \text{ mA}$
I_{CC}	Maximum Quiescent Supply Current	5.5		10	μA	$V_I = V_{CC}, \text{GND}$ $I_O = 0$
ΔI_{CC}	Increase in I_{CC} per Input (Note 4)	5.5		2.5	mA	$V_{IN} = 3.15\text{V}, I_O = 0$ Per Control Input

Note 3: Measured by voltage drop between A and B pin at indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 4: Per TTL driven input ($V_{IN} = 3.15\text{V}$, control inputs only). A and B pins do not contribute to I_{CC} .

AC Electrical Characteristics

Symbol	Parameter	V_{CC} (V)	$T_A = -55^\circ\text{C to } +125^\circ\text{C}$ $C_L = 50\text{ pF}$		Units
			Min	Max	
$t_{PLH},$ t_{PHL}	Data Propagation Delay A_n to C_n, D_n or B_n to D_n, C_n (Note 6)	4.5-5.5		0.25	ns
$t_{PLH},$ t_{PHL}	Switch Exchange Time BX to A_n, B_n, C_n, D_n	4.5-5.5	1.5	7.0	ns
$t_{PZL},$ t_{PZH}	Switch Enable Time \overline{BE} to A_n, B_n, C_n or D_n	4.5-5.5	1.5	7.0	ns
$t_{PLZ},$ t_{PHZ}	Switch Disable Time \overline{BE} to $A_n, B_n, C_n,$ or D_n	4.5-5.5	1.5	7.0	ns


Note 5: All typical values are at $V_{CC} = 5.0\text{V}, T_A = 25^\circ\text{C}$.

Note 6: This parameter is guaranteed by design but not tested. The bus switch contributes no propagation delay other than the RC delay of the On resistance of the switch and the load capacitance. The time constant for the switch and alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.

Capacitance (Note 7)

Symbol	Parameter	Max	Units	Conditions
C_{IN}	Control Input Capacitance	12	pF	$V_{CC} = 5.0\text{V}$
$C_{I/O} \text{ (OFF)}$	Input/Output Capacitance	20	pF	$V_{CC} = 5.0\text{V}$

Note 7: Capacitance is characterized but not tested.

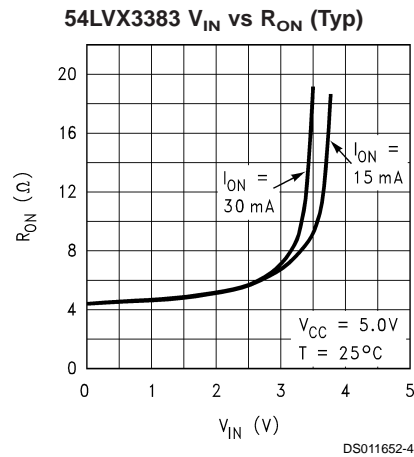




Figure 1 is a mechanical drawing of the W24C (REV E) showing three views: a top view, a side view, and a detail view (Detail A).

Top View Dimensions:

- Overall width: 0.625 (0.590)
- Distance from left edge to first vertical line: 0.090 (0.060)
- Distance between vertical lines: 0.040 (0.030)
- Distance between vertical lines: 0.050 ± 0.005
- Distance from last vertical line to right edge: 0.005 MIN TYP
- Distance from left edge to first vertical line: 0.006 (0.004)

Side View Dimensions:

- Overall height: 0.420 MAX
- Distance from top edge to first horizontal line: 0.370 (0.250)
- Distance from bottom edge to last horizontal line: 0.370 (0.250)
- Distance from left edge to first horizontal line: 0.015 (0.008)
- Distance from left edge to last horizontal line: 0.019 (0.015 TYP)
- Distance from left edge to last horizontal line: 0.015 (0.008)

Detail A Dimensions:

- Distance from left edge to first horizontal line: 0.015 (0.008)
- Distance from left edge to last horizontal line: 0.019 (0.015 TYP)
- Distance from left edge to last horizontal line: 0.015 (0.008)

Other Dimensions:

- Distance from left edge to first horizontal line: 0.006 (0.004)
- Distance from left edge to last horizontal line: 0.005 MAX

W24C (REV E)

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507