


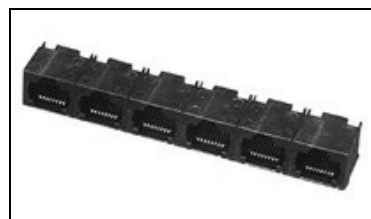

406539-1 Product Details

[Share](#) | [Print](#) | [Email](#)


406539-1

PCB Mounted Jacks - Single Port, Multi-port and Stacked

Not reviewed for RoHS Compliance

Product Highlights:

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 2 Jack Configuration
- Jack Type = RJ25

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 406539-1

Superseded

[Add to My Part List](#) |
 [Request Sample](#) |
 [Find Similar Products](#) |
 [Buy Product](#)

[Contact Product Information Center](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	--

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Connector • Jack Type = RJ25 • PCB Mounting Orientation = Side Entry (Right Angle) • PCB Mount Style = Through Hole • Performance Category = Cat 5 • LED = Without • Grounding Options = Without • Panel Stops = Without • Keyed = No • Profile = Standard • Color = Black <p>Mechanical Attachment:</p> <ul style="list-style-type: none"> • Panel Mount Retention = Without • Boardlock = Split Leg <p>Termination Features:</p> <ul style="list-style-type: none"> • Termination Method to PC Board = Solder <p>Dimensions:</p> <ul style="list-style-type: none"> • PCB Tail Length (mm [in]) = 2.74 [0.108] <p>Body Features:</p> <ul style="list-style-type: none"> • Inverted Jack Face = Yes <p>Contact Features:</p> <ul style="list-style-type: none"> • Solder Tail Contact Plating = Tin-Lead over Nickel • Contact Plating, Mating Area, Material = Gold (50) • Contact Base Material = Copper Alloy 	<p>Housing Features:</p> <ul style="list-style-type: none"> • Housing Material = High Temperature Thermoplastic <p>Configuration Features:</p> <ul style="list-style-type: none"> • Preloaded = Yes • Port Configuration = Multiple • Jack Configuration = 1 x 2 • Number of Positions = 6 • Shielded = No • Number of Contacts Loaded = 6 • Number of Contacts Loaded, RJ11 (6 Positions) = 6 <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = Not reviewed for ELV/RoHS compliance • Lead Free Solder Processes = Not reviewed for lead free solder process • UL Flammability Rating = UL 94V-0 <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Tube • Packaging Quantity = 22 <p>Product Availability:</p> <ul style="list-style-type: none"> • Region = Asia, North America <p>Other:</p> <ul style="list-style-type: none"> • Brand = AMP • Comment = Recommended applications: Fast Ethernet, 10Base-T Ethernet, and 10/100 Base-T Ethernet (Cat 5 on two pair 1/2, 3/6).
--	---

Feedback

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

