



samtec

**MOLD-TO-POSITION
PRODUCT**

 Minimums or set-up charges
may apply. Call Samtec.


APO-314-T-A



APH-316-T-H

LOW PROFILE ADAPTORS

**APO & APH
SERIES**

 Mates with:
ICO, ICA, CIC

SPECIFICATIONS

 For complete specifications
see www.samtec.com/APO
Insulator Material:

 Black Glass Filled
Polyester

Flammability Rating:

UL 94V-O

Insulation Resistance:
5000 megohm @ 500 VDC

Operating Temperature Range:
-55°C to +125°C

Withstanding Voltage:
1000 VRMS @ 60 Hz

Terminal Material:
Brass

Plating:


 Au over 50µ" (1,27µm) Ni
or Sn over 100µ" (2,54µm) Cu
or 50µ" Ni

Current Rating:
1 A

APO
**ROW SPACING &
NO. OF CONTACTS**
**PLATING
OPTION**
**LEAD
STYLE**

Specify from chart below




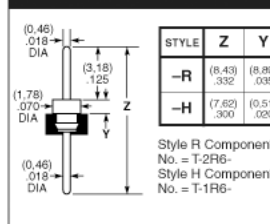

- Side & end stackable
- Open body design



	Row Space	No. of Contacts
-308		08
-314		14
-316		16
-318		18
-320		20
-324		24
-422	.400 (10,16)	22
-624		24
-628	.600 (15,24)	28
-640		40

-G
= 20µ" (0,51µm) Gold

-T
= Tin

-A or -A1 = Round Pin

-C = Slotted Head

-J = Solder Shell

-R or -H = Low Profile

-T = Short Tail

Note:

 Some sizes, styles and
options are non-standard,
non-returnable.

APH
**ROW
SPACE**
**NO. OF
PINS**
**PLATING
OPTION**
**LEAD
STYLE**

 Row Spacing
EXAMPLE:
-3 = .300 centers

**-02
thru
-19**
-G
= 20µ" (0,51µm) Gold

-T
= Tin

SPECIFICATIONS

 For complete specifications
see www.samtec.com/APH

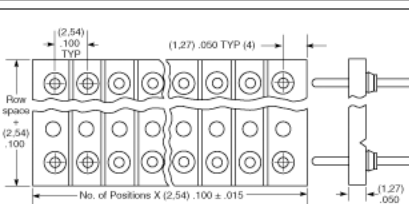



Same as APO except:

Insulation Material:

Black Thermoplastic

Temperature Range:
-55°C to +140°C

Heat Deflection Temp:
215°C @ 264 psi

Note: This Series is
non-standard, non-returnable.

**02
thru
40**
-R
= Low Profile

-H
= Low Profile

-T
= Short Tail


Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299
 SAMTEC JAPAN • Tel: +65-84477280 • Fax: +65-84477281
 SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681
 SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520
 SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61
 SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-61103766
 SAMTEC SOUTH AFRICA • Tel: 27 11 4528112 • Fax: 27 11 4528112
 SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113
 SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315
 SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187
 SAMTEC TAIWAN • Tel: 886 02 2698-3367 • Fax: 886 02 2698-2159
 SAMTEC HONG KONG • Tel: 852-26904858 • Fax: 852-26904842
 SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745