FLT0111-0.75-0 - ACTIVE

Raychem

TE Internal #: 6085613001 Hook Up Wire, FlexLite, 600V Voltage Rating, Black Wire Color, 20AWG Wire Size, .75mm² Wire Size, Operating Temperature Range -65 – 150 °C

View on TE.com >

Wire & Cable > Hook Up Wire



Cable Type: FlexLite Voltage Rating: 600 V Wire Color: Black Insulation Material: Radiation-Crosslinked, Modified Polyalkene Conductor Material: Tin-Plated Copper

Features

Product Type Features

Product Type

Product Classification

= TEconnectivity

Wire

Wire - Commercial

Cable Style	Primary, Stranded	
Cable Type	FlexLite	
Configuration Features		
Number of Conductors	1	
Number of Strands	19	
Electrical Characteristics		
Resistance (Max)	24.7 Ω/1000 ft @ 68°F	
Voltage Rating	600 V	
Body Features		
Weight	8.2 kg/km	
Wire Color	Black	
Insulation Material	Radiation-Crosslinked, Modified Polyalkene	
Conductor Material	Tin-Plated Copper	
Dimensions		
Conductor Size	.75 mm²	

FLT0111-0.75-0

Hook Up Wire, FlexLite, 600V Voltage Rating, Black Wire Color, 20AWG Wire Size, . 75mm² Wire Size, Operating Temperature Range -65 – 150 °C



Wire Diameter	1.524 mm[.06 in]		
Conductor Diameter Range	1.05 – 1.15 mm[.041 – .045 in]		
Overall Outside Diameter	1.56 mm[.0615 in]		
Overall Outside Diameter Range	1.41 – 1.56 mm[.055 – .061 in]		
Conductor Diameter	.59 mm[.024 in]		
Strand Size	32 AWG		
Wire Size	.75 mm ²		
Usage Conditions			
Operating Temperature Range	-65 – 150 °C		
Product Compliance For compliance documentation, visit the product page on TE.com>			
EU RoHS Directive 2011/65/EU	Compliant		
EU ELV Directive 2000/53/EC	Compliant		
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold		
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209)		

Halogen Content

Does not contain REACH SVHC

Out of Scope - excluded from Halogen requirements

Not applicable for solder process capability

Solder Process Capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


FLT0111-0.75-0

Hook Up Wire, FlexLite, 600V Voltage Rating, Black Wire Color, 20AWG Wire Size, . 75mm² Wire Size, Operating Temperature Range -65 – 150 °C





Customers Also Bought

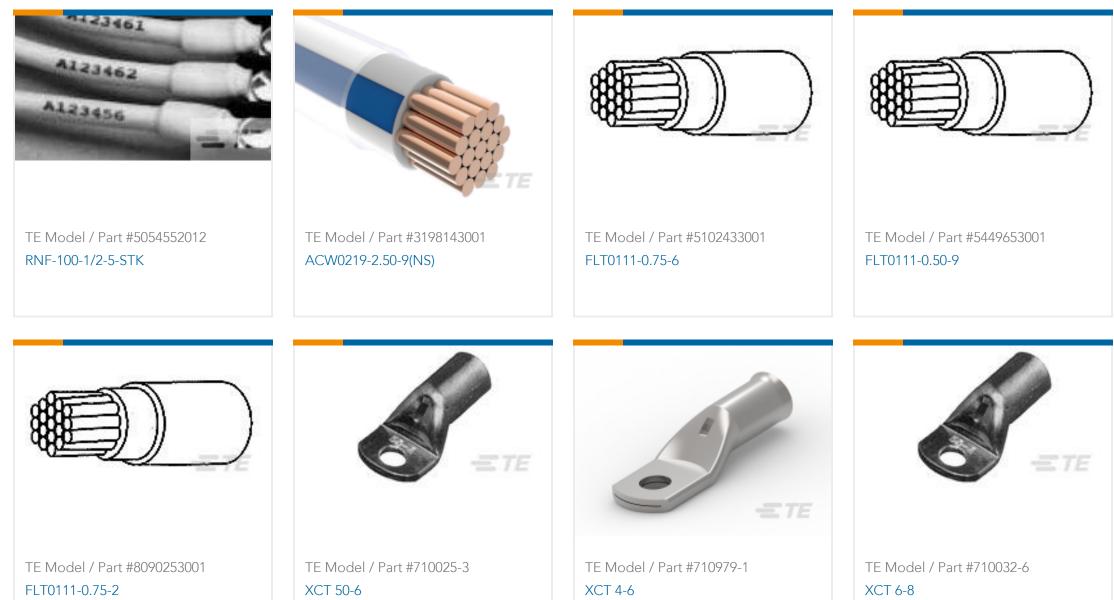

FL10111-0.75-2	ACT 30-0	ACT 4-0	ACT 0-0



Documents

Product Drawings FLT0111-0.75-0

English

Datasheets & Catalog Pages 1654025_Sec9_FlexLite

English

Wire and Cable Overview

English

FLT0111-0.75-0

Hook Up Wire, FlexLite, 600V Voltage Rating, Black Wire Color, 20AWG Wire Size, . 75mm² Wire Size, Operating Temperature Range -65 – 150 °C

