




P.C.B. LAYOUT



SCHEMATIC




Specifications:

Contact rating: switching: 25mA, 24V DC
 non-switching: 100mA, 50V DC
Contact resistance: 50mOhm max.
Insulation resistance: 100MOhm min. at 500V DC
Dielectric strength: 500V AC for 1 minute
Operating temperature: -40°C to +85°C
Storage temperature: -40°C to +85°C
Mechanical life: 5 000 cycles min.
Electrical life: 2 000 cycles (25mA, 24V DC)
Operating force: 1 000g max.
Soldering conditions: wave soldering: 260°C, 10sec. max.
Material: Cover: PBT (UL94V-0), red
 Base: PA66 (UL94V-0), black
 Actuator: PA66 (UL94V-0), white
 Contact: gold plated
 Terminal: tin plated
 Tape: polyester film

x	Option
(empty)	no tape seal
F	actuator covered by tape seal

Packaging:

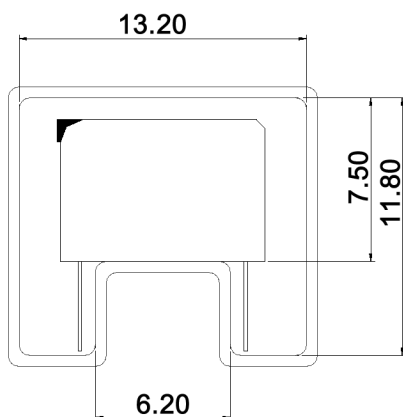

Pole	A	Quantity per tube
2	6.08	85
3	8.62	61
4	11.16	47
5	13.70	38
6	16.24	32
7	18.78	28
8	21.32	24
10	26.40	20
12	31.48	16



Tolerances:	Date	Name
	04/09	dr
Modifications	Date	Name

DBP 9000 x

knitter-switch

30 17 64

Page

1/1