

ADSL Magnetics

Level One SK70740/41/42 (LXT 770)

- Designed to comply with the requirements as specified by Level One for HDSL2 and G.SHDSL applications
- Complies with the requirements of IEC 950 for supplementary insulation at 250V
- Operating temperature range: -40° C to +85° C
- Meets IEC 695, 2-2 flammability requirements
- PWB Process Capability: standard printed wiring board assembly techniques, total-immersion cleaning
- Reliability testing: shock, vibration, temperature cycling, temperature - humidity - bias

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Package	Turns Ratio	Inductance ² mH ±5%	DCR Ω max		Leakage Inductance μH max	Dielectric Rating Vrms min
		Line : Chip ¹	(5-1) ³	(5-1) ³	(6-9) ⁵	(5-1) ⁴	between (5-1) & (6-9) ¹
S560-6600-L1	SMD	2.3 : 1	2	1.95	0.95	22	1500

1. connect terminals 2 to 4 & 8 to 7

2. measured at 10 kHz, 0.1 Vrms


3. connect 2 to 4

4. connect terminals 2 to 4, 8 to 7 & 6 to 9

5. connect 8 to 7


SCHEMATIC

S560-6600-L1

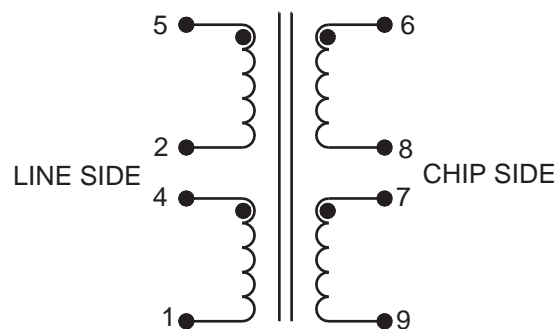

MECHANICAL

S560-6600-L1

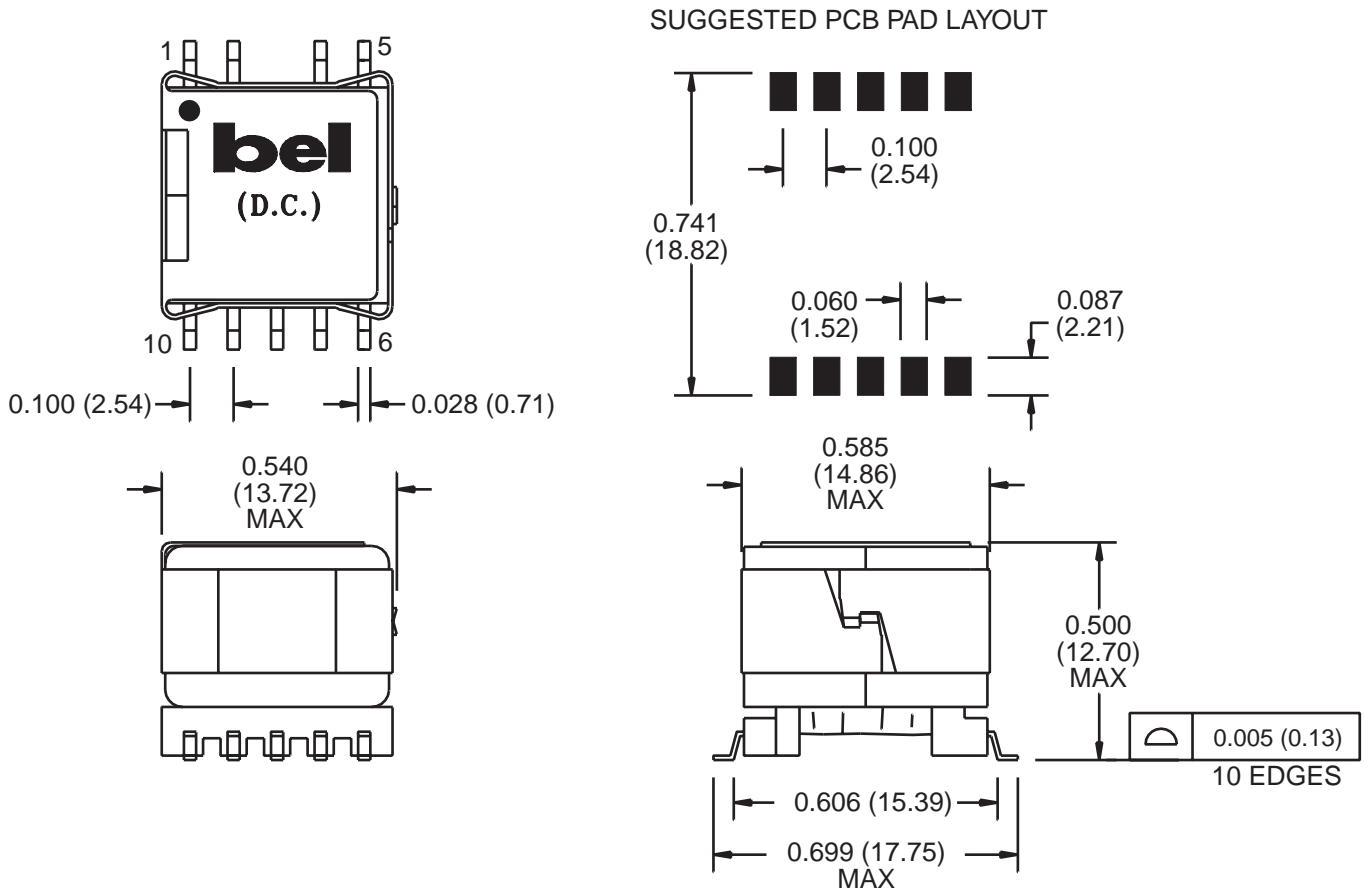

©2000 Bel Fuse Inc. Specifications subject to change without notice. 08.00

CORPORATE

Bel Fuse Inc.
198 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com