




DRAWING NO
C- 210794

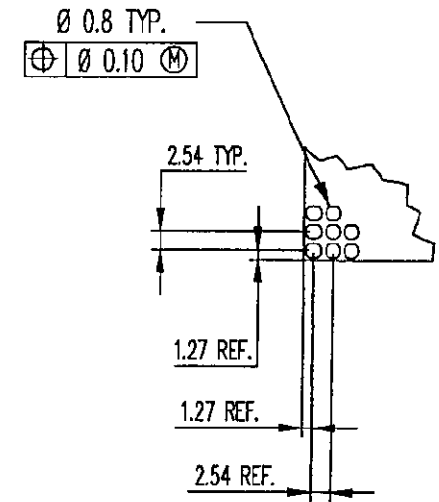

133 positions
 Ech. 1:1

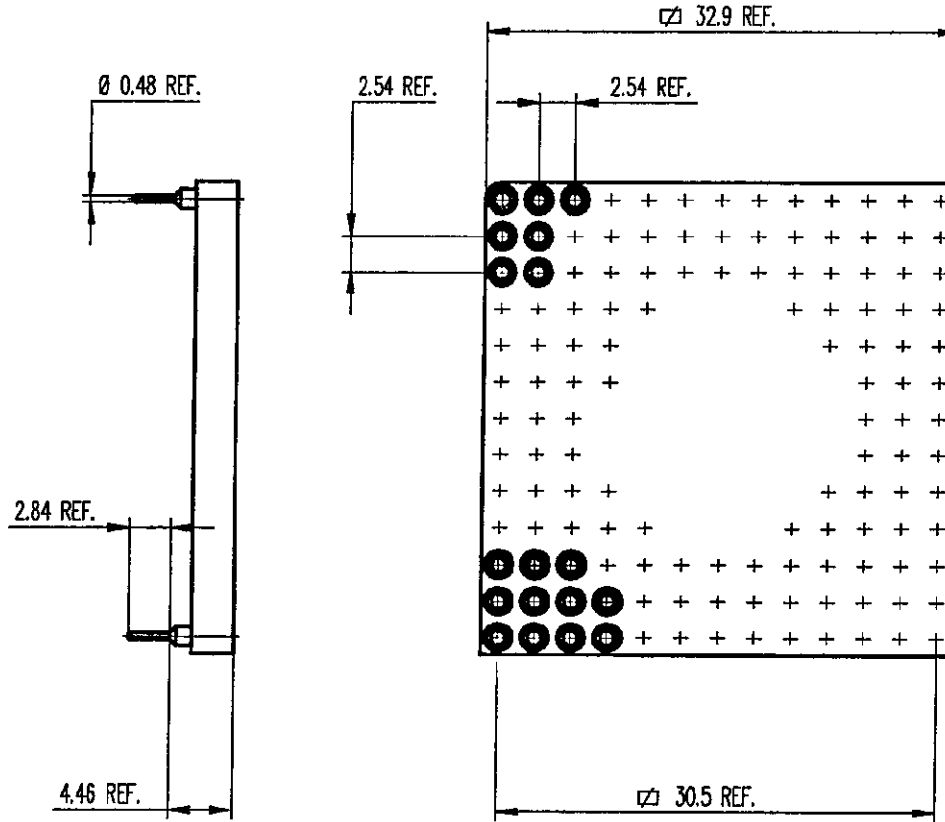

RECOMMENDED P.C.
 BOARD PATTERN

NOTES :

1. SOLDER TAIL PLATING
 STANDARD 5µm Sn/Pb OVER 2-3µm Ni
 PREFIX "1-" 0.25µm Au OVER 2-3µm Ni
2. INNER CONTACT PLATING
 SUFFIX "-1" 0.25µm 18c. Au
 SUFFIX "-2" 0.50µm 18c. Au
 SUFFIX "-3" 0.75µm 18c. Au
 SUFFIX "-4" 0.75µm 24c. Au
 SUFFIX "-5" 5µm MIN. Sn/Pb
 SUFFIX "-6" 0.1µm FLASH 24c. Au
3. INNER SPRING CONTACT ACCEPT Ø 0.40
 TO 0.56 OR RECTANGULAR PIN 0.25x0.45

DIMENSIONS	mm							DRAWN P.-A. MEIER	02 APR 97	THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM DSM SWITZERLAND.			
								CHECKED A. BOLIS	03 APR 97				
SURFACE TEXTURE	NZ/ (✓)							APPROVED		NAME			
CONCENTRICITY	0.15		A	EW00-0024-97	P.-A. MEIER	02 APR 97	P.-A. MEIER	CUSTOMER DRAWING		CLOSED FRAME LIF PGA			
PRODUCT SPEC.		P	REV	ECN	DRWN	DATE	APVD	FOR REFERENCE ONLY		13 x 13, 133 SOCKETS			
AMP		DSM DECOLLETAGE SA SAINT-MAURICE CH 1890 SAINT-MAURICE (VS)						LOC EK	SCALE 2/1	SIZE A4	DRAWING NO C- 210794	SHEET 1 of 1	REVISION A