

CURRENT TRANSFORMER

Electrical Specifications at 25°C




Parameter	Min.	Typ.	Max.	Units
Inductance * Pins 4-6	7.68	10.98	14.27	mH
DCR (4-6)		130		mΩ
DCR (1-8)		1.1		mΩ
Isolation	3000			VAC
Turns Ratio (Primary to Secondary)	1 : 50			

* Tested at 100 mV, 1 kHz

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Designed for switching power supply applications.

Dimensions inches (mm)

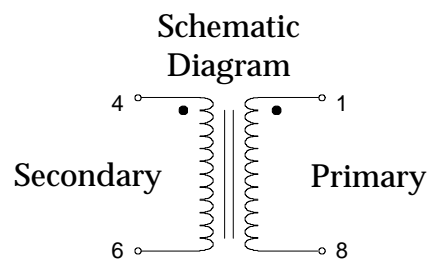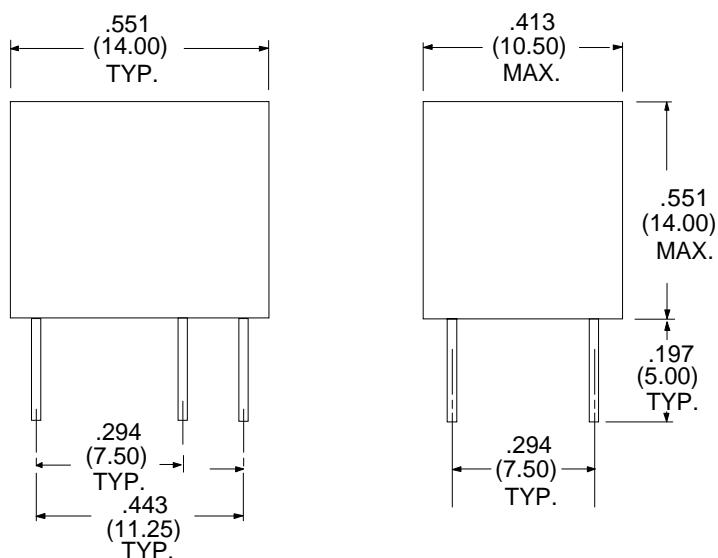

RHOMBUS P/N: L-366

CUST P/N:

NAME:

DATE: 1/02/01

SHEET: 1 OF 1