
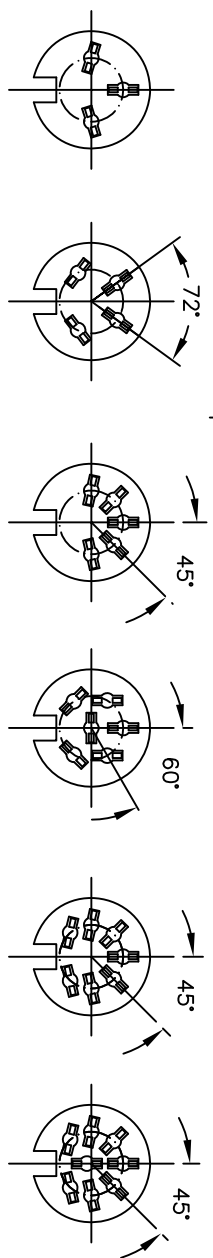


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/18/05	
A	10521	REDRAWN	9/10/10	

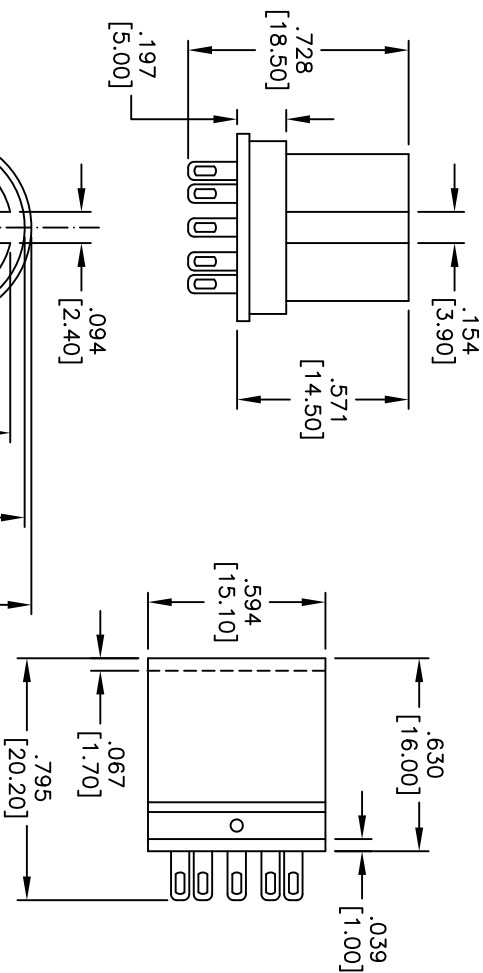

- DS-003-M
- DS-004-M
- DS-005-M
- DS-006-M
- DS-007-M
- DS-008-M

**SPECIFICATIONS:**

**Material:**  
 Housing: ABS  
 Contact: Brass, Tin plated  
 Metal Shell: Brass, Nickel plated

**Electrical:**  
 Rating: 100V AC max. or 12V DC, 2A max.  
 Insulation resistance: 50 Mohms min. @250V DC  
 Withstanding voltage: 250 VAC for 1 minute

**Environmental:**  
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLS

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **DIN JACK MOLDING TYPE**

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DS-XXX-M	A
REF: S000871	SCALE: NTS	SHEET 1 OF 2