

HIGH ISOLATION VOLTAGE DARLINGTON TRANSISTOR TYPE SOP MULTI PHOTOCOUPLER

PS2702-1

FEATURES

- **HIGH ISOLATION VOLTAGE**
BV:3.75 k V r.m.s. MIN
- **SOP (SMALL OUT-LINE PACKAGE)**
- **ISOLATED CHANNELS PER EACH PACKAGE**
- **HIGH CURRENT TRANSFER RATIO**
CTR: 200% MIN @ $I_F = 1$ mA, $V_{CE} = 2$ V
- **HIGH SPEED SWITCHING**
 $t_r, t_f = 200$ μ s TYP
- **TAPE AND REEL AVAILABLE**

DESCRIPTION

PS2702-1 is an optically coupled isolator containing a GaAs light emitting diode and an NPN silicon Darlington-connected phototransistor. This device is mounted in a plastic SOP (Small Outline Package) for high density applications and has a shield effect to cut off ambient light.

APPLICATIONS

Interface circuit for various instrumentations and control equipment.

- **AC LINE/DIGITAL LOGIC**
- **DIGITAL LOGIC INTERFACE**
- **TWISTED PAIR LINE RECEIVER**
- **TELEPHONE/TELEGRAPH LINE RECEIVER**
- **HIGH FREQUENCY POWER SUPPLY FEEDBACK CONTROL**
- **RELAY CONTACT MONITOR**
- **POWER SUPPLY MONITOR**

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

PART NUMBER			PS2702-1		
SYMBOLS	PARAMETERS	UNITS	MIN	TYP	MAX
Diode	V_F	Forward Voltage, $I_F = 5$ mA	V	1.1	1.4
	I_R	Reverse Current, $V_R = 5$ V	μ A		5
	C_t	Terminal Capacitance, $V = 0$, $f = 1.0$ MHz	pF	30	
Transistor	I_{CEO}	Collector to Emitter Dark Current, $V_{CE} = 40$ V, $I_F = 0$	nA		400
Coupled	CTR	Current Transfer Ratio ¹ , $I_F = 1$ mA, $V_{CE} = 2$ V	%	200	2000
	$V_{CE(sat)}$	Collector Saturation Voltage, $I_F = 1$ mA, $I_C = 2$ mA	V		1.0
	R_{i-o}	Isolation Resistance, $V_{in-out} = 1.0$ kV DC	Ω	10^{11}	
	C_{i-o}	Isolation Capacitance, $V = 0$, $f = 1.0$ MHz	pF		0.4
	t_r	Rise Time ² , $V_{CC} = 5$ V, $I_C = 2$ mA, $R_L = 100$ Ω	μ s	200	
	t_f	Fall Time ² , $V_{CC} = 5$ V, $I_C = 2$ mA, $R_L = 100$ Ω	μ s	200	


Notes:

1. CTR rank
K: 2000 to (%)
L: 700 to 3400 (%)
M: 200 to 1000 (%)



PS2702-1

2. Test Circuit for Switching Time




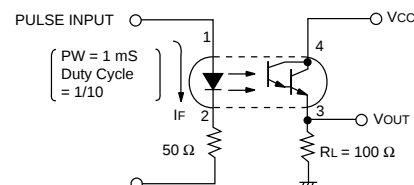


ABSOLUTE MAXIMUM RATINGS¹ (T_A = 25°C)







SYMBOLS	PARAMETERS	UNITS	RATINGS
			PS2702 -1
Diode			
I _F	Forward Current (DC)	mA	50
V _R	Reverse VoltageV	6	
P _D	Power Dissipation	mW/Ch	80
ΔP _D /°C	Power Dissipation Derating	mW/°C	0.8
I _F (PEAK)	Peak Forward Current (PW = 100 μs, Duty Cycle 1%)	A	1
Transistor			
V _{CEO}	Collector to Emitter Voltage	V	40
V _{ECO}	Emitter to Collector Voltage	V	6
I _C	Collector Current	mA/Ch	200
P _C	Power Dissipation	mW/Ch	150
ΔP _C /°C	Power Dissipation Derating	mW/°C	1.5
Coupled			
BV	Isolation Voltage ²	V _{r.m.s.}	3750
T _{STG}	Storage Temperature	°C	-55 to +150
T _A	Ambient Temperature	°C	-55 to +100

- Notes:
1. Operation in excess of any one of these parameters may result in permanent damage.
 2. AC voltage for 1 minute at T_A = 25 °C, RH = 60 % between input and output.




TYPICAL PERFORMANCE CURVES (T_A = 25°C)

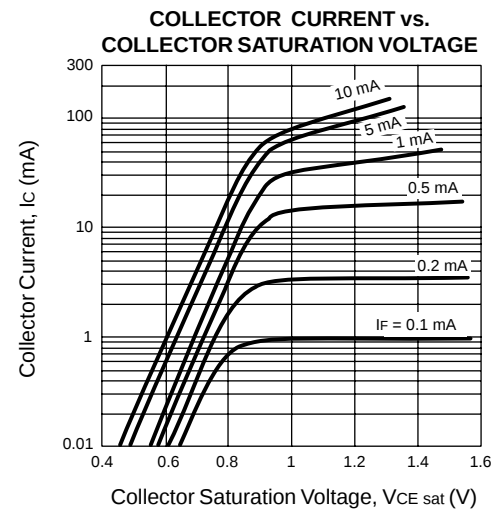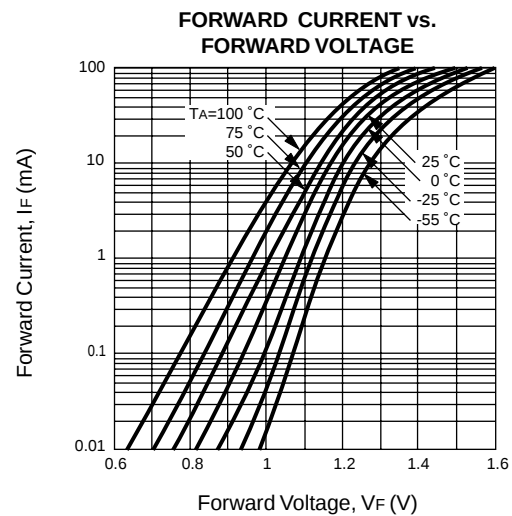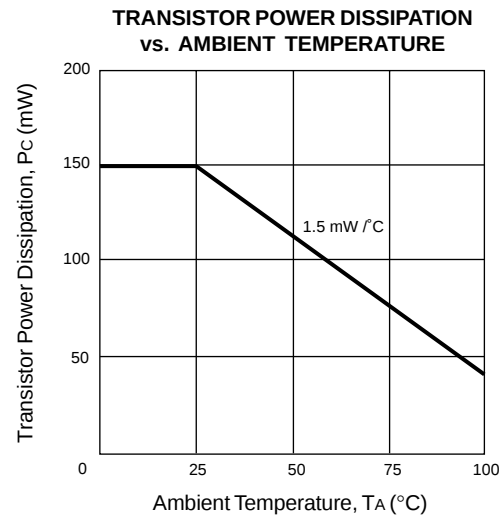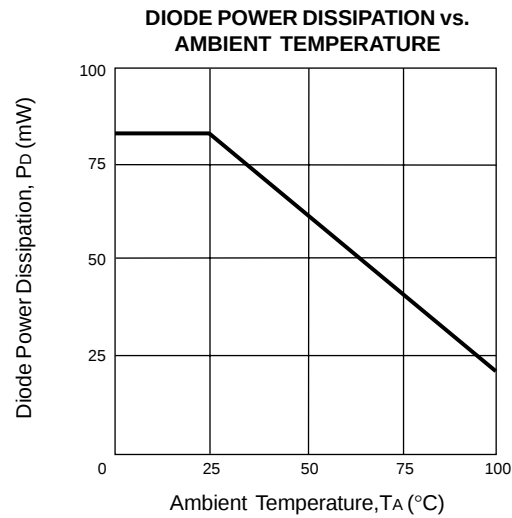


TYPICAL PERFORMANCE CURVES ($T_A = 25^\circ\text{C}$)

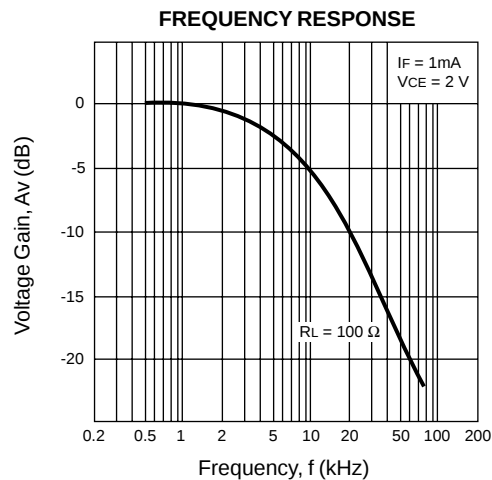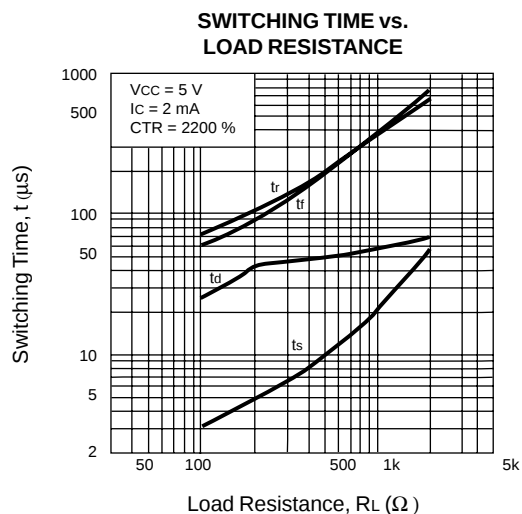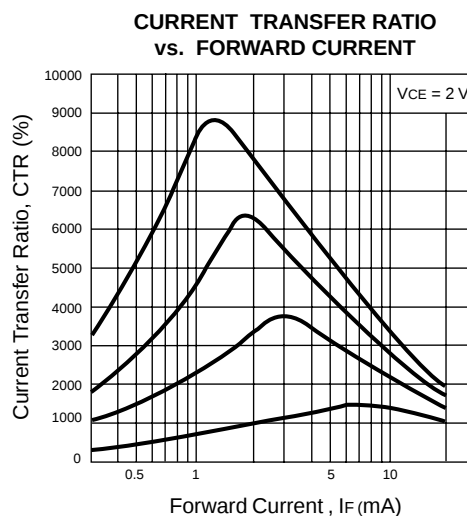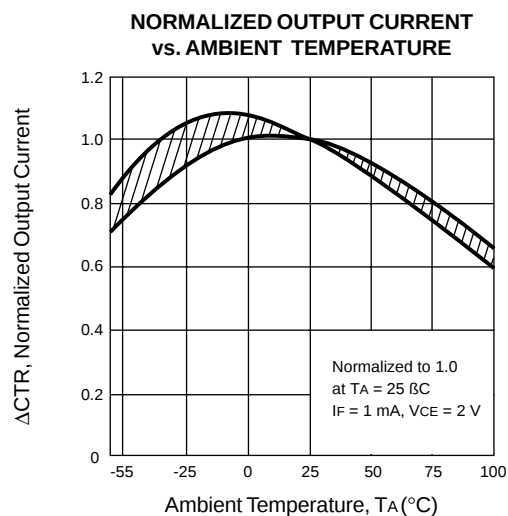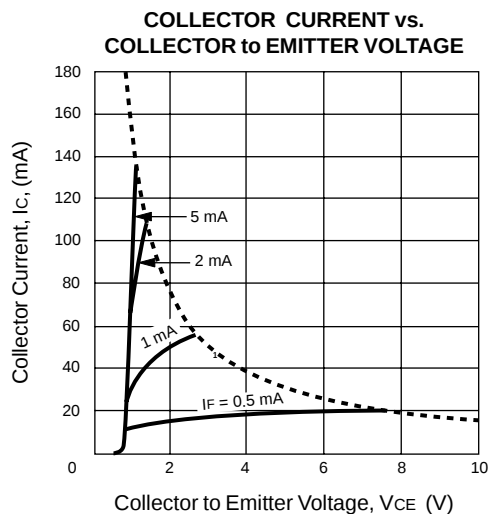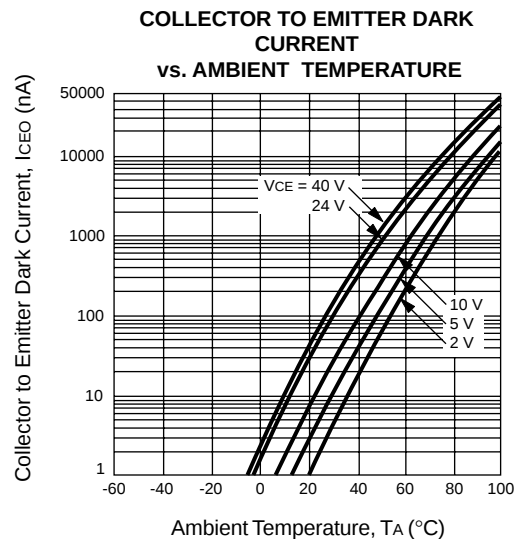

TYPICAL PERFORMANCE CURVES (TA = 25 °C)

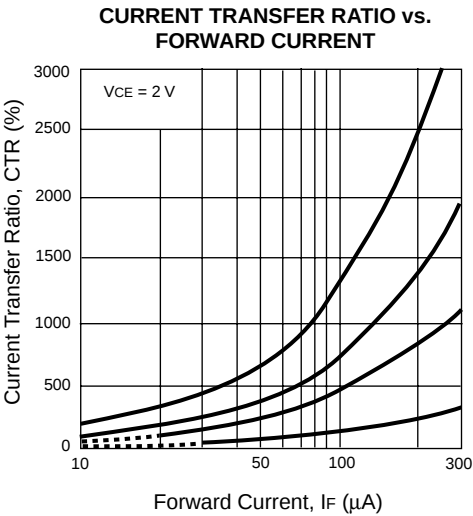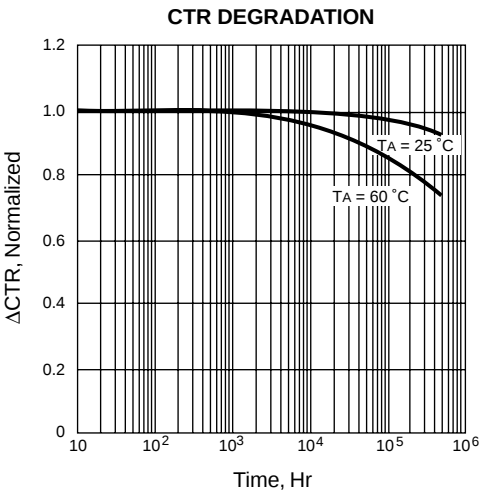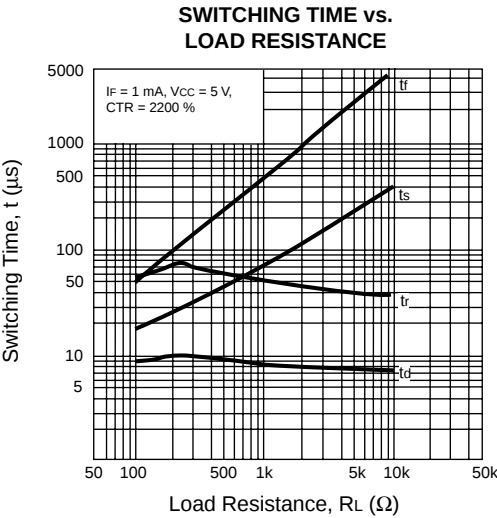


OUTLINE DIMENSIONS (Units in mm)

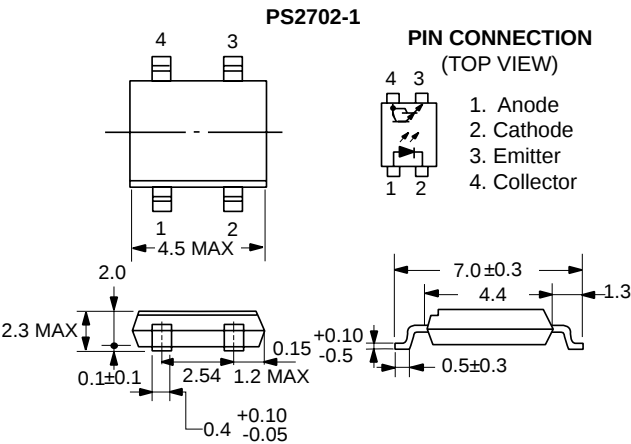


TAPING SPECIFICATIONS (Units in mm)


OUTLINE AND DIMENSIONS (TAPE)

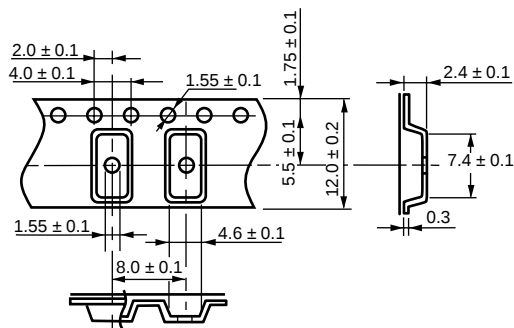

TAPING DIRECTION

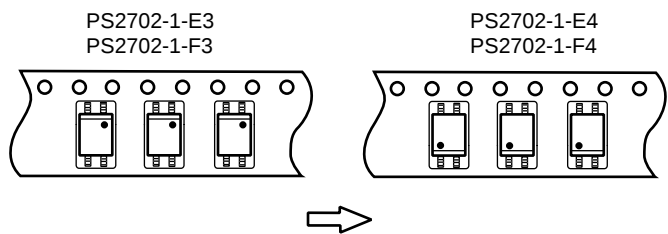

OUTLINE AND DIMENSIONS (REEL)

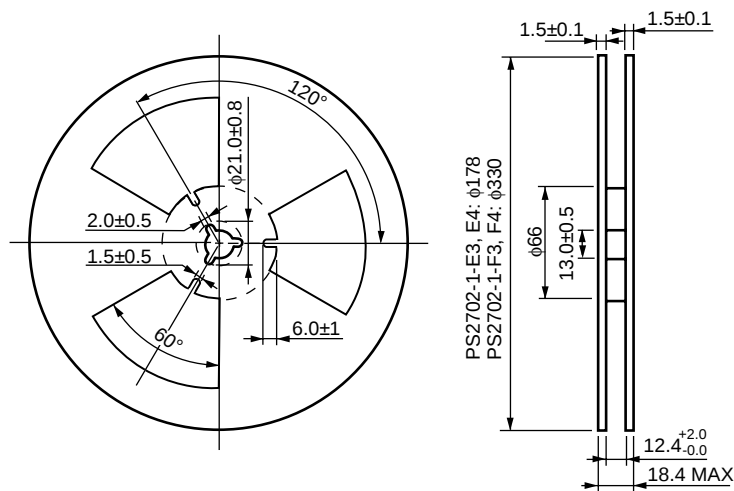



Packing: PS2702-1-E3, E4 900 pcs/reel
PS2702-1-F3, F4 3500 pcs/reel

RECOMMENDED SOLDERING CONDITIONS

(1) Infrared reflow soldering

- **Peak reflow temperature** 235 °C (package surface temperature)
- **Time of temperature higher than 210 °C** 30 seconds or less
- **Number of reflows** Three
- **Flux** Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended).

Recommended Temperature Profile of Infrared Reflow

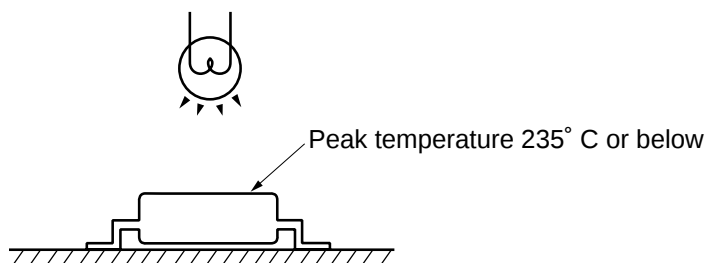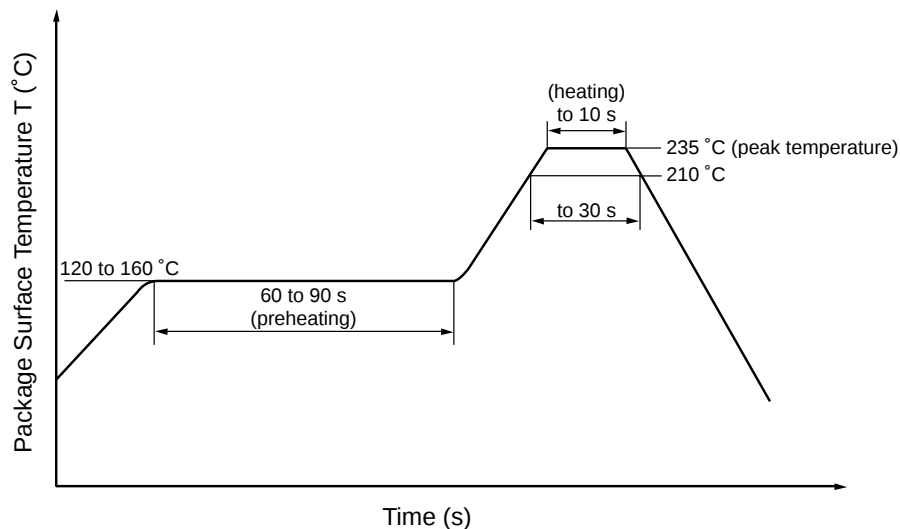

(2) Dip soldering

- **Temperature** 260 °C or below (molten solder temperature)
- **Time** 10 seconds or less
- **Number of times** One
- **Flux** Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended).

(3) Cautions

- **Fluxes**

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.