




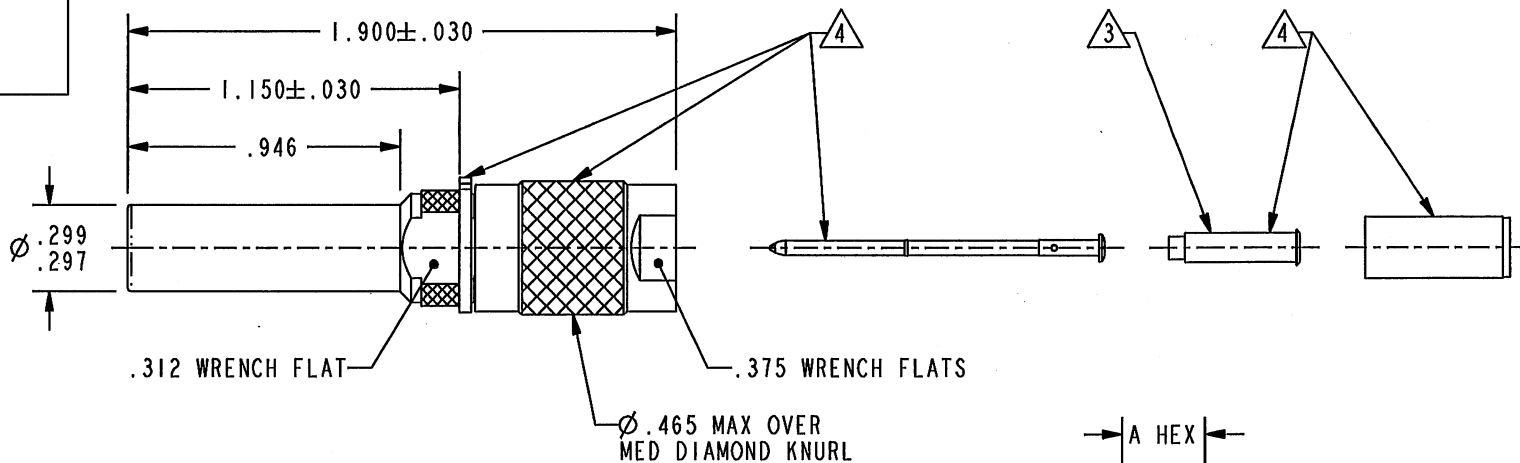


DASH NO	CABLES ACCOMMODATED	A HEX	ASSEMBLE PER
-003	RG-174, 316	.178	SEE SH 3
-004	RG-179, 187		
-005	NORTHERN ELECTRIC DBL-SHIELD RG-187	.197	
-006	GC875GPI, GRUMMAN DBL-SHIELD RG-188		
-007	275-3991, MICRODOT	.178	
-008	RG-195, -180 421-111, ESSEX		
-009	8218, BELDEN 21-597, ESSEX YR23023, BELDEN		
-025	734A, AT&T	.255	
-026	735A, AT&T	.178	
-026-X	735 TYPE 		
-027	KS19224L2, AT&T		

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.


REVISIONS			
REV	DESCRIPTIONS	DATE	APPROVED
G	REVISED PER ECO 16140	6/18/06	<i>umc</i>



RED INDICATES ORIGINAL

-  105-1534-026-X USES 8-3349 CRIMP SLEEVE
-  PIN, SLEEVE, LOCKING RING, CRIMP SLEEVE, AND CLAMP NUT ARE SUPPLIED LOOSE
-  SLEEVE REQUIRED ON -003 THRU -007 AND -027 ONLY
- 2. FINISH: TFS-1A (NICKEL)
- 1. RF COAXIAL 75Ω MINIATURE PATCH STANDARD CRIMP CABLE PLUG WITH LOCKING PLATE

NOTES: UNLESS OTHERWISE SPECIFIED.

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. .XX ± .02 .XXX ± .010 ANGLE ± 1°			
DRN J. CARPENTER	04-27-06	MATERIAL:			
CHK <i>CM</i>	5/26/06	FINISH:		SIZE A	CAGE CODE 14949
MANUF				DRAWING NO. 105-1534	REV. G
APPROVED <i>AM</i>	5/30/06			SCALE 3/2	DATE 2-14-94
PROJ FILE NO. 105-1534		DO NOT SCALE DWG		SHEET 1C	

NEXT ASSY