


SAW Clock Oscillators Surface Mount Type KC7050S-C3 Series (FSO-2D Series)



CMOS/ 3.3V/ 7.0×5.0mm

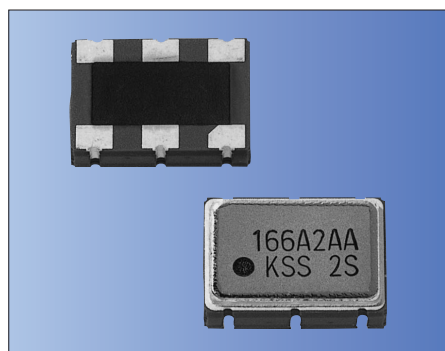

Pb Free

RoHS Compliant

Features

- CMOS output 3.3V
- Low jitter
- Operation at fundamental high frequency

Table 1

Freq. Tol. Code	$\times 10^{-6}$	Operating Temperature Range (°C)	Note
1	± 100	0 to +70	Standard specifications

How to Order

KC7050S 155.520 C 3 1 B 00
① ② ③ ④ ⑤ ⑥ ⑦

- ① Type (7.0×5.0mm SMD)
- ② Output Frequency
- ③ Output Type (CMOS)
- ④ Supply Voltage (3.3V)
- ⑤ Frequency Tolerance (See Table 1)
- ⑥ Symmetry/ Enable Function (40/ 60%, Stand-by)
- ⑦ Customer Special Model Suffix (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./reel)

Specifications


Item	Symbol	Conditions	Min.	Max.	Units
Output Frequency Range	f _o		100	200	MHz
Frequency Tolerance	f _{tol}	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration Op. Temp.: 0 to +70°C	-100	+100	$\times 10^{-6}$
Storage Temperature Range	T _{stg}		-55	+125	°C
Operating Temperature Range	T _{use}	Standard Specifications	0	+70	°C
Max. Supply Voltage	—		-0.5	+5	V
Supply Voltage	V _{cc}	3.3V	3.14	3.46	V
Current Consumption (Standard Loaded)	I _{cc}		—	60	mA
Symmetry	SYM		40	60	%
Rise/ Fall Time (10% V _{cc} to 90% V _{cc} Standard Loaded)	t _{r/ f}		—	2	nS
Low Level Output Voltage	V _{OL}		—	10% V _{cc}	V
High Level Output Voltage	V _{OH}		90% V _{cc}	—	V
Output Load (CMOS)	CL		—	15	pF
Input Voltage Range	V _{IN}		0	V _{cc}	V
Low Level Input Voltage	V _{IL}		—	30% V _{cc}	V
High Level Input Voltage	V _{IH}		70% V _{cc}	—	V
Disable Time	t _{dis}		—	200	nS
Enable Time	t _{ena}		—	2	mS
Start-up Time	t _{str}	@ Minimum operation voltage to be 0 sec.	—	10	mS
Deterministic Jitter (DJ)	DJ		0.2 typ.		pS
1 Sigma Jitter	JSigma	Measured with Wavecrest DTS-2079 VISI 6.3.1	3 typ.		pS
Peak to Peak Jitter	JPK-PK		20 typ.		pS

Note: All electrical characteristics are defined at the maximum load and operating temperature range.

Please contact us for inquiry about operating temperature range, available frequencies and other conditions.

Dimensions

(Unit: mm)

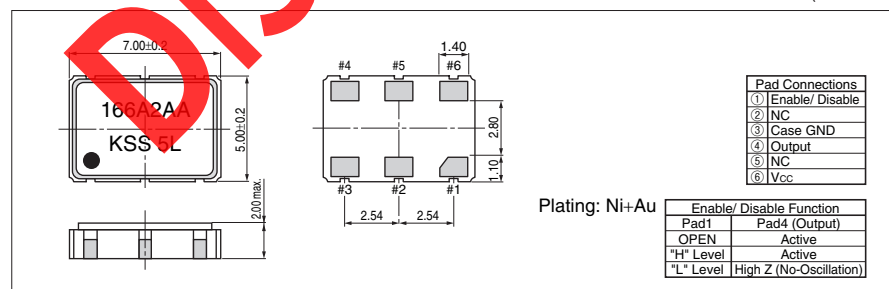

Recommended Land Pattern

(Unit: mm)

