

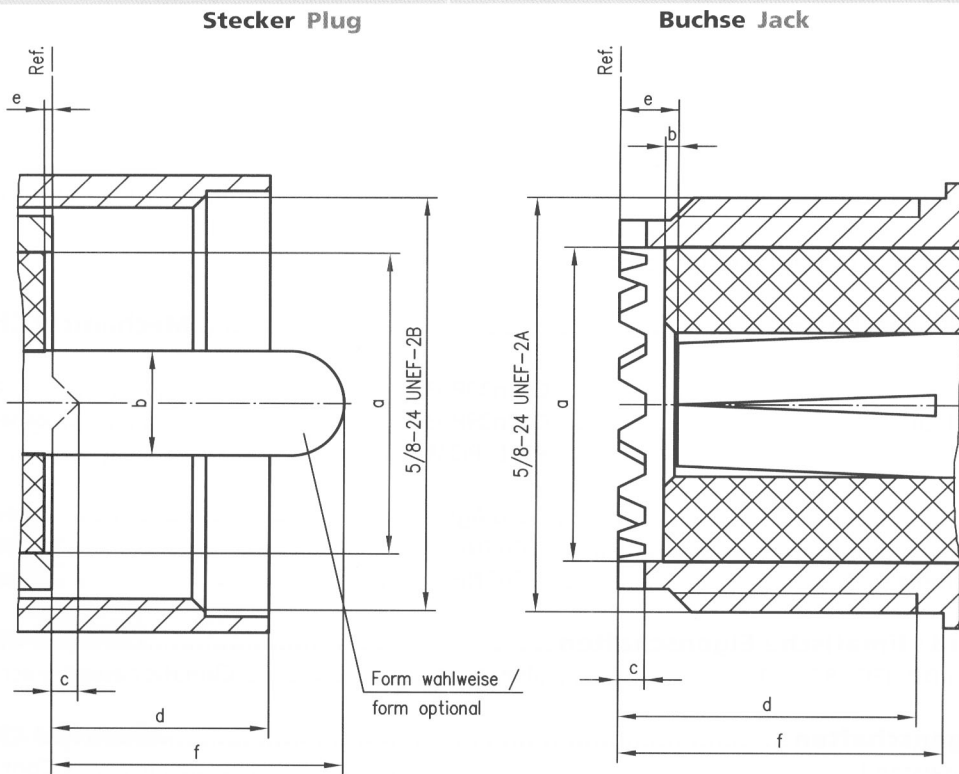


UHF-Steckgesicht UHF Mating Face



	Stecker Plug				Buchse Jack				
	mm		inch		mm		inch		
	min.	max.	min.	max.	min.	max.	min.	max.	
a	11.56	12.22	0.455	0.481	11.56	12.22	0.455	0.481	a
b	3.912	4.013	0.154	0.158	0.03	-	0.001	-	b
c	-	0.89	-	0.035	0.89	-	0.035	-	c
d	-	9.91	-	0-390	7.87	-	0.310	-	d
e	0.00	-	0.000	-	1.02	-	0.040	-	e
f	-	11.10	-	0.437	11.10	-	0.437	-	f

1 UHF-Kabelstecker UHF Straight Plug

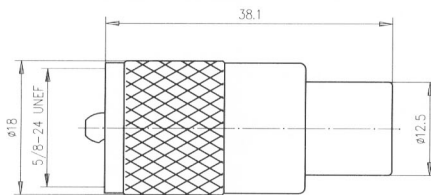

Bestell-Nr. Order Nr.	MIL-Std. MIL-Std.	Kabelgruppe; Kabel Cable group; cable	Montage Assembly	Anmerkungen Remarks
J01040A0602	PL 259/9	RG-213/U	B07	Isolierung: POM insulator: POM
J01040B0602	PL 259/9	RG-213/U	B07	Isolierung: PTFE insulator: PTFE
J01040A0604	PL 259/6	G1 (RG-58C/U); G2 (RG-59B/U)	B07	Isolierung: POM insulator: POM
J01040B0604	PL 259/6	G1 (RG-58C/U); G2 (RG-59B/U)	B07	Isolierung: PTFE insulator: PTFE