

SN54LS348, SN74LS348 (TIM9908) 8-LINE TO 3-LINE PRIORITY ENCODERS WITH 3-STATE OUTPUTS

OCTOBER 1976 — REVISED MARCH 1988

- 3-State Outputs Drive Bus Lines Directly
- Encodes 8 Data Lines to 3-Line Binary (Octal)
- Applications Include:
N-Bit Encoding
Code Converters and Generators
- Typical Data Delay . . . 15 ns
- Typical Power Dissipation . . . 60 mW

description

These TTL encoders feature priority decoding of the inputs to ensure that only the highest-order data line is encoded. The 'LS348 circuits encode eight data lines to three-line (4-2-1) binary (octal). Cascading circuitry (enable input E1 and enable output EO) has been provided to allow octal expansion. Outputs A0, A1, and A2 are implemented in three-state logic for easy expansion up to 64 lines without the need for external circuitry. See Typical Application Data.


FUNCTION TABLE

EI	INPUTS								OUTPUTS				
	0	1	2	3	4	5	6	7	A2	A1	A0	GS	EO
H	X	X	X	X	X	X	X	X	Z	Z	Z	H	H
L	H	H	H	H	H	H	H	H	Z	Z	Z	H	L
L	X	X	X	X	X	X	X	L	L	L	L	L	H
L	X	X	X	X	X	X	L	H	L	L	H	L	H
L	X	X	X	X	L	H	H	H	L	H	L	L	H
L	X	X	X	L	H	H	H	H	H	L	L	L	H
L	X	X	L	H	H	H	H	H	H	L	H	L	H
L	X	L	H	H	H	H	H	H	H	H	L	L	H
L	L	H	H	H	H	H	H	H	H	H	H	L	H

H = high logic level, L = low logic level, X = irrelevant
Z = high-impedance state


SN54LS348 . . . J OR W PACKAGE
SN74LS348 . . . D OR N PACKAGE

(TOP VIEW)




SN54LS348 . . . FK PACKAGE

(TOP VIEW)



NC - No internal connection

logic symbol†

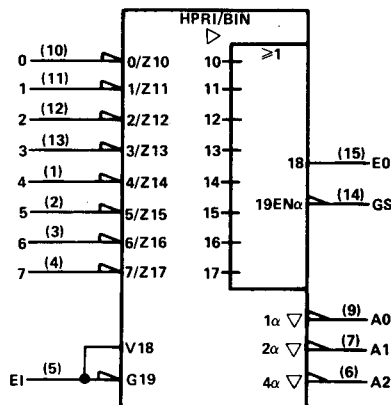

† This symbol is in accordance with ANSI/IEEE Std. 91-1984 and IEC Publication 617-12.

Pin numbers shown are for D, J, N, and W packages.

2
TTL Devices

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.


TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2-845


SN54LS348, SN74LS348 (TIM9908)
8-LINE TO 3-LINE PRIORITY ENCODERS WITH 3-STATE OUTPUTS

logic diagram (positive logic)

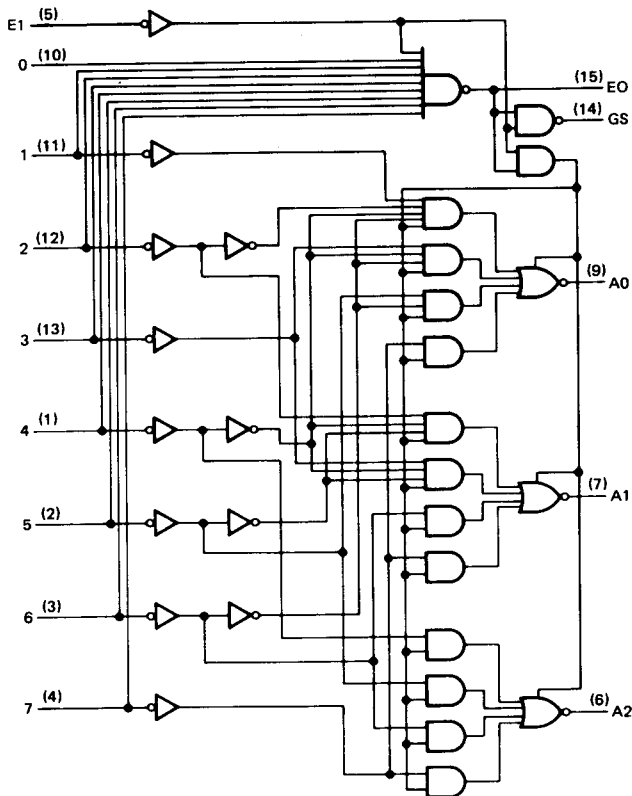

Pin numbers shown are for D, J, N, and W packages.

schematic of inputs and outputs

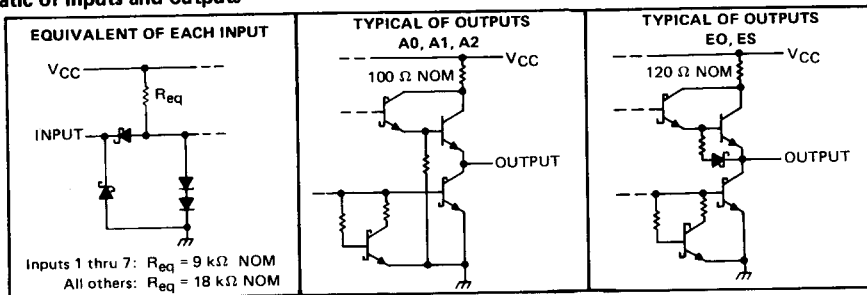

SN54LS348, SN74LS348 (TIM9908)

8-LINE TO 3-LINE PRIORITY ENCODERS WITH 3-STATE OUTPUTS

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, V_{CC} (see Note 1)	7 V
Input voltage	7 V
Operating free-air temperature range: SN54LS348	-55°C to 125°C
SN74LS348	0°C to 70°C
Storage temperature range	-65°C to 150°C

NOTE 1: Voltage values are with respect to network ground terminal.

recommended operating conditions

		SN54LS348			SN74LS348			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
Supply voltage, V_{CC}		4.5	5	5.5	4.75	5	5.25	V
High-level output current, I_{OH}	A0, A1, A2	-1			-2.6			mA
	EO, GS	-400			-400			μ A
Low-level output current, I_{OL}	A0, A1, A2	12			24			mA
	EO, GS	4			8			mA
Operating free-air temperature, T_A		-55		125	0		70	°C

2

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		SN54LS348		SN74LS348		UNIT		
				MIN	TYP‡	MAX	MIN		TYP‡	MAX
V_{IH}	High-level input voltage			2		2		V		
V_{IL}	Low-level input voltage			0.7		0.8		V		
V_{IK}	Input clamp voltage	$V_{CC} = \text{MIN}, I_I = -18 \text{ mA}$		-1.5		-1.5		V		
V_{OH}	High-level output voltage	A0, A1, A2	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL\text{max}}$	$I_{OH} = -1 \text{ mA}$	2.4	3.1		V		
		EO, GS		$I_{OH} = -2.6 \text{ mA}$			2.4		3.1	
V_{OL}	Low-level output voltage	A0, A1, A2	$V_{CC} = \text{MIN}, V_{IH} = 2 \text{ V}, V_{IL} = V_{IL\text{max}}$	$I_{OL} = 12 \text{ mA}$			0.25	0.4	V	
		EO, GS		$I_{OL} = 24 \text{ mA}$				0.35		0.5
				$I_{OL} = 4 \text{ mA}$	0.25	0.4	0.25	0.4		
		$I_{OL} = 8 \text{ mA}$				0.35	0.5			
I_{OZ}	Off-State (high-impedance state) output current	A0, A1, A2	$V_{CC} = \text{MAX}, V_{IH} = 2 \text{ V}, V_O = 2.7 \text{ V}, V_O = 0.4 \text{ V}$		20		20	μ A		
I_I	Input current at maximum input voltage	Inputs 1 thru 7	$V_{CC} = \text{MAX}, V_I = 7 \text{ V}$		0.2		0.2	mA		
		All other inputs			0.1		0.1			
I_{IH}	High-level input current	Inputs 1 thru 7	$V_{CC} = \text{MAX}, V_I = 2.7 \text{ V}$		40		40	μ A		
		All other inputs			20		20			
I_{IL}	Low-level input current	Inputs 1 thru 7	$V_{CC} = \text{MAX}, V_I = 0.4 \text{ V}$		-0.8		-0.8	mA		
		All other inputs			-0.4		-0.4			
I_{OS}	Short-circuit output current§	Outputs A0, A1, A2	$V_{CC} = \text{MAX}$		-30	-130	-30	-130	mA	
		Outputs EO, GS			-20	-100	-20	-100		
I_{CC}	Supply current		$V_{CC} = \text{MAX},$ See Note 2	Condition 1	13	25	13	25	mA	
				Condition 2	12	23	12	23		

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

‡ All typical values are at $V_{CC} = 5 \text{ V}, T_A = 25^\circ \text{C}$.

§ Not more than one output should be shorted at a time.

NOTE 2: I_{CC} (condition 1) is measured with inputs 7 and E1 grounded, other inputs and outputs open. I_{CC} (condition 2) is measured with all inputs and outputs open.

TTL Devices

SN54LS348, SN74LS348 (TIM9908)

8-LINE TO 3-LINE PRIORITY ENCODERS WITH 3-STATE OUTPUTS

switching characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER†	FROM (INPUT)	TO (OUTPUT)	WAVEFORM	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{PLH}	1 thru 7	A0, A1, or A2	In-phase output	C _L = 45 pF, R _L = 667 Ω, See Note 3	11	17	ns	
					20	30		
t _{PHL}	1 thru 7	A0, A1, or A2	Out-of-phase output		23	35	ns	
					23	35		
t _{PZH}	E1	A0, A1, or A2			25	39	ns	
t _{PZL}					24	41		
t _{PLH}	0 thru 7	EO	Out-of-phase output	C _L = 15 pF R _L = 2 kΩ, See Note 3	11	18	ns	
t _{PHL}					26	40		
t _{PLH}	0 thru 7	GS	In-phase output		38	55	ns	
t _{PHL}					9	21		
t _{PLH}	E1	GS	In-phase output		11	17	ns	
t _{PHL}					14	36		
t _{PLH}	E1	EO	In-phase output	17	26	ns		
t _{PHL}				25	40			
t _{PHZ}	E1	A0, A1, or A2		C _L = 5 pF R _L = 667 Ω	18	27	ns	
t _{PLZ}					23	35		

2

TTL Devices

- † t_{PLH} = propagation delay time, low-to-high-level output
 - t_{PHL} = propagation delay time, high-to-low-level output
 - t_{PZH} = output enable time to high level
 - t_{PZL} = output enable time to low level
 - t_{PHZ} = output disable time from high level
 - t_{PLZ} = output disable time from low level
- NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

TYPICAL APPLICATION DATA

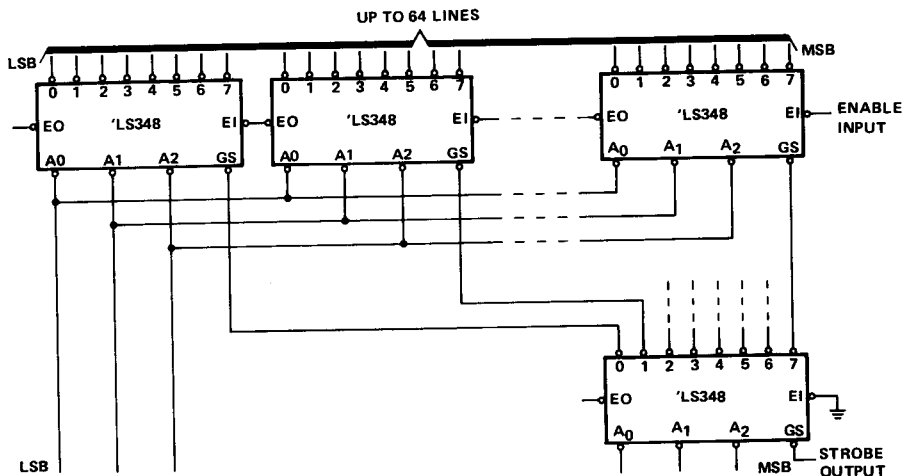


FIGURE 1—PRIORITY ENCODER WITH UP TO 64 INPUTS.