



**SPECIFICATIONS**

Voltage rating: 250VAC  
 Current rating: See chart  
 Contact material: Brass pins  
 Contact plating: Tin  
 Contact resistance: 10 milliohms max.  
 Body material: Nylon, UL94V-0, black  
 Insulation resistance: 100 megohms min.  
 Withstanding: 1,500 VAC for 1 min.  
 Pin dimensions: .025" (0.64mm) square  
 Temperature rise: 30°C max.

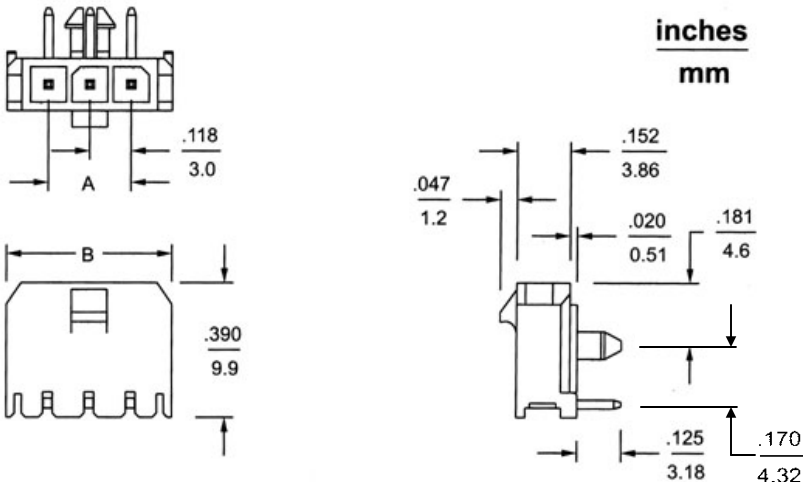


Dimensional Information - in. (mm)			
Pos.	Dim. A	Dim. B	Dim. C
2	0.118 ( 3.0)	0.354 ( 9.0)	
3	0.236 ( 6.0)	0.472 (12.0)	
4	0.354 ( 9.0)	0.591 (15.0)	0.185 ( 4.7)
5	0.472 (12.0)	0.709 (18.0)	0.303 ( 7.7)
6	0.591 (15.0)	0.827 (21.0)	0.421 (10.7)
7	0.709 (18.0)	0.945 (24.0)	0.539 (13.7)
8	0.827 (21.0)	1.063 (27.0)	0.657 (16.7)
9	0.945 (24.0)	1.181 (30.0)	0.776 (19.7)
10	1.063 (27.0)	1.299 (33.0)	0.894 (22.7)
11	1.181 (30.0)	1.417 (36.0)	1.012 (25.7)
12	1.299 (33.0)	1.535 (39.0)	1.130 (28.7)


**2 circuit**



**3 circuit**

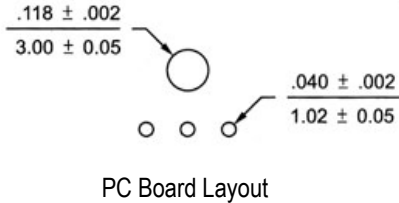

**4 ~ 12 circuit**

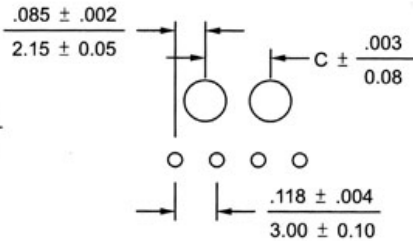

Surface Mount Available

RoHS compliant

Series	Type	Size
JS-A	3046	XXS
Pluggable connector	3046 series .118" (3.0mm) wire-to-board header	XX=2-12 circuits

Rev.	Description	Date	Approved	Drawing	Name	Date
A	DIM	05/28/10	Tom	Approved	Howard	08/10/99
				Checked	Lizzy	08/10/99
				Drawn	Tina	08/10/99
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3046-XXS**

Description: Header, .118" (3.0mm) pitch, single row, wire-to-board, right angle