

ADSL-Transformer WSL-A32.327

Specifications



Application

Analog Devices AD20MSP910 Chipset

Safety Agency

UL1950, EN60950

Features

Optimized magnetic shielding for low interference
High performance, high quality design
SMT and THT package available

Packaging

100 pcs./tray
7 trays/carton

Solderability

270 - 300°C


Isolation voltage

1875 VAC

Operation Temperature Range

-40°C to +85°C



Marking

 article-no.

Unit Weight

7g

Schematics & Mechanicals (mm)



BLACK DOT IS PIN NO.1



WebLinks

Data Sheet

www.wickmann.com/products/WSL_A32327.pdf

Packaging

www.wickmann.com/pack

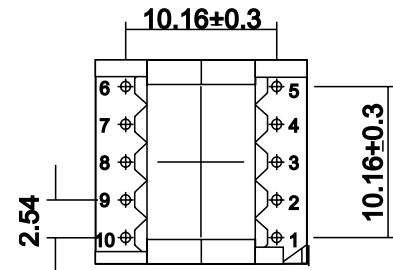

DC Resistance:	1,1 Ω (10-8) max. ±10%
	1,29 Ω (1-3) max. ±10%
	1,29 Ω (2-4) max. ±10%
	1,5 Ω (9-7) max. ±10%
Open Circuit Inductance:	5.0mH ±10% @ 10kHz, 100mVAC, (1-4), short (2+3)
Turns Ratio:	1:1 ± 1%, (10-8):(9-7)
	1:1 ± 1%, (10-7):(1-4)
Leakage Inductance:	16µH max.@ 100kHz, 10mVAC, (1-4), short (2+3, 8+9, 7+10)
Interwinding Capacity:	-
Insertion Loss:	0,5dB max @ 100kHz
Total Harmonic Distortion (THD):	-

Order Information

Qty.	Order Number
	960 4 632327 9