

RED IS ORIGINAL

DISK # DWG SIZE
 NO C

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION.

REV		EO	DESCRIPTION	DWN	APPROVED	DATE
F		10061	PICTORIALLY CHANGED 1.00 FLARED SEALING SLEEVE TO A STRAIGHT (1.25) LONG SEALING SLEEVE; GENERAL UPDATE	DKC	<i>alg</i> FR	12/15/72

DASH NO	MODEL NO	FIG NO
-1	PL455ACFL	1
-2	PL455ACP	2
-3	PL455ACR	3
-4	PL455ACW	4


CABLE GROUP NO	CABLES ACCOMMODATED	ASSEMBLY PER
-201	M17-178-00002	TAI-162
-202	TWC-78-1, TROMPETER	
-203	TWC-124-1A, TROMPETER	
-204	1D902, RAYCHEM	
-205	TWAC-78-1F2, TROMPETER	
-206	7826D0130, RAYCHEM	
-208	202-3927, MICRODOT	
-209	202-3942, MICRODOT	
-212	2524E0114, RAYCHEM	
-217	GC875TM24H, BRUMMAN	
-218	EPD221888, RAYCHEM	
-219	2526D1114, RAYCHEM	
-220	GC875RR1, BRUMMAN	
-221	10614, RAYCHEM	
-222	10613, RAYCHEM	
-223	HMS2-1149, HUGHES	

INCH	MM
.005	0.13
.030	0.76
.062	1.57
.067	1.70
.080	2.03
.334	8.48
.500	12.70
1.25	31.75
1.46	37.08


△ THE ONE WIDE (.080) SLOT LOCATION IS SHOWN BY A GREEN ASTERISK ON THE O.D. OF THE BAYONET SLEEVE GUARD-RING FOR -3 AND SUBSEQUENT DASH NUMBERS

△ CRIMP BUSHING AND SEALING SLEEVE SUPPLIED LOOSE WITH EACH BODY ASSY

4. EXAMPLE OF COMPLETE MODEL NO:

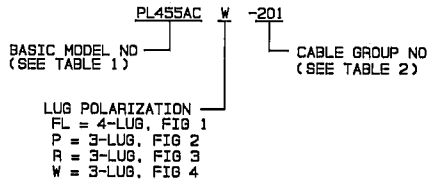

3. EXAMPLE OF COMPLETE PART NO:



2. FINISH: TFS-1U (500 HOURS SALT SPRAY; NICKEL)

1. ALL DIM ARE IN INCHES

FIG 1




FIG 2




FIG 3







FIG 4

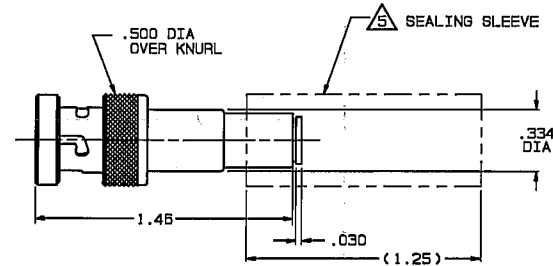

-1-202 SHOWN



-3-221 SHOWN

QTY	DESCRIPTION	PART NUMBER	ITEM
TOL UNLESS SPECIFIED .XX ± .05 .XXX ± .005 ANGLE: 0° 30'	TROMPETER ELECTRONICS, INC.	PL455ACFL/P/R/W BODY ASSY	
DWN DKC 12-8-92 CHK <i>alg</i> 12/14/92	MATERIAL	CODE IDENT 14949	DRAWING NO. 8-2583
310-0064 ENGR			REV F
NEXT ASSY	APPR <i>FR</i> 12/15/72	SCALE 2/1	DATE 10-16-87 SHEET 1 OF 2