

Microminiature Rotary Coded Switches




Specifications:

Contact rating:	50 V DC, 100 mA, non-switching 5 V DC, 100 mA, switching
Contact resistance:	< 200 mΩ
Insulation resistance:	> 1000 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	- 25° to + 75° C
Mechanical life:	minimum 10 000 operations
Contacts:	gold-plated
Terminals:	PC terminals, phosphor bronze, gold-plated
Case material:	thermoplastic; rotor: standard types ivory; inverse types red
Construction:	case totally sealed, suitable for washing by immersion
Mounting:	on pc-board
Soldering conditions:	auto-soldering – max.: 3 sec, 250° C

washable

Models:	Code
DRS 13010	BCD
DRS 13110	BCD Inverse
DRS 13016	Hexadecimal
DRS 13116	Hexadecimal Inverse

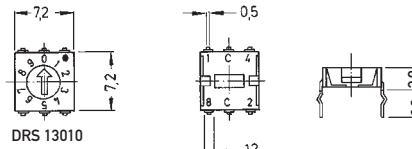

DRS 14010	BCD
DRS 14110	BCD Inverse
DRS 14016	Hexadecimal
DRS 14116	Hexadecimal Inverse

