



TYPES YDS-RL & YDS-LT (CONTINUED)

UNISPLICE™

FULL TENSION SLEEVE
FOR ACSR ALL ALUMINUM,
5005, 6201, COMPRESSED
CONDUCTORS.

CATALOG NUMBER	CONDUCTOR	CODE	L	DIE INDEX	TOOLS, DIE SET CATALOG NO., & CRIMPS PER END			
					MD6	Y35, Y750 Y45†, Y46‡	Y48B	Y60BHU
YDS30LT	312.8 6201	BUTTE		317		U317	C317	L317
YDS32LT	394.5 6201 394.5 5005 (336.4 E.C. EQUIV.)	CANTON RADIAN	14-1/2	642	—	U642 12	C642 4	L642 4
YDS341RL	397.5 ACSR (18-1) 419.6 5005	REDE	22	327	—	U327 18	—	—
YDS36IRL	477 (18-1) 556.5 (18-1) 587.2 5005	RUBLE	23-1/4	788 720	—	U-788 CRIMPS OVERLAP	—	L720 CRIMPS OVERLAP
YDS36LT	559.5 6201 559.5 5005 (477 E.C. EQUIV.)	DARIEN REMEX	16	667	—	P667**	C667 CRIMPS OVERALP	L667 CRIMPS OVERALP
YDS45LT	927.2 6201 927.2 5005 (795 E.C. EQUIV.)	GREELEY SOLAR	21-3/8	648	—	—	—	L648 7


** Y46 HYPRESS™ only.

E-65

TYPES YDS-A & YDS-AT

HYSPLICE™

FULL TENSION SLEEVE
FOR ALUMINUM (INSTALLED
WITH BURNDY OR EEI DIES)

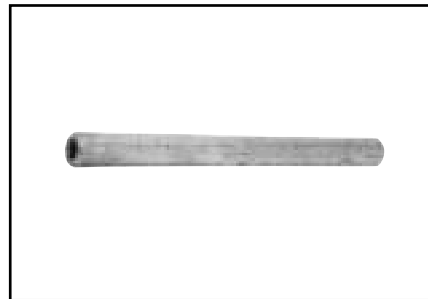

Full-tension HYSPLICE™ sleeve made of aluminum and with cable stop. Designed to be installed with Burndy or EEI dies. BURNDY and EEI die index numbers clearly marked on sleeve. Sizes 1/0 and larger tapered for gradual transition of stress. Pre-filled with PENETROX® joint compound and capped.

CATALOG NUMBER	CONDUCTOR	L	EEI DIE INDEX	INDEX	TOOLS, DIE SET CATALOG NO., & CRIMPS PER END	
					MD6	Y35, Y750, Y45†, Y46‡
YDS2CA	2 (7)	3-7/8	6A	693	W693 8	U693 2
YDS25AT	1/0 (7)	7-1/4	8A	243	W243 12	U243 3
YDS27AT	3/0 (7, 19)	7-1/4	10A	694	W694 8	U694 4
YDS28AT	4/0 (7, 19)	10-1/2	11A	249	W249 12	U249 6
YDS311AT	397.5 (19)	12-1/4	13A	655	-	U655 10
YDS331AT	477 (19)	12-3/4	14A	317	-	U317 9

† U Die with adapter PT-6515.

‡ U Die with adapter PUADP-1.