

14 Pin DIP ACMOS Clock Oscillator Series

CONNOR WINFIELD




2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com

US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Description:

The Connor-Winfield's AC5xG series are 14 Pin DIP, 5.0V ACMOS Output logic, fixed frequency Crystal Oscillator (XO) designed for applications requiring high frequency precision clocks with ± 24 mA output drive capability.



Features:

5.0 Vdc Operation
Frequency Stability:
AC51G ± 25 ppm
AC52G ± 50 ppm
AC53G ± 100 ppm
AC54G ± 20 ppm
Temperature Range: 0 to 70°C
ACMOS Output Logic
14 Pin DIP Through Hole Package
RoHS Compliant / Lead Free

Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	125	°C	
Supply Voltage (Vcc)	-0.5	-	7.0	Vdc	

Model Specifications

Model	Frequency Tolerance	Minimum	Nominal	Maximum	Units	Notes
Model AC51G						
	Frequency Tolerance	-25	-	25	ppm	1
Model AC52G						
	Frequency Tolerance	-50	-	50	ppm	1
Model AC53G						
	Frequency Tolerance	-100	-	100	ppm	1
Model AC54G						
	Frequency Tolerance	-20	-	20	ppm	1

Operating Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Frequency Range(Fo)	10.0	-	150	MHz	
Operating Temp Range	0	-	70	°C	
Supply Voltage (Vcc)	4.75	5.0	5.25	Vdc	
Supply Current (Icc)	-	-	100	mA	
Period Jitter	-	3	5	ps rms	
Integrated Phase Jitter	-	0.3	1.0	ps rms	
SSB Phase Noise at 10Hz offset	-	-40	-	dBc/Hz	
SSB Phase Noise at 100Hz offset	-	-85	-	dBc/Hz	
SSB Phase Noise at 1KHz offset	-	-120	-	dBc/Hz	
SSB Phase Noise at 10KHz offset	-	-140	-	dBc/Hz	
SSB Phase Noise at 100KHz offset	-	-145	-	dBc/Hz	
SSB Phase Noise at 1MHz offset	-	-145	-	dBc/Hz	
Start Up Time	-	-	10	ms	

ACMOS Output Characteristics

Parameter	Minimum	Nominal	Maximum	Units	Notes
Load	-	50	-	pF	
Voltage High (Voh)	4.4	-	-	V	
Voltage Low (Vol)	-	-	0.44	V	
Current High (Ioh)	-	-	-24	mA	
Current Low (Iol)	24	-	-	mA	
Duty Cycle at 50% of Vcc	45	50	55	%	
Rise / Fall Time:	-	-	1	ns	2

Package Characteristics

Package Hermetically sealed 14 Pin DIP metal package with case ground.

Notes:

- Includes calibration @ 25°C, frequency stability vs. change in temperature, supply voltage and load variations, shock and vibration and 10 years aging.
- Measured from 0.5 to 2.4 V.

Warning:


Do not insert oscillator into a hot circuit. Failure to comply will damage the oscillator.




Bulletin **AC120**
Page **1 of 2**
Revision **00**
Date **24 Feb 2010**




Test Circuit

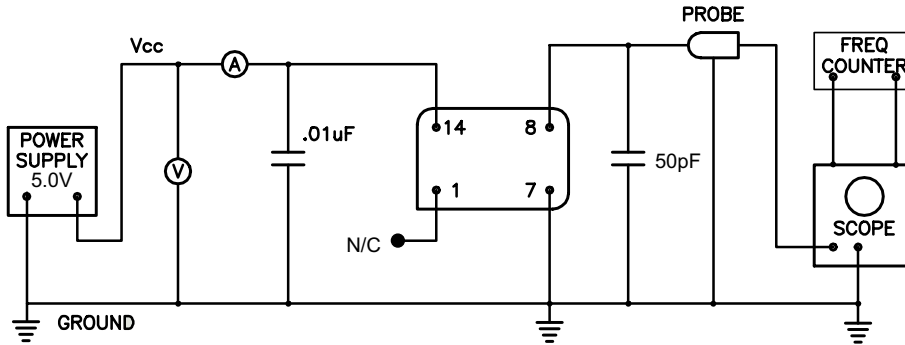

Output Waveform

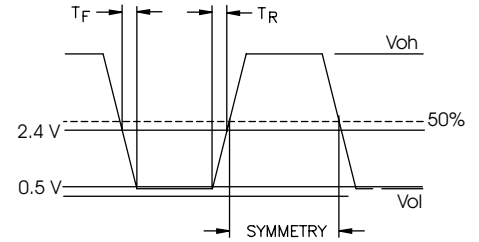


Package Layout

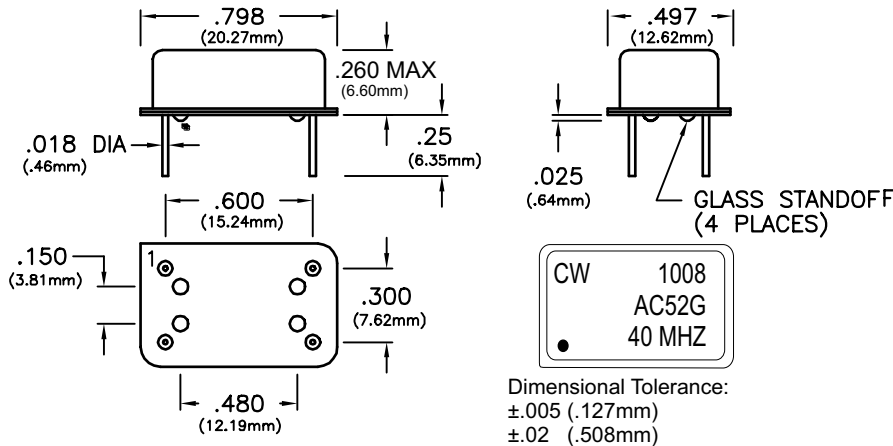

Pin Connections

- 1: N/C
- 7: Ground
- 8: Output
- 14: Supply Voltage (Vcc)

Solder Profile



Ordering Information

AC	5	2	G	040.0M
Type: Clock Oscillator ACMOS, 5.0 Vdc 14 Pin DIP Package	Temperature Range 5 = 0 to 70°C	Frequency Stability 1 = ±25 ppm 2 = ±50 ppm 3 = ±100 ppm 4 = ±20 ppm	RoHS Compliant	Output Frequency - Frequency Format -xxx.xM Min. * -xxx.xxxxxM Max.* * Amount of numbers after the decimal point. M = MHz

Example:

AC52G-040.0M = 14 Pin DIP, ACMOS, Clock, 5.0Vdc, 0 to 70°C, ±50ppm, Output Frequency 40.0MHz
 To order an AC52 with an output frequency of: 12.8 MHz = AC52G-012.8M
 44.736 MHz = AC52G-044.736M
 150. MHz = AC52G-150.0M

Bulletin	AC120
Page	2 of 2
Revision	00
Date	24 Feb 2010