

Hex 2-input OR drivers

74F832/74F1832

FEATURES

- High capacitive drive capability
- Choice of configuration
Corner V_{CC} and GND - 74F832
Center V_{CC} and GND - 74F1832
- Typical propagation delay of 3.5ns
- Superior ground noise characteristics (implemented using output edge rate control)
- Increased source and sink current (64mA)

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT (TOTAL)
74F832	3.5ns	26mA
74F1832	3.5ns	26mA

ORDERING INFORMATION


DESCRIPTION	ORDER CODE
	COMMERCIAL RANGE
20-pin plastic DIP	N74F832N, N74F1832N
20-pin plastic SOL	N74F832D, N74F1832D

INPUT AND OUTPUT LOADING AND FAN OUT TABLE


PINS	DESCRIPTION	74F (U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
D _{na} – D _{nb}	Data inputs	1.0/0.033	20µA/20µA
Q ₀ – Q ₅	Data outputs	3200/106.7	64mA/64mA

NOTE: One (1.0) FAST unit load is defined as: 20µA in the high state and 0.6mA in the low state.


PIN CONFIGURATION

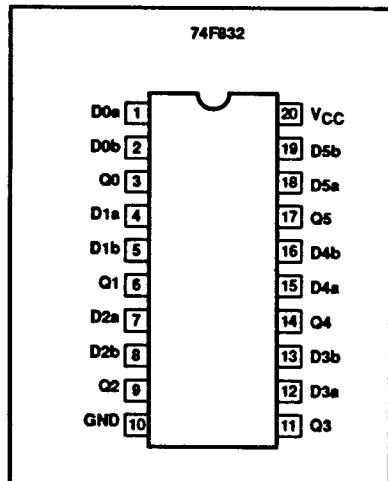


LOGIC SYMBOL

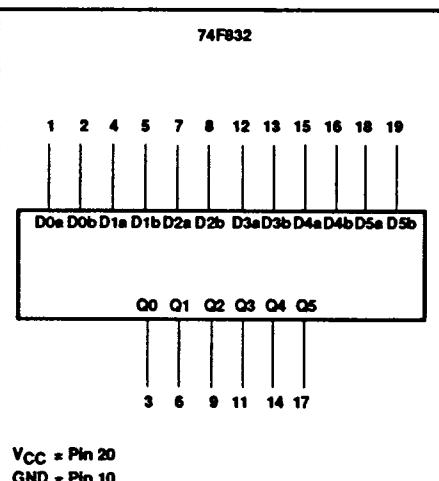


IEC/IEEE SYMBOL

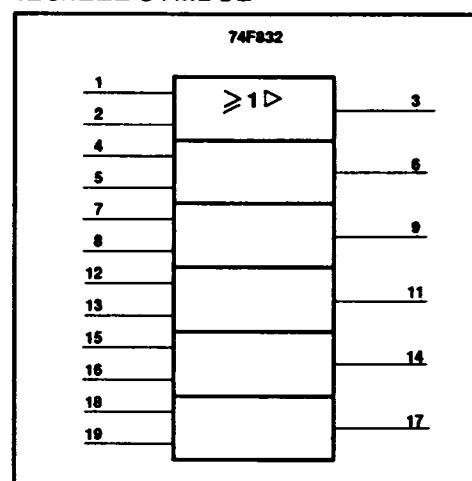


PIN CONFIGURATION

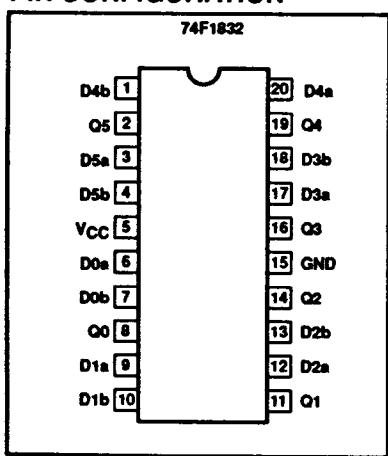

LOGIC SYMBOL

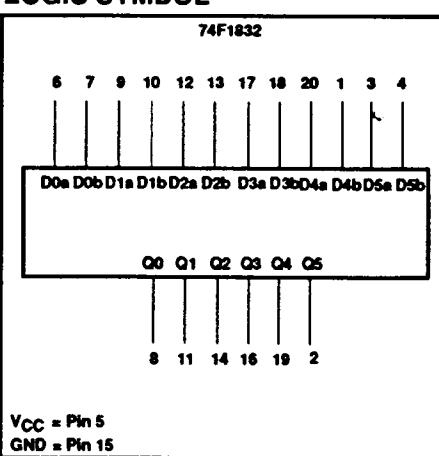


IEC/IEEE SYMBOL

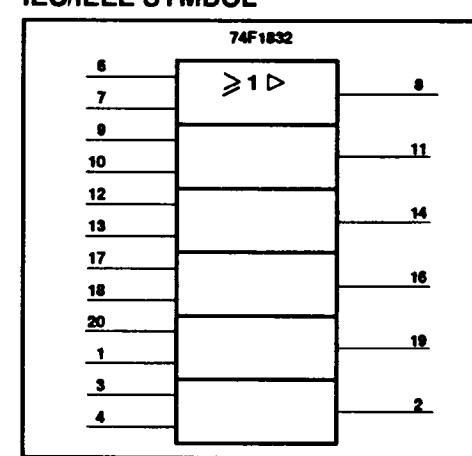

Hex 2-input OR drivers

74F832/74F1832

LOGIC DIAGRAM

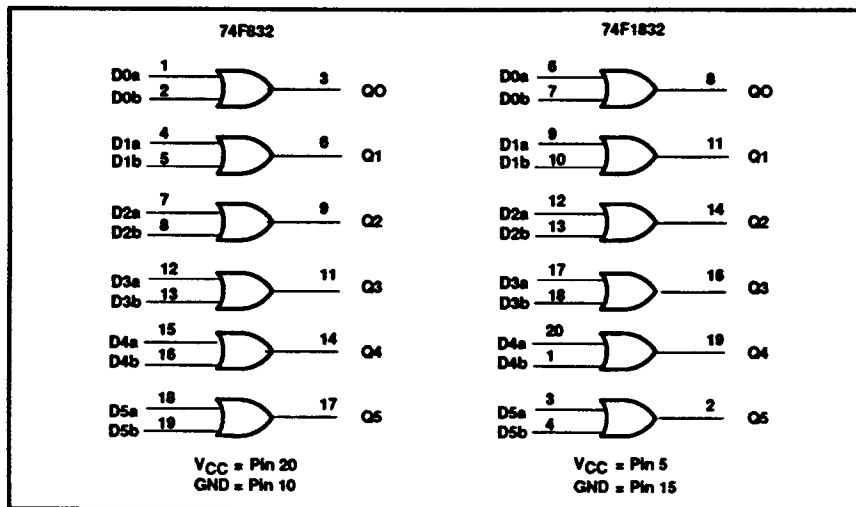

FUNCTION TABLE

INPUTS		OUTPUT
D _{na}	D _{nb}	Q _n
H	X	H
X	H	H
L	L	L

NOTES:

1. H = High voltage level
2. L = Low voltage level
3. X = Don't care

ABSOLUTE MAXIMUM RATINGS

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

SYMBOL	PARAMETER	RATING			UNIT
		MIN	NOM	MAX	
V _{CC}	Supply voltage	-0.5 to +7.0			V
V _{IN}	Input voltage	-0.5 to +7.0			V
I _{IN}	Input current	-30 to +5			mA
V _{OUT}	Voltage applied to output in high output state	-0.5 to V _{CC}			V
I _{OUT}	Current applied to output in low output state		96		mA
T _{amb}	Operating free-air temperature range	0 to +70			°C
T _{stg}	Storage temperature range	-65 to +150			°C

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIMITS			UNIT
		MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5.0	5.5	V
V _{IH}	High-level input voltage	2.0			V
V _{IL}	Low-level input voltage			0.8	V
I _{IK}	Input clamp current			-18	mA
I _{OH}	High-level output current			-64	mA
I _{OL}	Low-level output current			64	mA
T _{amb}	Operating free air temperature range	0		+70	°C

Hex 2-input OR drivers

74F832/74F1832

DC ELECTRICAL CHARACTERISTICS

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS ¹		LIMITS			UNIT
				MIN	TYP ²	MAX	
V_{OH}	High-level output voltage	$V_{CC} = \text{MIN}$, $V_{IL} = \text{MAX}$	$\pm 10\%V_{CC}$	2.0			V
			$\pm 5\%V_{CC}$	2.0			
V_{OL}	Low-level output voltage	$V_{CC} = \text{MIN}$, $V_{IL} = \text{MAX}$	$\pm 10\%V_{CC}$		0.38	0.55	V
			$\pm 5\%V_{CC}$		0.38	0.55	
V_{IK}	Input clamp voltage	$V_{CC} = \text{MIN}$, $I_I = I_K$			-0.73	-1.2	V
I_I	Input current at maximum input voltage	$V_{CC} = \text{MAX}$, $V_I = 7.0V$				100	μA
I_{IH}	High-level input current	$V_{CC} = \text{MAX}$, $V_I = 2.7V$				20	μA
I_{IL}	Low-level input current	$V_{CC} = \text{MAX}$, $V_I = 0.5V$				-20	μA
I_O	Output current ³	$V_{CC} = \text{MAX}$		-60		-180	mA
I_{CC}	Supply current (total)	$V_{CC} = \text{MAX}$	$V_{IN} = \text{GND}$		21	30	mA
			$V_{IN} = 4.5V$		31	44	mA

NOTES:

6. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
7. All typical values are at $V_{CC} = 5V$, $T_{amb} = 25^\circ C$.
8. The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I_{OS} .

AC ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	LIMITS			UNIT	
			$T_{amb} = +25^\circ C$		$T_{amb} = 0^\circ C \text{ to } +70^\circ C$		
			$V_{CC} = +5.0V$	$C_L = 50pF$	$V_{CC} = +5.0V \pm 10\%$		
			MIN	TYP	MAX		
t_{PLH}	Propagation delay $D_{Na}, D_{Nb} \text{ to } Q_n$	Waveform 1	2.0 2.0	4.0 3.5	6.0 6.0	2.0 1.5	6.5 6.5
$t_{sk(0)}$	Output skew ^{1,2}	Waveform 2			2.0		2.5


NOTES:

1. $|t_{PN} \text{ actual} - t_{PM} \text{ actual}|$ for any output compared to any other output where N and M are either LH or HL.
2. Skew times are valid only under same test conditions (temperature, V_{CC} , loading, etc.).


Hex 2-input OR drivers

74F832/74F1832

AC WAVEFORMS

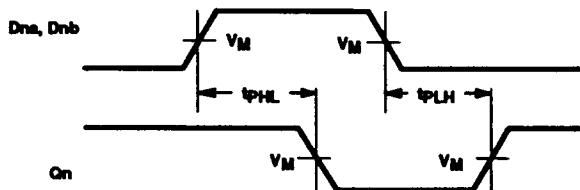


Waveform 1. Propagation delay for inverting output

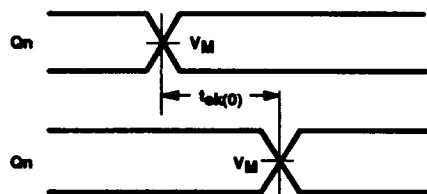


Waveform 2. Output skew

NOTE: For all waveforms, $V_M = 1.5V$.

TEST CIRCUIT AND WAVEFORMS

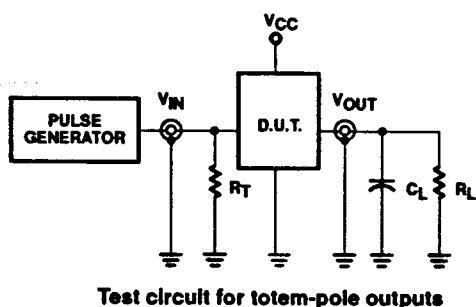

Test circuit for totem-pole outputs

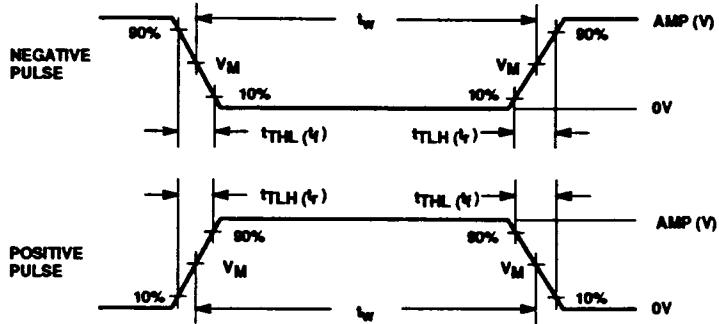

Input pulse definition

family	INPUT PULSE REQUIREMENTS					
	amplitude	V_M	rep. rate	t_w	t_{TLH}	t_{THL}
74F	3.0V	1.5V	1MHz	500ns	2.5ns	2.5ns

DEFINITIONS:

 R_L = Load resistor;

see AC electrical characteristics for value.

 C_L = Load capacitance includes jig and probe capacitance;
see AC electrical characteristics for value. R_T = Termination resistance should be equal to Z_{out} of
pulse generators.