

1 2 3 4 5 6 7 8 9 10 11 12

REV	MODIFICATION	DRAWN	APPROVED
B	EN051804		








NOTES:
 1. MATERIAL :
 INSULATOR : HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING : UL94-V0
 COLOR : BLACK
 CONTACT : COPPER ALLOY

2. PART NO :
 SC30 X X - X 0 - 2 X 0 0

CONNECTOR TYPE:
 0 - CONNECTOR ASSY WITH UPPER COVER AND MIDDLE PLATE.
 2 - UPPER COVER ASSY WITH MIDDLE PLATE.
 3 - UPPER COVER SEMI-ASSY WITH MIDDLE PLATE.
 4 - UPPER COVER WITH MIDDLE PLATE SEPARATED.

TIN/LEAD PLATING:
 0 - GOLD FLASH
 3 - 15u" GOLD
 5 - 30u" GOLD
 UNLEAD PLATING:
 A - GOLD FLASH
 C - 15u" GOLD
 E - 30u" GOLD

PIN NO:
 050 - 50PIN CONNECTOR
 068 - 68PIN CONNECTOR

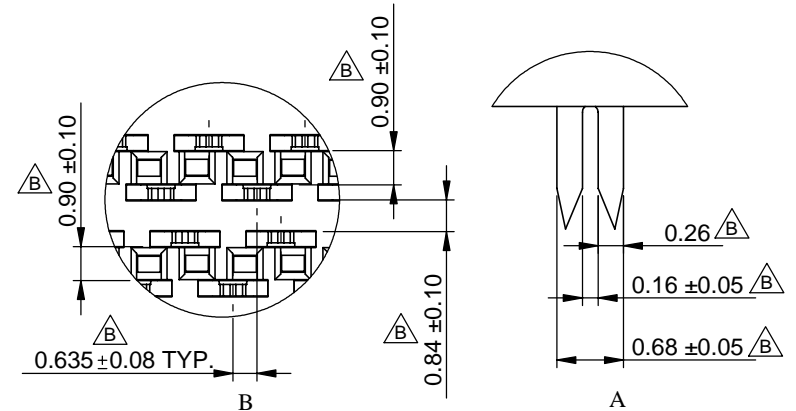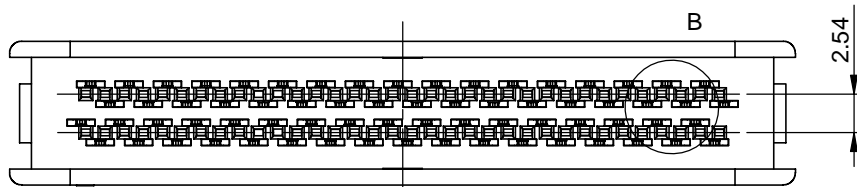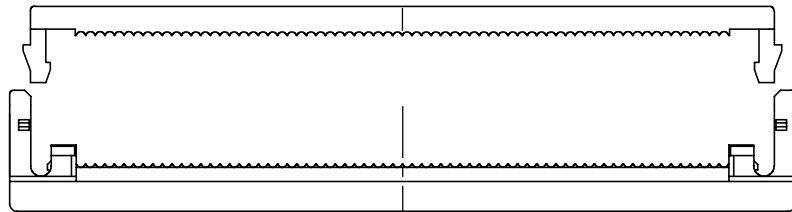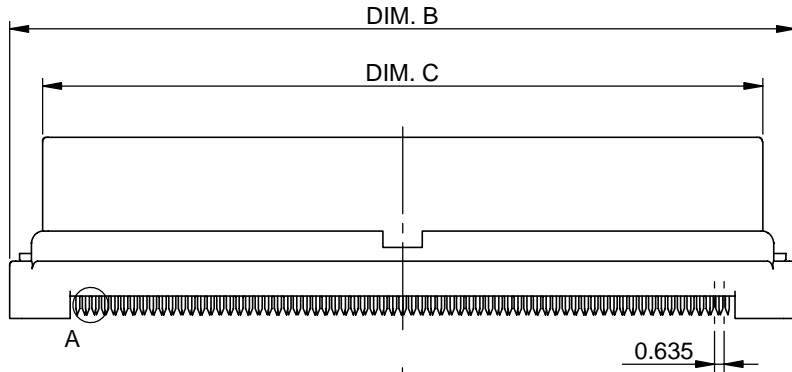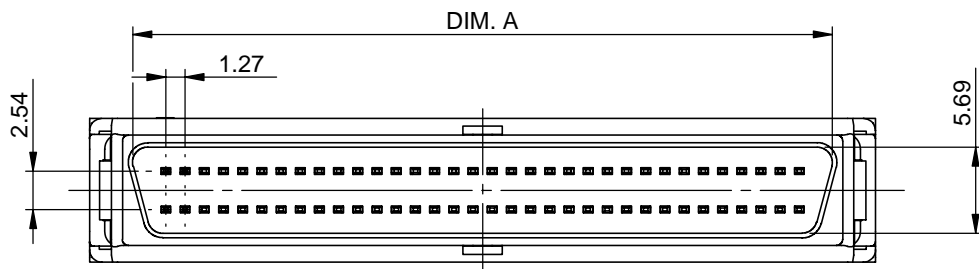

NO. OF Pos	DIM. A	DIM. B	DIM. C
50PIN	34.85	40.57	36.22
68PIN	46.28	52.00	47.65

GENERAL TOLERANCE	
X. ± 0.40	X. ° ± 5°
.X ± 0.30	.X ° ± 2°
.XX ± 0.20	.XX ° ± 1°
.XXX ± 0.10	.XXX ° ± 0.5°

Proconn Technology Co.,Ltd.

TITLE **SCSI-III I.D.C TYPE CONNECTOR (FOR 3 PARTS)**

UNIT mm	PART NO. SC30XX-X0-2X00	DWG NO. SC30XX-02-B1
APPROVAL	CHECKED	DRAWN
		SCALE NONE SHEET 1 / 1
		PROJ. REV. B

1 2 3 4 5 6 7 8 9 10 11 12 QP-04-04-B