

April 1998




DM74LS28 Quad 2-Input NOR Buffer

General Description

The 'LS28 contains four independent gates each of which perform the logic NOR function.

Connection Diagram

Dual-In-Line Package

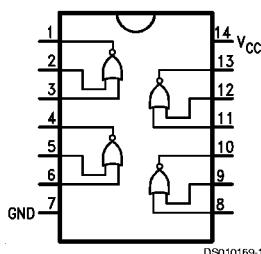

Order Number DM74LS28M or DM74LS28N
See Package Number M14A or N14A

Truth Table

$$Y = \overline{A+B}$$

Inputs		Output
A	B	Y
L	L	H
L	H	L
H	L	L
H	H	L

H = High logic level

L = Low logic level

Absolute Maximum Ratings (Note 1)

Supply Voltage	7V	Operating Free Air Temperature Range	0°C to +70°C
Input Voltage	7V	Storage Temperature Range	-65°C to +150°C

Recommended Operating Conditions

Symbol	Parameter	Min	Nom	Max	Units
V_{CC}	Supply Voltage	4.75	5	5.25	V
V_{IH}	High Level Input Voltage	2			V
V_{IL}	Low Level Input Voltage			0.7	V
I_{OH}	High Level Output Current			-1.2	mA
I_{OL}	Low Level Output Current			24	mA
T_A	Free Air Operating Temperature	0		70	°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 2)	Max	Units
V_I	Input Clamp Voltage	$V_{CC} = \text{Min}$, $I_I = -18 \text{ mA}$			-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}$, $I_{OH} = \text{Max}$, $V_{IL} = \text{Max}$	2.7			V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}$, $I_{OL} = \text{Max}$, $V_{IH} = \text{Min}$		0.5		V
		$I_{OL} = 12 \text{ mA}$, $V_{CC} = \text{Min}$		0.4		
I_I	Input Current @ Max Input Voltage	$V_{CC} = \text{Max}$, $V_I = 7V$			0.1	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}$, $V_I = 2.7V$			20	μA
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}$, $V_I = 0.4V$			-0.4	mA
I_{os}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 3)	-30		-130	mA
I_{OCH}	Supply Current with Outputs High	$V_{CC} = \text{Max}$			3.6	mA
I_{OCL}	Supply Current with Outputs Low	$V_{CC} = \text{Max}$			13.8	mA

Note 2: All typicals are at $V_{CC} = 5V$, $T_A = 25^\circ\text{C}$.



Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Switching Characteristics



$V_{CC} = +5.0V$, $T_A = +25^\circ\text{C}$

Symbol	Parameter	$R_L = 2 \text{ k}\Omega$ $C_L = 15 \text{ pF}$		Units
		Min	Max	
t_{PLH}	Propagation Delay Time Low to High Level Output		20	ns
t_{PHL}	Propagation Delay Time High to Low Level Output		20	ns

Physical Dimensions inches (millimeters) unless otherwise noted

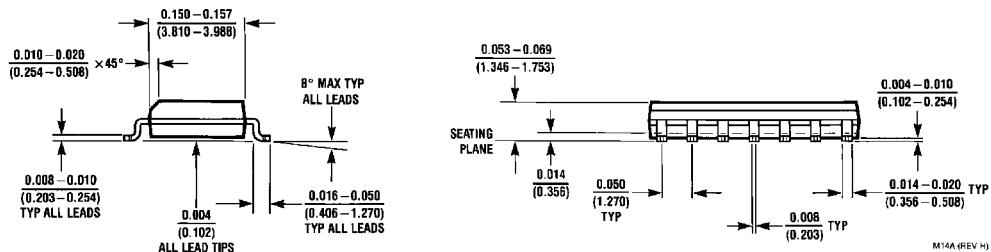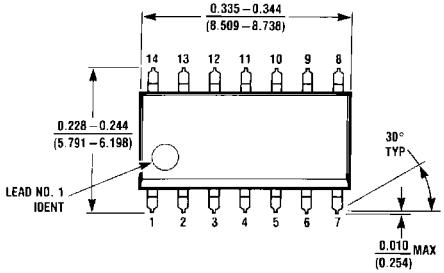

14-Lead Small Outline Molded Package (M)
Order Number DM74LS28M
Package Number M14A

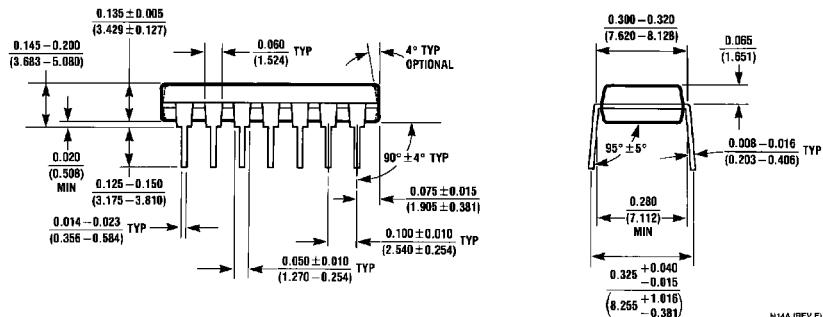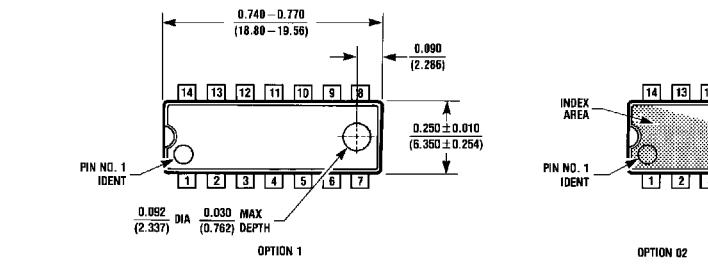

14-Lead Molded Dual-In-Line Package (N)
Order Number DM74LS28N
Package Number N14A