

**DM5000** 50 Low Density Male x  
68 High Density Male


Part Number	Circuit
DM5000 - 5068	- 25 = Regulated High Lines
	- 39 = Open High Lines
	- 47 = 4.7K to Term Power

**Specifications**

**Contact Material:**  
Phosphor bronze, selective gold over nickel plated


**PCB:**  
FLGFN B2B MIL-P-13949, rated UL 94V-0

**Housing Material:**  
Reinforced thermoplastic, rated UL 94V-0

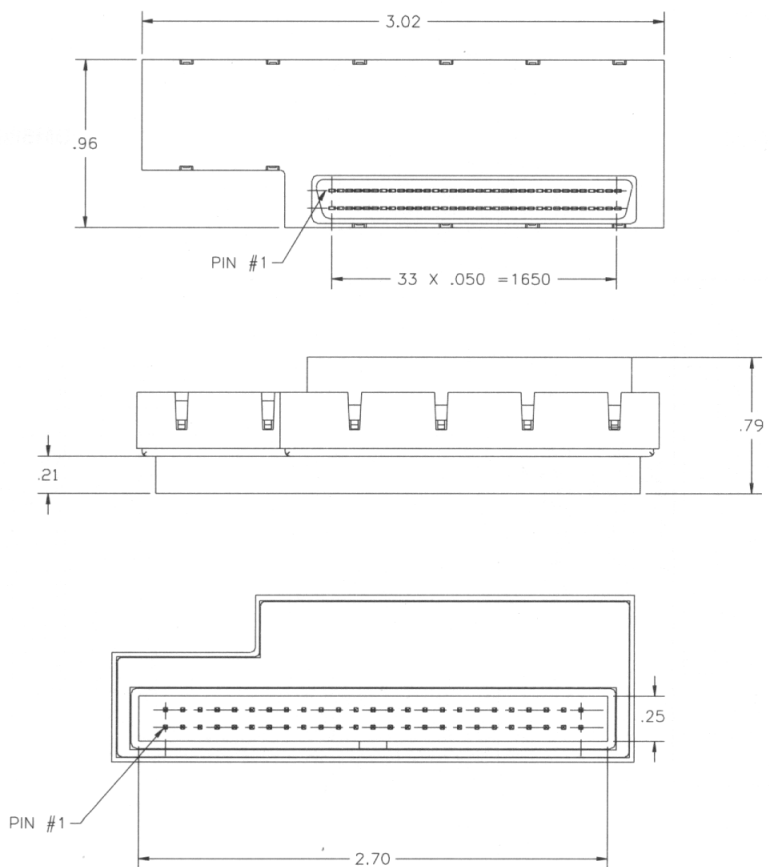


# Schematics

**DM5000-5068-25**

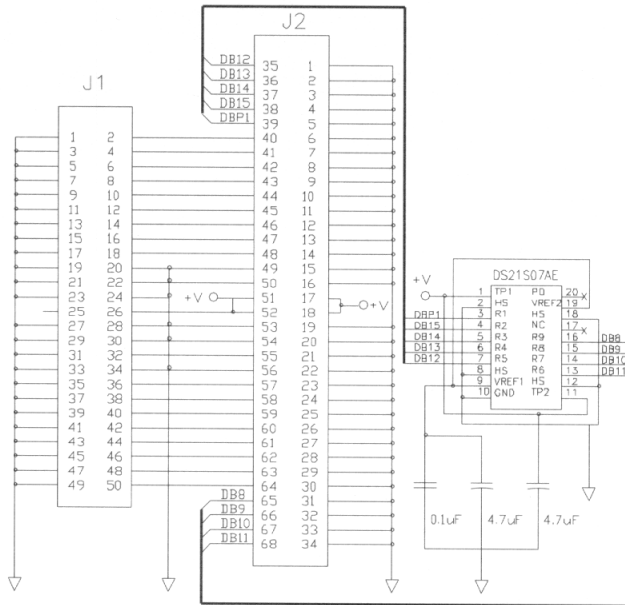


J1 = MALE LOW DENSITY 50 POS.  
J2 = MALE HIGH DENSITY 68 POS.

**DM5000-5068-39**

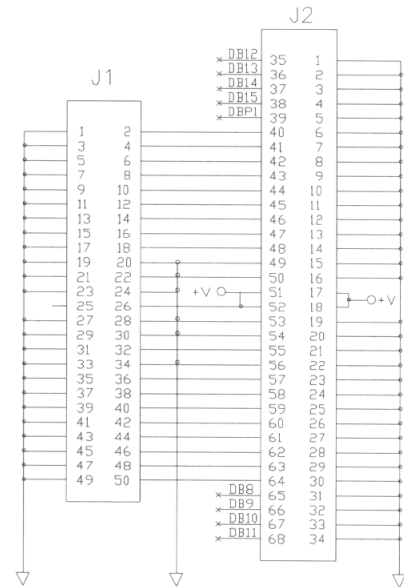

J1 = MALE LOW DENSITY 50 POS.  
J2 = MALE HIGH DENSITY 68 POS.

**DM5000-5068-47**

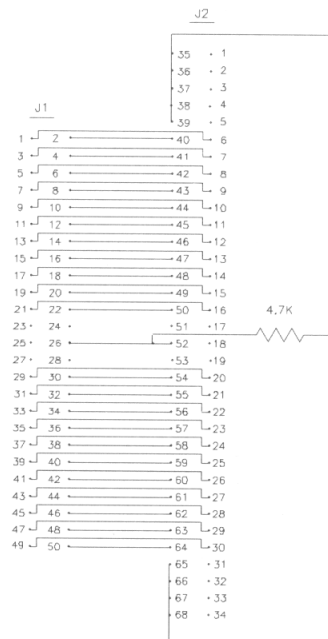

J1 = MALE LOW DENSITY 50 POS.  
J2 = MALE HIGH DENSITY 68 POS.