

Helping Customers Innovate, Improve & Grow



Description

The Holdover Reference Oscillator family is designed specifically to meet the need for a high accuracy cost effective backup reference.

These high stability oscillators will provide consistent, repeatable, extended holdover to the stated phase accuracy - making them ideal for applications where GPS, 1588 or other sources of timing are intermittent or prone to extended periods of unavailability.

Features

- Available in 8 hour and 24 hour version
- Holdover accuracy available to $\leq 8\mu\text{s}$ and $\leq 1\mu\text{s}$
- Specifically designed for inter-operability with existing designs based on conventional OCXO's.
- Advanced digital compensation techniques take place inside the Holdover Reference - no need for programming or other user intervention.

Applications

- Precision Timing Applications in:
 - Wireless Base Stations
 - Wireless Backhaul
 - Digital Video Broadcast
 - Low latency optical networking
 - Power distribution
 - Test and Measurement

Specifications


Parameter	Min	Typical	Max	Units	Condition
Output Frequency	5		20	MHz	
Holdover Accuracy over 8 hours (ordering option)			8.0	μs	15°C range, $V_s \pm 5\%$, Load $\pm 5\%$, after 24 hours of operation
Holdover Accuracy over 8 hours (ordering option)			1.0	μs	15°C range, $V_s \pm 5\%$, Load $\pm 5\%$, after 24 hours of operation
Holdover Accuracy over 24 hours (ordering option)			8.0	μs	15°C range, $V_s \pm 5\%$, Load $\pm 5\%$, after 24 hours of operation
Warm up time			5	minutes	to $\pm 10\text{ppb}$ of final frequency (1 hour reading) @25 °C

Specifications (continued)

Parameter	Min	Typical	Max	Units	Condition
Supply					
Supply voltage	4.75	5	5.25	Vdc	
Power Consumption			3.1	Watts	during warmup
Power Consumption			1.5	Watts	steady state at 25 °C
Output					
Signal	HCMOS				
Load		15		pF	
Signal Level (Vol)			0.5	Vdc	With Vs=5.0 and 15pF load
Signal Level (Voh)	3.5			Vdc	With Vs=5.0 and 15pF load
Duty Cycle	40		60	%	@ (Voh-Vol)/2
Signal	Sine Wave				
Load		50		Ohm	
Output Power @ 5.0V	0	3	6	dBm	50 Ohm Load
Sub Harmonics			-25	dBc	50 Ohm Load
Spurious			-65	dBc	50 Ohm Load
Tuning Range	Fixed OCXO; No adjustment				
Tuning Range	+0.15		+0.4	ppm	
Linearity	10%				
Tuning Slope	Positive				
Control Voltage Range	0	1.65	3.3	Vdc	With Vs = 5.0 Vdc
Phase Noise 1 Hz		-98	-90	dBc/Hz	@10MHz
Phase Noise 10 Hz		-125	-120	dBc/Hz	
Phase Noise 100 Hz		-135	-130	dBc/Hz	
Phase Noise 1kHz		-143	-138	dBc/Hz	
Phase Noise 10kHz		-150	-145	dBc/Hz	
Maximum Ratings					
Maximum supply voltage			6.0	Vdc	
Maximum output load			50	pF	
Operable Temperature Range	-40		85	°C	
Storage Temperature Range	-55		85	°C	
Mechanical					
Weight	16.0			g	
Dimensions	25.8x25.8x15.35			mm	


Typical Performance Data

Holdover Performance - 96 Hours

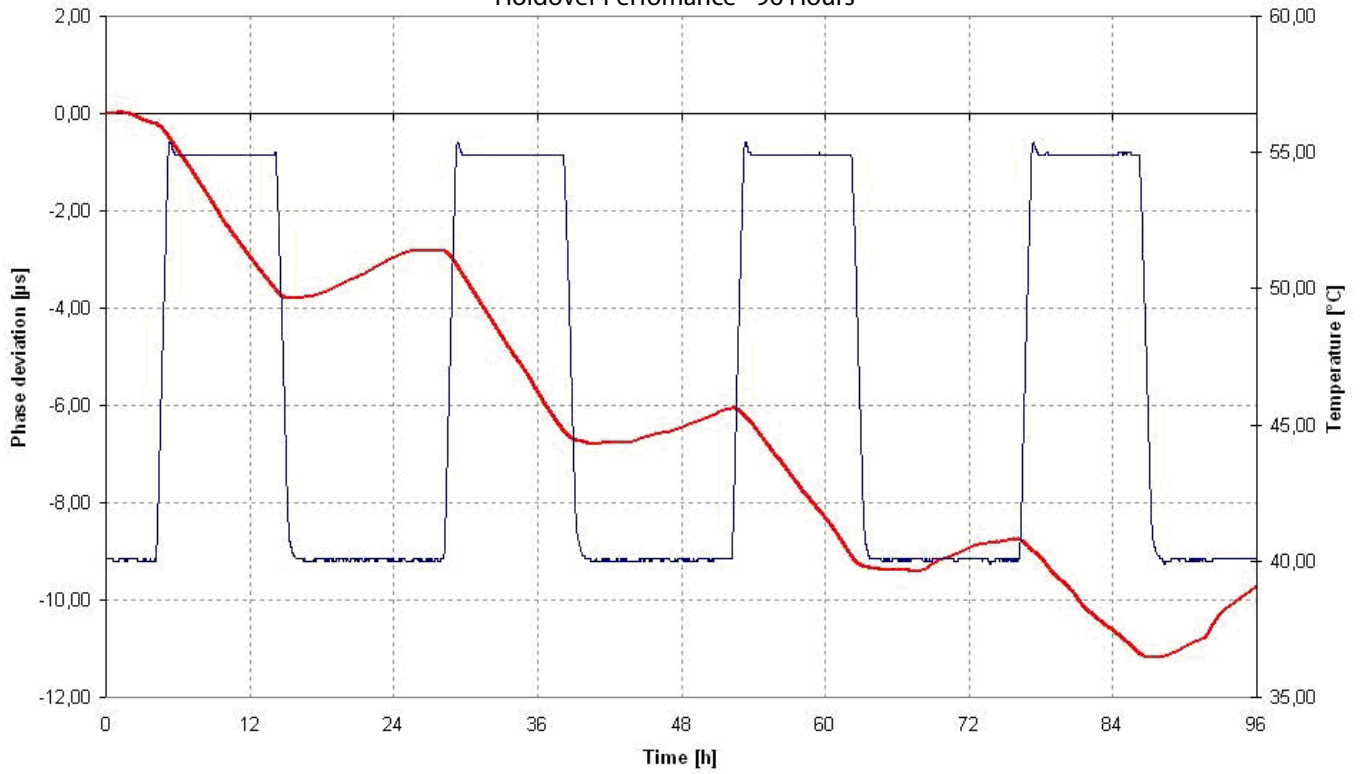


MTIE and TDEV - 0.3mHz loop filter bandwidth


Symmetricon TimeMonitor Analyzer (file=Typ_OX-203-0001-10M00_Tau1s.phd)
 TDEV: No. Avg=1; Fo=10.00 MHz; 8/3/2011 1:33:27 PM
 Stable32 Phase; Samples: 200000

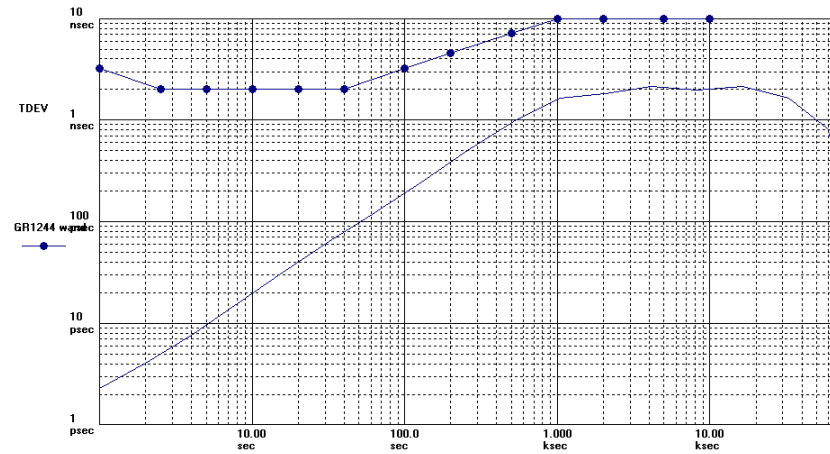

Symmetricon TimeMonitor Analyzer (file=Typ_OX-203-0001-10M00_Tau1s.phd)
 MTIE: Fo=10.00 MHz; Fs=1000.0 mHz; 8/3/2011 1:33:27 PM
 Stable32 Phase; Samples: 200000

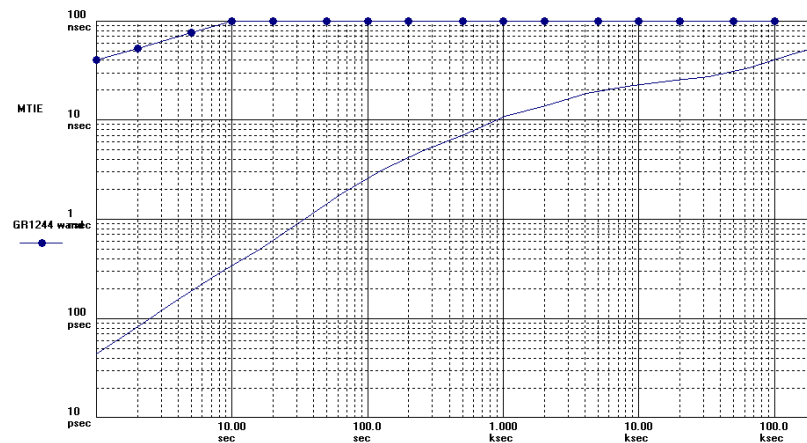

Outline Drawing

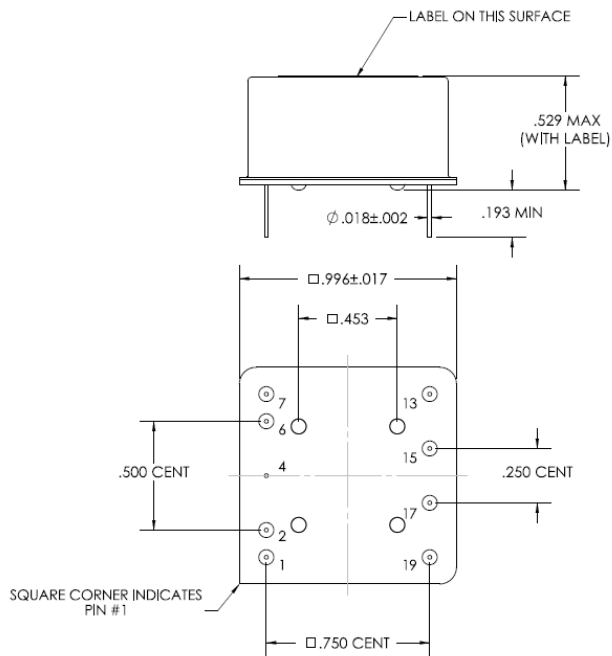

Pin Assignment	
Pin	Connection
1	RF Output
2	Do Not Connect
4	Case Ground
6	Do Not Connect
7	EFC (Frequency Control)
13	Do Not Connect
15	Do Not Connect
17	Do Not Connect
19	Supply Voltage

Ordering Information

OX - 203 1 - D A E - 808 0 - 10M000000

Product

OX: OCXO

Package Type

203: THT Version

Height

1: 15.35mm

Supply Voltage

D: 5.0V

Output

A: HCMOS

E: Sinewave

Frequency

Frequency Control

0: No Tuning

1: ±0.15 to ±0.4ppm

Holdover Range

808: 8µs over 8 hours

824: 8µs over 24 hours

108: 1µs over 8 hours

Temperature Range

E: -40 to +85 °C

J: -20 to +70 °C

P: 0 to +50 °C

**Note: not all combination of options are available. Other specifications may be available upon request.*

Contact Information

USA:

100 Watts Street
Mt Holly Springs, PA 17065
Tel: 1.717.486.3411
Fax: 1.717.486.5920

Europe:

Landstrasse
74924 Neckarbischofsheim
Germany
Tel: +49 (0) 7268.801.0
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.