


SPECIFICATION CONTROL DRAWING

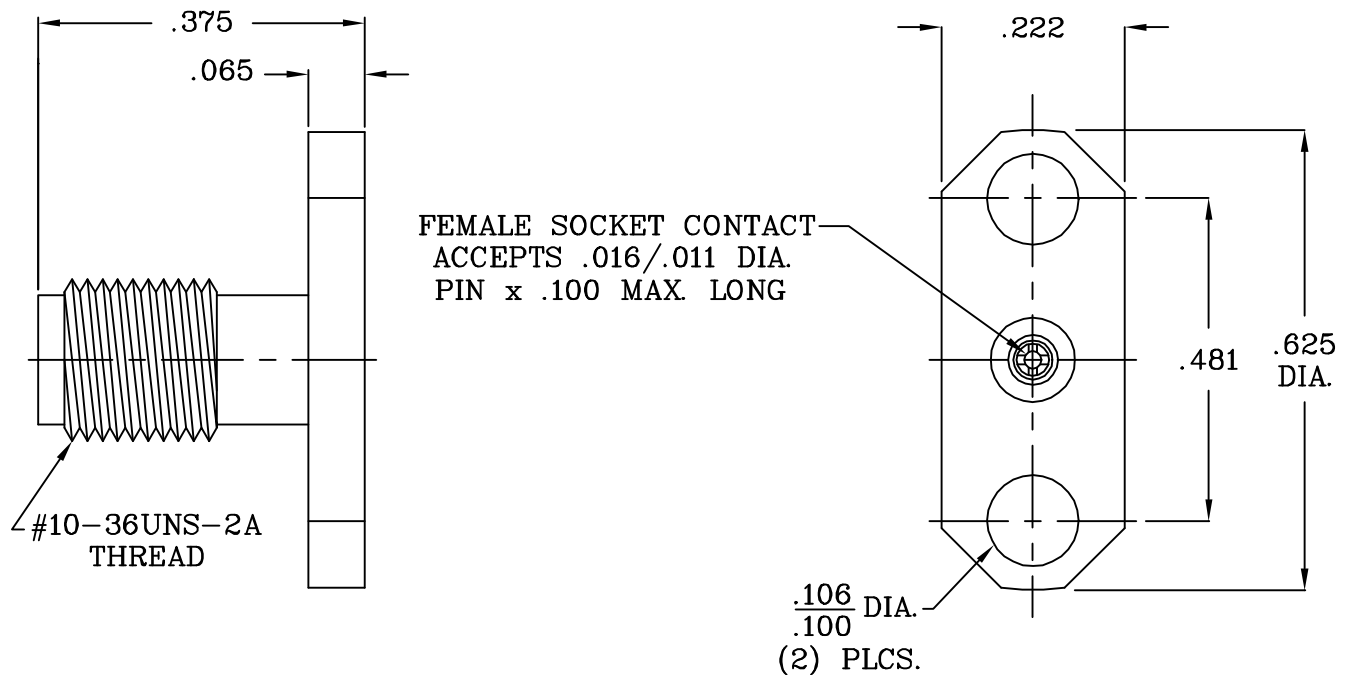

1. MATING INTERFACE DIMENSIONS SSMA JACK per DYNAWAVE MD-93

2. ELECTRICAL

FREQUENCY RANGE GHz	DC TO 36.0 GHz.
VSWR (MAX.) *	1.05 + .008 x FGHz
INSERTION LOSS (dB MAX.)	.035 dB x $\sqrt{\text{FGHz}}$
NOMINAL IMPEDANCE (OHMS)	50
VOLTAGE RATING (MAX. VRMS)	250
RF LEAKAGE (MIN. dB DOWN)	100 dB - FGHz.
TEMPERATURE RATING (DEGREES CENTIGRADE)	-65 ° c TO +165 ° c
DIELECTRIC WITHSTANDING VOLTAGE (MAX. VRMS)	750
INSULATION RESISTANCE (MIN. MEGOHMS)	5,000
CONTACT RESISTANCE	
• CENTER CONTACT (MAX. MILLIOHMS)	3.0
• OUTER CONTACT (MAX. MILLIOHMS)	2.0

* TERMINATED IN A 50 OHM LOAD

REV.	DCN NO.	DATE	APP.	DIMENSIONS ARE IN INCHES TOLERANCES			 INCORPORATED HAVERHILL MA. 01830
AA	06-1166	3/24/03	DC	DECIMALS .X ± .030 .XX ± .010 .XXX ± .005	FRACTIONAL ± 1/64	ANGULAR X° ± 0' XX' ± 15'	
				SURFACE ROUGHNESS 63 ✓ MIL-STD 10.			
				DRAWN	SS	DATE 2/13/06	TITLE SSMA, JACK 2 HOLE FLANGE MOUNT FIELD REPLACEABLE
				APPROVED	DC	DATE 2/13/06	
				CODE IDENT. 2J899		SHEET 1 OF 2	DWG. NO. 9352-0081-6200

SPECIFICATION CONTROL DRAWING

3. MECHANICAL

CAPTIVATION-CENTER CONTACT

- MIN. AXIAL FORCE _____ 6.0 LBS.
- MIN. RADIAL TORQUE _____ N/A

CENTER CONTACT AXIAL FORCES

- INSERTION (MAX. OUNCES) _____ INTERFACE: 48.0; REAR 32.0
- WITHDRAWAL (MIN. OUNCES) _____ INTERFACE: 2.0; REAR 1.0

CONNECTOR ENGAGEMENT/DISENGAGEMENT (MAX. IN. LBS.) _____ 2.0

CONNECTOR DURABILITY (MIN. CYCLES) _____ 500

RECOMMENDED MATING TORQUE _____ 6 - 8 IN. LBS.

4. ENVIRONMENTAL

TEMPERATURE CYCLING _____ MIL-STD-202, METHOD 102, COND. C (-65 ° c TO + 200 ° c)

SHOCK _____ MIL-STD-202, METHOD 213, COND. I (100 G's)

VIBRATION _____ MIL-STD-202, METHOD 204, COND. D (20 G's)

MOISTURE RESISTANCE _____ MIL-STD-202, METHOD 106, LESS STEP 7b

CORROSION _____ MIL-STD-202, METHOD 101, COND. B (48 HOURS)

BAROMETRIC PRESSURE (ALTITUDE) _____ MIL-STD-202, METHOD 105, COND. C (70,000 FT.) (190 VRMS)

5. MATERIAL

BODY _____ STAINLESS STEEL PER AMS-5640, TYPE 303, COND. A.

CONTACT _____ BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, COND .H.T.

INSULATOR _____ TEFLON PER MIL-P-19466 AND L-P-403, TYPE I

6. FINISH

BODY _____ PASSIVATE PER QQ-P-35A. TYPE 1

CONTACT _____ GOLD PER MIL-G-45204, TYPE II, GRADE C, CLASS 2
(.000100 MINIMUM THICKNESS) OVER NICKEL, PER
QQ-N-290, CLASS 1 (.000100 MINIMUM THICKNESS) OVER
COPPER PER MIL-C-14550 (.000010 MINIMUM THICKNESS).

INSULATOR _____ N/A