
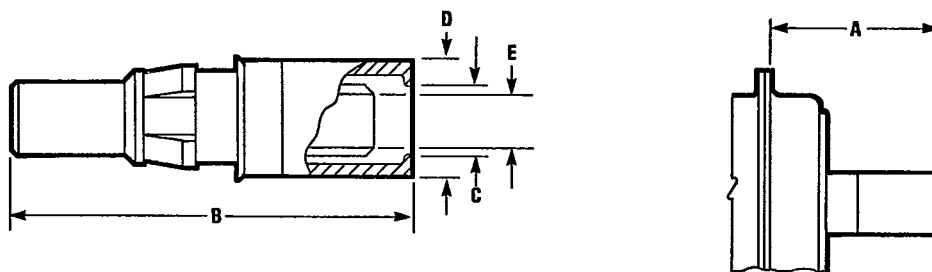




**D-Subminiature  
Coaxial Contacts**

50 Ohm  
Matched  
Impedance

**50 Ohm Matched Impedance Plug**



**50 Ohm Matched Impedance Receptacle**

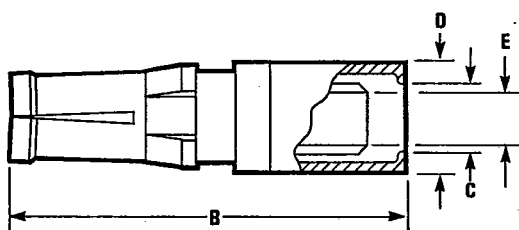

Photos are 1 1/2 x actual size


**Ordering Information**

**Dimensions**

Type	Catalog Number	A		B		C		D		E		Cable
		in	mm	in	mm	in	mm	in	mm	in	mm	
Plug	CN0961-P26S7	.417	10.597	.687	17.45	.138	3.50	.192	4.87	.089	2.26	UT 85 (Semi Rigid)
Receptacle	CN0961-R26S7	.417	10.597	.687	17.45	.138	3.50	.192	4.87	.089	2.26	UT 85 (Semi Rigid)

**50 Ohm Matched Impedance Coax Contacts**

(UT 85 Cable Only)



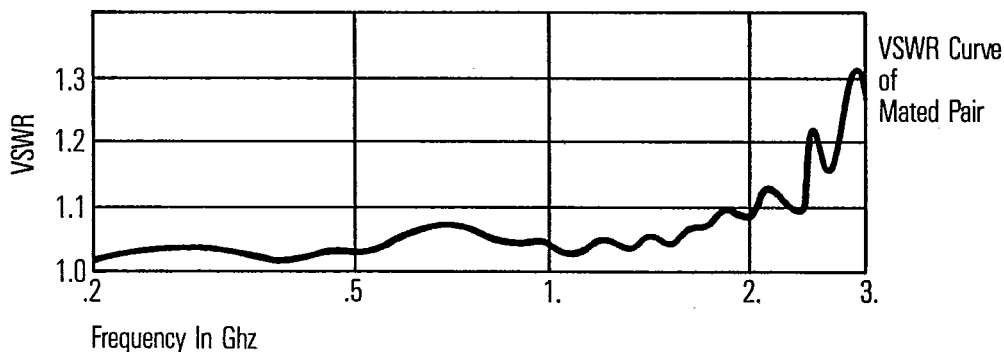


Other special designs available: consult factory.

# 50 Ohm Matched Impedance



## 50 Ohm Matched Impedance Plug

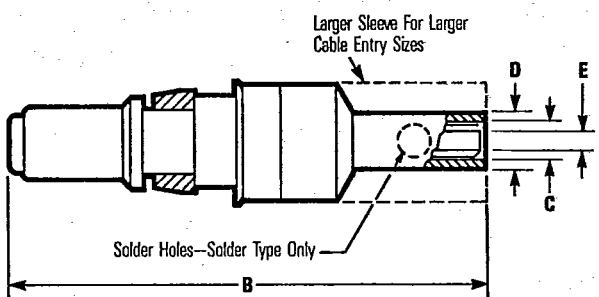




Photos are 1 1/2 x actual size

### Ordering Information

### Dimensions

Catalog Number	A		B		C		D		E		Cable
	in	mm	in	mm	in	mm	in	mm	in	mm	
CN0961-P25C5	.739	18.77	.930	23.62	.120	3.05	.145	3.68	.067	1.70	RG 316
CN0961-P24S5	.520	13.21	.720	18.29	.192	4.88	.218	5.54	.145	3.68	RG 402 (.141 Semi Rigid)
CN0961-P23C5	1.040	26.42	.837	21.26	.202	5.13	.235	5.97	.125	3.18	RG58 (Belden YR20622)
CN0961-P27C5	.930	23.62	1.130	28.70	.225	5.72	.250	6.35	.160	4.06	Gore Type II Cable
CN0961-P28C5	.737	18.72	.930	23.62	.093	2.36	.117	2.97	.040	1.02	RG 178

## 50 Ohm Matched Impedance Receptacle

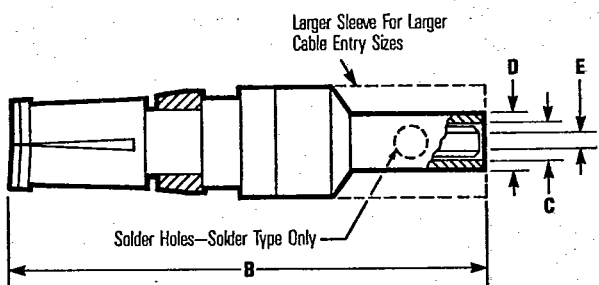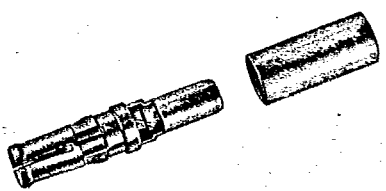

Photos are 1 1/2 x actual size

### Ordering Information

### Dimensions

Catalog Number	A		B		C		D		E		Cable
	in	mm	in	mm	in	mm	in	mm	in	mm	
CN0961-R25C5	.739	18.77	.930	23.62	.120	3.05	.145	3.68	.067	1.70	RG 316
CN0961-R24S5	.520	13.21	.720	18.29	.192	4.88	.218	5.54	.145	3.68	RG 402 (.141 Semi Rigid)
CN0961-R23C5	1.040	26.42	.837	21.26	.202	5.13	.235	5.97	.125	3.18	RG58 (Belden YR20621)
CN0961-R27C5	.930	23.62	1.130	28.70	.225	5.72	.250	6.35	.160	4.06	Gore Type II Cable
CN0961-R28C5	.737	18.72	.930	23.62	.093	2.36	.117	2.97	.040	1.02	RG 178