


Miniature Surface Mount Schottky Detectors



RLC Electronics' miniature surface mount detectors utilize a zero-bias Schottky design. The microwave power is coupled directly to the extremely small components reducing package parasitics and transition mismatches. This

design results in a low VSWR and a flat, smooth output over a wide bandwidth. Standard unit has frequency range of .01 to 4 GHz, with option of negative or positive output. A higher frequency option is available up to 12.4 GHz.

Specifications

CR-1-2

Frequency Range	.01-4 GHz	.01-12.4 GHz (Option-12)
Frequency Response (Max) .01-4 GHz	+/-0.3 dB	+/-0.3 dB
.01-12.4 GHz	-----	+/-0.5 dB
VSWR (Max) .01-4 GHz	1.30	1.30
4-12.4 GHz	-----	1.70
Typical Sensitivity (Pin< - 30 dBm)	0.5 mV/uW	0.5 mV/uW

Input Power: 100 mW maximum (peak or average)

Temperature Range: -55 °C to +100 °C

Video resistance: 5000 ohms nominal

Bias: None


Input/Output Connections: .018 diameter pins

To designate the detector desired use:

- (1) 401 for negative output, 402 for positive output
 (2) -12 for 12.4 GHz option

Example: CR-401-12 is a .01-12.4 GHz, negative output detector.

OUTLINE DRAWING

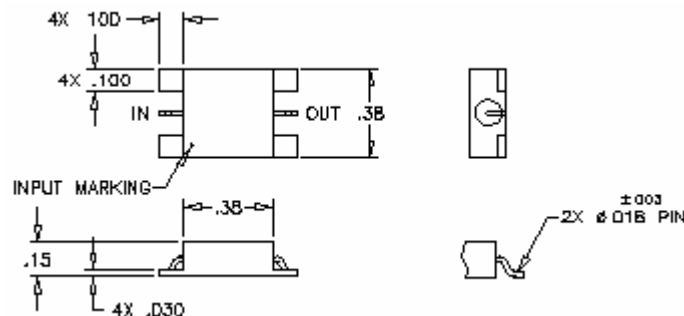

Specifications subject to change without notification.

Tolerances unless otherwise specified are .xx +/- .02, .xxx +/- .005

Specials requiring closer tolerances, different frequency ranges, special connectors different materials, finishes, etc. can be furnished upon request.



RLC ELECTRONICS, INC.

83 Radio Circle, Mount Kisco, New York 10549 Telephone 914-241-1334 Fax 914-241-1753
 e-mail: sales@rlcelectronics.com www.rlcelectronics.com