


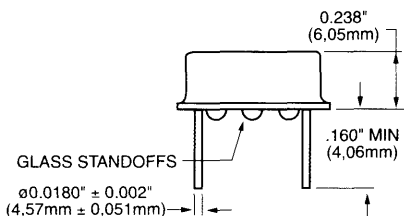


VFHS85

HCMOS Half Size DIP
Clock Oscillators

FEATURES

- Tristate Available
- Extended Temperature Ranges
- Tight Symmetry Available
- Common Footprint



All dimensions are typical unless otherwise specified.

Creating a Part Number

VFHS85 [] - [] - FREQ.

FREQUENCY STABILITY	
Code	Specification
S	±20 ppm
A	±25 ppm
B	±50 ppm
B	±100 ppm (std.)
C	±500 ppm

DUTY CYCLE	
Code	Specification
HH	±2.5%
H	±5%
	±10% (std.)

INPUT VOLTAGE	
Code	Specification
L	3.3 Volt ±5%
	5.0 Volt ±5% (std.)

LEAD CONFIGURATION	
Code	Specification
GR	Gull Wing (std.)
G	Gull Wing (std.)
	Through Hole (std.)

OUTPUT	
Code	Specification
T	Tristate
	non-tristate (std.)

OPERATIONAL TEMP. RANGE	
Code	Specification
	0°C to +70°C (std.)
1	-40°C to +85°C
2	-55°C to +125°C

Example: VFHS85BHL-1GR-53.125MHz: Frequency Stability ±20ppm, Duty Cycle ±5.0%, Input Voltage 3.3 Volt ±5%, Operational Temperature -40°C to +85°C, Gull Wing, Frequency 53.125MHz.

Absolute Max. Ratings	Parameter	Symb	Condition	Min	Typ	Max	Unit	Note	
	Input Break Down Voltage	V _{cc}		-0.5		7.0	V		
Electrical	Storage Temp.	T _s		-55		+125	°C		
	Frequency Range	F		1.0		70	MHz		
	Frequency Stability	ΔF/F	Overall conditions including: calibration, temp., aging 10 yrs, shock, vibration			±100	ppm	1	
	Input Voltage	V _{cc}		4.75 3.15	5.00 3.30	5.25 3.45	V	Std. LV Opt.	
	Input Current	I _{cc}	No load			50	mA	2	
	Load	15pF or 10 LSTTL gates							
	Duty Cycle		@50% V _{cc}	40	50	60	%	3	
	Rise/Fall Time	T _r /T _f				6	ns		
	Logic "1" Level	V _{oh}	Max Load	0.9V _{cc}			V		
	Logic "0" Level	V _{ol}	Max Load			0.1V _{cc}			
	Start-up Time	T _s			2	10	ms		
	Phase Jitter		1σ			1	ps	f _i >1KHz	
	Tristate Function	Input HIGH (>2.5V) or floating: ACTIVE Input LOW (<0.5V): INFINITE IMPEDANCE							4
	Enable/ Disable Time	Te/Td				100	ns		
Environmental and Mechanical	Operating Temperature Range		0°C to +70°C (-40°C to +85°C, and -55°C to +125°C available)						
	Mechanical Shock		Per MIL-STD-202, Method 213, Cond. E						
	Thermal Shock		Per MIL-STD-883, Method 1011, Cond. A						
	Vibration		Per MIL-STD-883, Method 2007, Cond. A						
	Soldering Conditions		260°C, for 10s, Max.						
	Hermetic Seal		Leak rate less than 5 x 10 ⁻⁸ atm.cc/s of helium						
Local	Pin Out		Pin #1-N/C or tristate Pin #5-Output		Pin #4-Ground, Case Pin #8-V _{cc}				

Notes:

1. ±50ppm, ±20ppm stability available.
2. Current is load and frequency dependent.
3. ±5%, and ±2.5% duty cycle available.
4. Tristate available.

All specifications are subject to change without notice.