

## EPC3096-X


- Split Bobbin Construction
- Dual Primaries : 115 V / 230 V
- UL 94V-0 Recognized Components
- UL 1446 Class B Insulation System
- Meets or exceeds CSA/TUV/VDE Specifications for Creepage, Clearance and Dielectric Strength

### Electrical Parameters @ 25° C


Part Number	Primary Voltage		Secondary Voltage		Secondary Current (A-Rms)		Power Rating (VA)
	Parallel Connection	Series Connection	Parallel Connection	Series Connection	Parallel Connection	Series Connection	
EPC3096-1	115	230	5.0	10	0.50	0.25	2.4
EPC3096-2	115	230	6.3	12.6	0.40	0.20	2.4
EPC3096-3	115	230	8.0	16	0.30	0.15	2.4
EPC3096-4	115	230	10	20	0.24	0.12	2.4
EPC3096-5	115	230	12	24	0.20	0.10	2.4
EPC3096-6	115	230	14	28	0.17	0.085	2.4
EPC3096-7	115	230	18	36	0.13	0.065	2.4
EPC3096-8	115	230	24	48	0.10	0.050	2.4
EPC3096-9	115	230	28	56	0.09	0.045	2.4
EPC3096-10	115	230	60	120	0.04	0.020	2.4

• Switching Frequency : 50 Hz - 500 Hz • Isolation : 2500 Vrms •

### Package

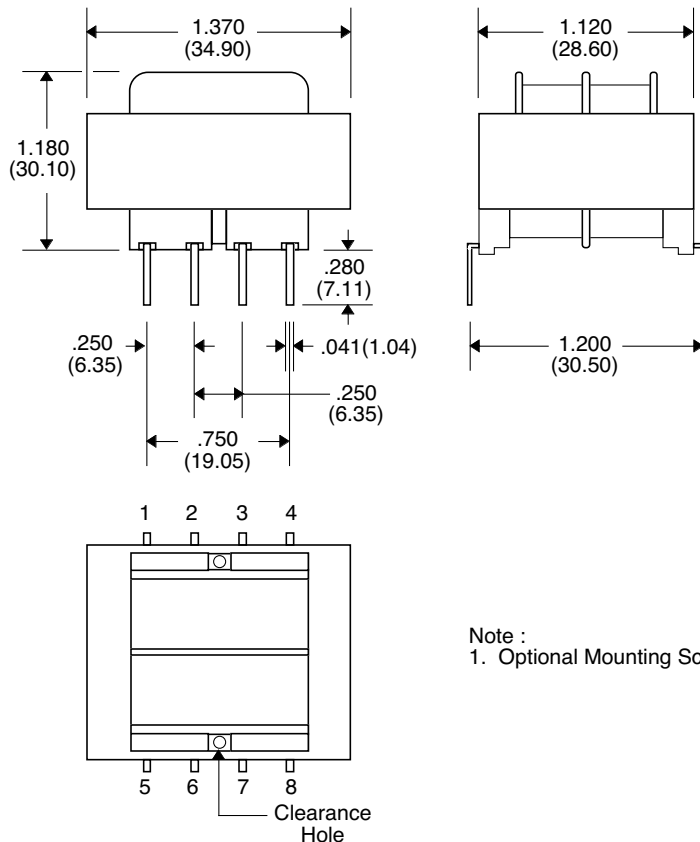

### Schematic



Note :  
 1. Optional Mounting Screws and Nut : None

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25